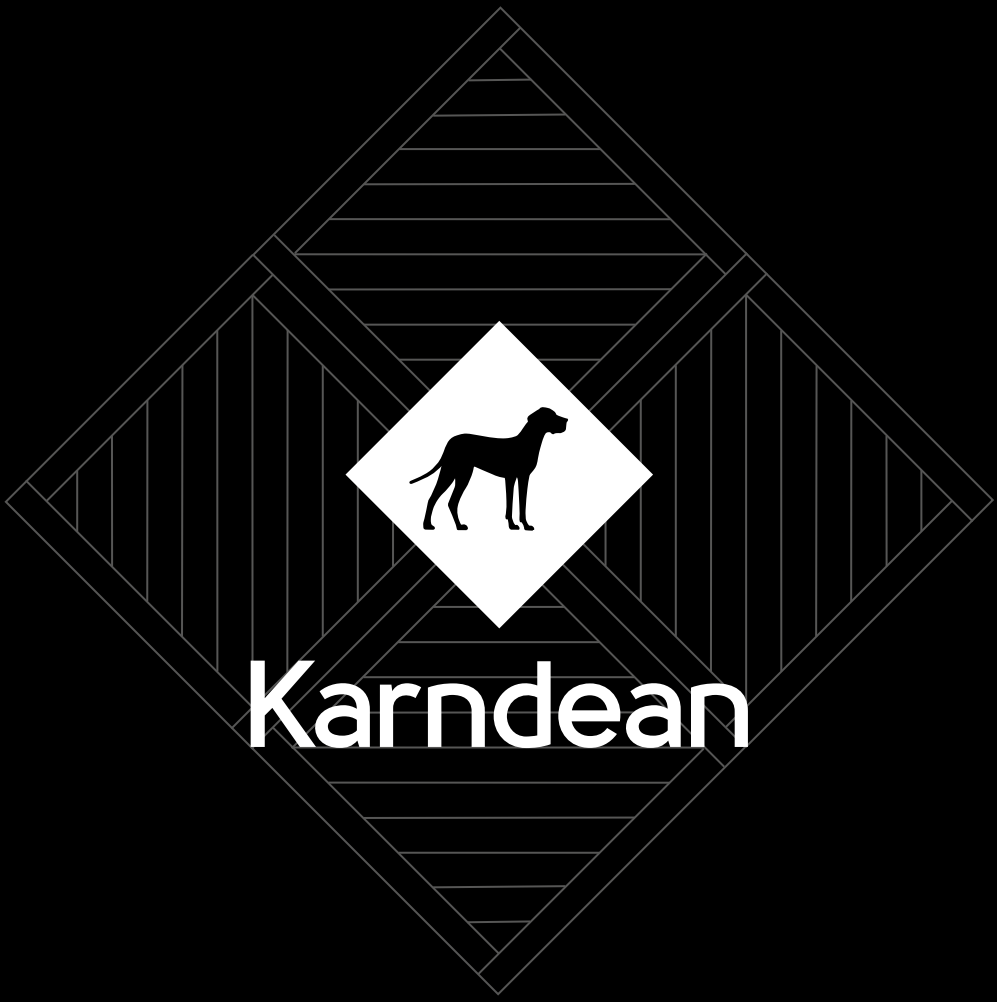

PRODUCT GUIDE

COMMERCIAL FLOORING

ISSUE 3.1

Karndean

PRODUCT GUIDE

Your complete guide to
Karndean Commercial flooring

© 2026 Karndean International Ltd.

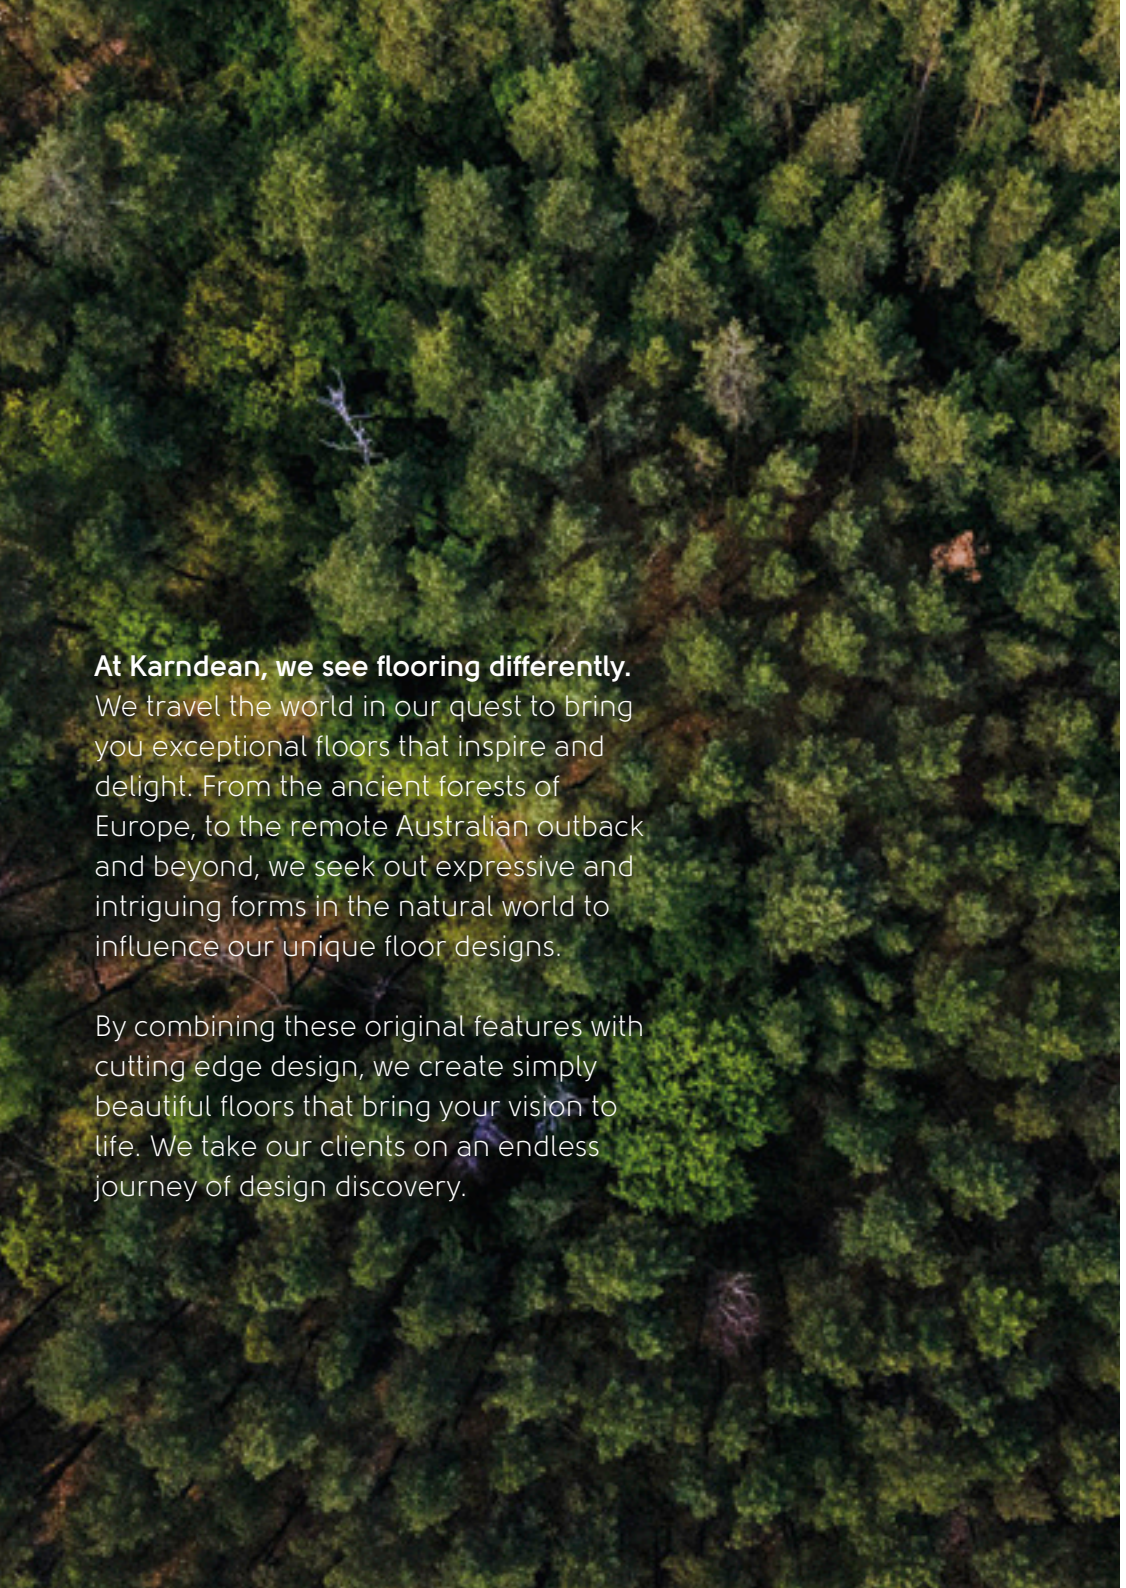

At Karndean, we see flooring differently. We travel the world in our quest to bring you exceptional floors that inspire and delight. From the ancient forests of Europe, to the remote Australian outback and beyond, we seek out expressive and intriguing forms in the natural world to influence our unique floor designs.

By combining these original features with cutting edge design, we create simply beautiful floors that bring your vision to life. We take our clients on an endless journey of design discovery.

CONTENTS

Why Karndean? **6**

Our fitting formats **8**

Our collections **10**

Gluedown **29**

Why gluedown? **31**
Art Select wood **33**
Art Select stone **47**
Van Gogh wood **57**
Van Gogh stone **75**
Opus wood **81**
Opus stone **89**
Knight Tile wood **97**
Knight Tile stone & abstract **111**
Knight Tile Quiet **121**
Heritage Collection abstract **125**
Kaleidoscope abstract **137**

Design components **149**

Design strips **150**
Solid colours **152**
Bespoke features & logos **154**

Rigid core **157**

Why rigid core? **159**
Van Gogh wood **161**
Van Gogh stone **169**
Knight Tile wood **175**
Knight Tile stone **181**
Korlok Regent wood **187**

Loose lay **197**

Why loose lay? **199**
Karndean LooseLay wood **201**
Karndean LooseLay stone **207**

Support **213**

Cleaning guide **214**
Our warranty **216**
Installation guidelines **217**
Versilay InstaShield® **218**
Versilay Classic® **220**
Technical service charter **222**
Commercial project registration **223**
Website support **224**
Sample service **225**
Karndean Evolve® **226**
Karndean Training Academy **228**
Showrooms **229**

Product index **230**

WHY KARNDEAN?

Five decades ago, our family-owned business was founded on innovation, bold action and a pioneering spirit. Fifty years later, those same ideals guide us forward. Along with exceptional customer service and unmatched quality, discover the benefits of specifying Karndean.

K-Guard+®
We use K-Guard+® surface technology for scuff and stain resistance ensuring there is no need to apply an additional surface treatment following installation.

Realistic designs
Inspired by nature, our products are designed in-house and realistically replicate the look and feel of wood and stone materials.

Compatible with underfloor heating
For added warmth, our flooring is perfectly suitable for underfloor heating systems up to 27°C.

Durable
Unlike other flooring alternatives, Karndean gives you the look and feel of natural products but with the durability and resilience of luxury vinyl.

Waterproof
Unlike laminate and engineered hardwoods, our floors are impervious to water and will not swell, crack or warp when wet, making them perfect for kitchens, office tea points and washrooms.

Enhanced safety
Working in demanding environments that have been assessed as having high slip risk can be dangerous without the right flooring. Our Opus collection is designed and tested to meet the toughest demands.

Warranty
All Karndean floors come with a commercial warranty of up to 20 years, depending on the product range specified.

Hygienic
Our floors don't hold dust, dirt, pollen or other allergens.

Acoustic qualities
Karndean Designflooring is quieter underfoot compared to most hard flooring alternatives. Our loose lay and rigid core products come with a backing that reduces noise transfer to rooms below, making it ideal for apartment blocks and any upstairs rooms.

Installation flexibility
Our dual format designs are available in both gluedown and rigid core formats. With the integration of rigid core technology into a selection of designs, specifiers and designers now have the flexibility to use the same design but with a choice of format that's suitable for the environment.

Low maintenance
The commercial cleaning and maintenance regime is simple and can be carried out by hand or using a mechanical cleaning apparatus. With Karndean, you don't have to worry about any sanding, refinishing, staining or varnishing either.

OUR FITTING FORMATS

Choose gluedown when:

- Creating a floor with interesting laying patterns, design strips and decorative borders.
- Mixing stone and wood designs to create a completely bespoke floor.
- Laying on top of a completely flat, dry subfloor.

See page 31 for more details.

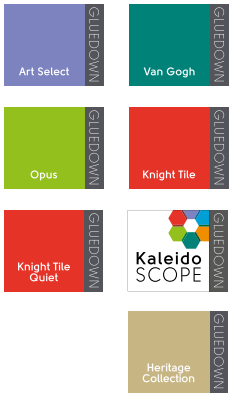

Choose rigid core when:

- Additional sound reduction to the floor below is required, such as in offices or apartments.
- Reduced installation time is needed.
- Installing over an existing floor such as ceramic tiles or floorboards, or uneven subfloor.
- Installing over a damp subfloor, sometimes found in new builds or extensions.

See page 159 for more details.



Choose loose lay when:

- Additional sound reduction to the floor below is required, such as in offices or apartments.
- Reduced installation time is needed.
- Installing over a smooth or damp subfloor, sometimes found in new builds or extensions.
- Easy access to underfloor panels is needed.

See page 199 for more details.





Knight Tile: Wells Acacia **SM-KP160**

OUR COLLECTIONS

Range	Bevelled Edge	Plank Size (mm)	Tile Size (mm)	Thickness (mm)	Wear Layer (mm)	ISO 10874 Classification: Domestic Use	Domestic Warranty^*	Commercial Use	Commercial Warranty^	Light Industrial Use	Light Industrial Warranty^*
Gluedown											
Art Select	Standard	1422.4 x 228.6 1219.2 x 177.8 1219.2 x 114.3 914.4 x 152.4 711.2 x 114.3 457.2 x 76.2 228.6 x 76.2 114.3, 152.4, and 228.6 widths in various lengths 114.3 x 114.3 / 76.2 x 304.8	457.2 x 609.6 457.2 x 914.4 457.2 x 457.2	3	0.7	23	Lifetime**	34	20 years	43	20 years
Van Gogh	Micro	1422.4 x 228.6 1219.2 x 177.8 711.2 x 177.8 609.6 x 609.6 457.2 x 114.3	457.2 x 609.6 457.2 x 914.4	3	0.55	23	Lifetime**	33	15 years	42	15 years
Heritage Collection	Standard	Various	Various	2.5	0.55	23	Lifetime**	33	15 years±	42	15 years
Opus	Micro	1219.2 x 228.6 457.2 x 76.2	457.2 x 457.2 457.2 x 609.6 609.6 x 609.6	2.5	0.55	23	Lifetime**	33	15 years	42	15 years
Knight Tile	No	1219.2 x 228.6 914.4 x 152.4 457.2 x 76.2	230.0 x 230.0 304.8 x 304.8 304.8 x 457.2	2	0.3	23	Lifetime**	31	10 years±	–	–
Knight Tile Quiet	Micro	914.4 x 152.4	N/A	3	0.3	23	Lifetime**	31	10 years±	–	–
Kaleidoscope	Please contact your commercial specification manager for further details.										
Rigid core											
Korlok Regent	Micro	1510.0 x 220.0 720.1 x 119.9 1074.9 x 214.9 938.5 x 305.1	N/A	8.0	0.55	23	Lifetime**	33	15 years	–	–
Van Gogh	Micro	1420.0 x 225.0 708.0 x 177.0	457.0 x 600.0	6.5	0.55	23	Lifetime**	33	15 years	–	–
Knight Tile	No	1220.0 x 225.0 914.4 x 150.0	304.8 x 457.2	4.5	0.3	23	Lifetime**	31	10 years	–	–
Loose lay											
Karndean LooseLay	No	1050.0 x 250.0 1500.0 x 250.0	500.0 x 610.0 1000.0 x 1000.0	4.5	0.55	23	Lifetime**	33	15 years	42	15 years

* Warranty applies when used at ISO 10874 classification stated.
** Lifetime Warranty defined as 35 years.
± Commercial Light Duty use only.
^ Subject to terms. Please see our website.

Class	Examples of areas of use
23	Living rooms, entrance halls, dining rooms, bedrooms and corridors
31	Hotel bedrooms, conference rooms, small offices
32	Classrooms, small offices, hotels, boutiques
33	Corridors, department stores, lobbies, schools, open plan offices
34	Multi-purpose halls, counter halls, department stores
41	Electronic assembly, precision engineering
42	Storage rooms, electronic assembly
43	Storage rooms, production halls

WOOD AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile | Knight Tile Quiet
Karndean LooseLay | Korlok Regent



VGW80T



KP153



RL29



RL21



SM-RL21



RL38



WP439-SR



SM-RL29



SM-RKP9001



CP-RKP9001



LLP95



KP159



VGW149T



SM-VGW149T



VGW148T



VGW8105
RKP8105



KP154 | KP154-QT
SCB-KP154-6



SM-VGW8105
SM-VGW8105-RKP



SM-KP154



RL35



LLP306



VGW126T



SM-VGW126T



RL22



SM-RL22

Opus

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.



KP138 | KP138-QT
SCB-KP138-6



RL30



VGW113T



WP435-SR



SM-VGW8239



CL-RKP9001



RKP9001



SM-VGW120T



VGW120T



SM-RL26



SM-VGW148T



KP147



CP-RKP9002



KP99 | KP99-QT
SCB-KP99-6



RL26

RL32

SM-RKP9002

KP95
SCB-KP95-6

RKP9002

SM-VGW8116
SM-VGW8116-RKP

CL-RKP9002

SM-KP95

LLP92

SM-KP99

SM-KP144

WOOD AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile | Knight Tile Quiet
Karndean LooseLay | Korlok Regent



VGW8239



RL34



VGW82T



CL-RKP9004



RL39



SM-KP138



WP440-SR



CH-KP156
SCB-CH-KP156



SM-RL30



LLP308



CH-KP99
SCB-CH-KP99



CP-RKP9003



KP144
SCB-KP144-6



VGW8101
RKP8101



KP152



CH-KP95
SCB-CH-KP95



RL47



LLP307



VGW8241



CL-RKP9003



SM-RL24



RL24



VGW8116
RKP8116



SM-VGW8241



VGW81T



CP-RKP9004



RL46



SBW-RL12



RL12



RL27



SM-RKP9004



AP07



KP148



RL33



LLP301



RKP9004



WP438-SR



RL42



SM-RL27



RL37

SM-WP442-SR

RL41

SM-VGW81T

AP08

KP103

RKP9003

SM-RKP9003

VGW94T

WP422-SR

SM-RKP9006

WOOD AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile | Knight Tile Quiet
Karndean LooseLay | Korlok Regent



VGW8112
RKP8112



WP414-SR



HC06



VGW123T



SM-RL28



LLP112



VGW89T



AP03



RL28



RKP9006



WP436-SR



KP161



KP98



KP164



WP441-SR



SM-KP161



EW02



AP05



SM-WP441-SR



SBW-HC01



SM-KP164



RL05



EW03



AP02



VGW8110
RKP8110



VGW87T



KP165



CL-RKP9006



SM-KP165



SM-WP443-SR



SM-VGW150T



SM-VGW145T



RL36



RL40



KP96



KP163
KP163-QT



PAN-VGW145T



VGW150T



CP-RKP9006



LLP102

SM-VGW8110

LLP315

WP444-SR

VGW70T

RL02

VGW145T

HC01

RPL-EW21

EW21

SM-VGW86T

WOOD AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile | Knight Tile Quiet
Karndean LooseLay | Korlok Regent



SM-VGW146T



RL13



VGW146T



PAN-VGW146T



VGW147T



SM-RKP9005



LLP106



KP94 | KP94-QT
SCB-KP94-6



SM-KP94



KP146
SCB-KP146-6



HC02



AP06



VGW93T



WP443-SR



SM-KP155



KP97



SM-VGW8237



SM-VGW122T
SM-VGW122T-RKP



CP-RKP9005



VGW8240



VGW53T



VGW86T



VGW8237



RL25



KP155



PAN-VGW147T



SM-VGW147T



SM-WP445-SR



WP445-SR



WP437-SR



SM-KP146



RKP9005



SM-VGW121T
SM-VGW121T-RKP



SM-WP437-SR



VGW115T



CL-RKP9005



VGW121T
VGW121T-RKP



LLP317



VGW52T



LLP105

VGW122T
VGW122T-RKP

VGW8115
RKP8115

VGW8111
RKP8111

SBW-RL01

LLP113

RL20

SM-VGW8240

RL48

KP145

LLP108

WOOD AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile | Knight Tile Quiet
Karndean LooseLay | Korlok Regent



KP160



SM-KP160



AP01



VGW8117
RKP8117



RL23



SM-RL20



SM-RL31



KP151



VGW8103



SM-VGW8117



RL31



LLP310



SM-RL23



VGW85T



SM-VGW115T



RL01



SM-VGW85T


Van Gogh: Natural Prime Oak **SM-VGW115T**

STONE AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile

Karndean LooseLay



ST26
SCB-ST26-18



LM35



ST31



SP816-SR



SP813-SR



VGT2413



VGT3021



LM32



SP211-SR



VGT2401
RKT2401



LM33



ST17



ST21
SCB-ST21-18



LM37



VGT2423



ST18
SCB-ST18-18



ST33



LM36



LM44



ST12



SP111-SR



LM38



LM40



ST29



VGT2405
RKT2405



SP124-SR



LM42



LM47



LLT216



LM45



LG-LLT219



LM30



LM41



ST22



ST16
SCB-ST16-18



ST20
SCB-ST20-18



ST13



LLT201
LG-LLT201



LM46



VGT2410

LM39

VGT3018

VGT3019

ST34

ST14
SCB-ST14-18

LM43

SP812-SR

ST32

SP216-SR

LM05

STONE AT A GLANCE

Art Select | Van Gogh | Opus | Knight Tile
Karndean LooseLay



VGT2422



LM34



ST15



LLT203



LM31



LM22



VGT2420



LM06



SP115-SR



VGT2406
RKT2406



LM48



LM49



SP123-SR

ABSTRACT AT A GLANCE

Solid colours



V11



V12



V13



V14



V15



V16



V17



V18



V19



V20

ABSTRACT AT A GLANCE

Opus | Knight Tile | Heritage Collection | Kaleidoscope



SP121-SR



SP122-SR



MONT-01



CLIF-01



MONT-06



LANS-02



LANS-04



KAL03



CLIF-02



CLIF-04



SP219



LANS-01



KAL04



LANS-03



SP120-SR



CLIF-03



KAL11



MONT-04



KAL07



KAL14



MONT-05



SP220



KAL09



KAL05



KAL06



MONT-03



KAL01



KAL02



MONT-07



MONT-02



ST37



ST36



KAL10



KAL08



SP119-SR



KAL12



ST38



ST35



MAYF-02



KAL13

MAYF-01

MONT-08

GLUEDOWN



Art Select: Calacatta d'Oro **LM33** | Canterbury Ash **RL41**

WHY GLUEDOWN?

Our gluedown ranges offer our widest choice of colours and formats. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring.

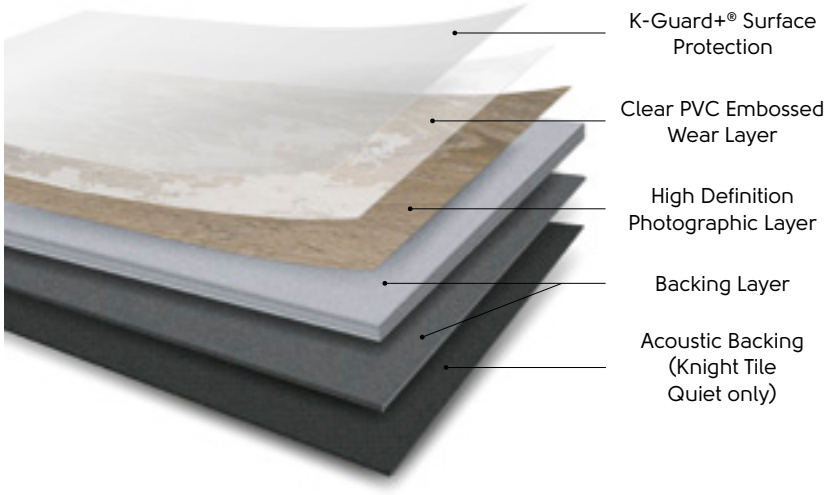

Gluedown benefits

Range of price points to suit different budgets.

No expansion gap required.

Available in a wide range of designs, colours, textures and sizes.

Design flexibility to achieve bespoke cut designs and laying patterns. Bring your vision to life with our bespoke cutting service.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light industrial Commercial Residential	20 years 20 years Lifetime warranty
Mass per unit area	EN ISO 23997	5015 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874: Light industrial EN ISO 10874: Commercial EN ISO 10874: Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass ≥6
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL_w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass ≤0.1 mm
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0147 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN16165 Annex B / DIN 51130	DS Scan QR code below to view full technical data.
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2017/AS/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/AS/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Art Select.

ART SELECT
WOOD

114.3mm x 114.3mm / 76.2mm x 304.8mm (4.5" x 4.5" / 3.0" x 12.0")



Dawn Oak **SBW-HC01**



Storm Oak **SBW-RL12**



Spring Oak **SBW-RL01**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.484m² / 192 pieces
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

114.3mm, 152.4mm and 228.6mm (4.5", 6.0", 9.0" widths and various lengths)



Reclaimed Chestnut **RPL-EW21**

HS

Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.902m² / 27 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

228.6mm x 76.2mm (9.0" x 3.0")



Spring Oak **AP01**



Dawn Oak **AP02**

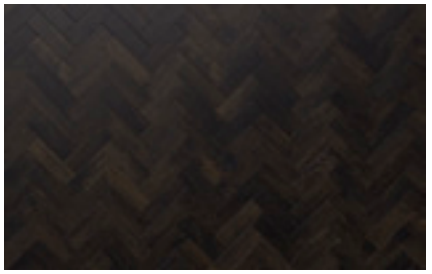

Midnight Oak **AP03**

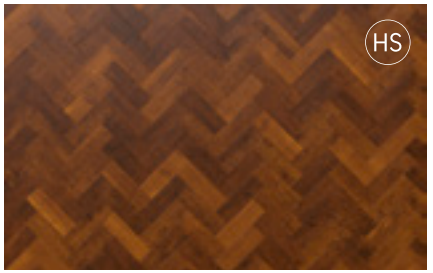

Spanish Cherry **AP05**



Morning Oak **AP06**



Storm Oak **AP07**



Salon Oak **AP08**

HS

Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 192 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

457.2mm x 76.2mm (18.0" x 3.0")



Prairie Oak **SM-RL20**



Glacier Oak **SM-RL21**



Mountain Oak **SM-RL22**

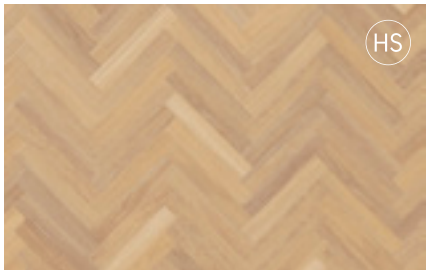

Savannah Oak **SM-RL23**



Dune Oak **SM-RL24**

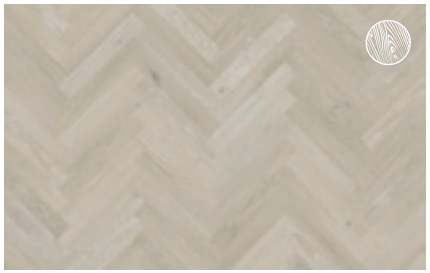
Clay Artisan Oak **SM-RL29**


Dove Artisan Oak **SM-RL30**

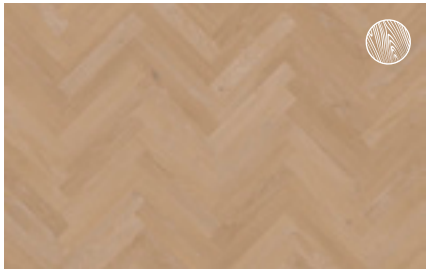
Golden Artisan Oak **SM-RL31**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 96 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

711.2mm x 114.3mm (28.0" x 4.5")



Basque Oak **SM-RL26**

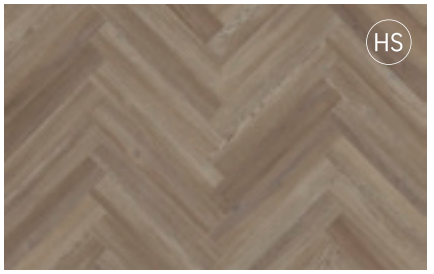

Bellota Oak **SM-RL27**

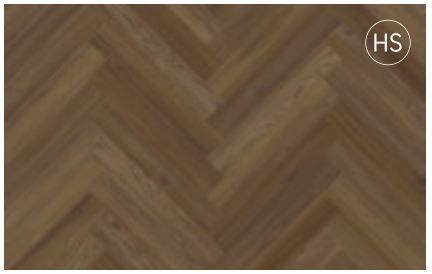

Serrano Oak **SM-RL28**

HS — Unique handscraped finish, creating a subtly textured, undulating surface.

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.252m² / 40 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

914.4mm x 152.4mm (36.0" x 6.0")


Dawn Oak **HC01**


Morning Oak **HC02**


Midnight Oak **HC06**


Hickory Peppercorn **EW02**


Hickory Nutmeg **EW03**

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

1219.2mm x 177.8mm (48.0" x 7.0")


Spring Oak **RL01**


Summer Oak **RL02**


Spanish Cherry **RL05**


Storm Oak **RL12**


Salon Oak **RL13**


Canvas Oak **RL34**

HS
Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.252m² / 15 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

1219.2mm x 114.3mm (48.0" x 4.5")



Canyon Oak **RL25**



Castle Hill Ash **RL39**



Summerhouse Ash **RL40**



Canterbury Ash **RL41**



Tolsford Ash **RL42**



Limed Silk Oak **RL46**



Limed Linen Oak **RL47**



Natural Oak **RL48**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification


Tolsford Ash **RL42**

1219.2mm x 177.8mm (48.0" x 7.0")



Damask Oak **RL35**



Merino Oak **RL36**



Tweed Oak **RL37**



Cotton Oak **RL38**

HS Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.252m² / 15 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

1422.4mm x 228.6mm (56.0" x 9.0")



Reclaimed Chestnut **EW21**



Prairie Oak **RL20**



Glacier Oak **RL21**



Mountain Oak **RL22**



Savannah Oak **RL23**



Dune Oak **RL24**



Basque Oak **RL26**

HS Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.252m² / 10 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification

1422.4mm x 228.6mm (56.0" x 9.0")



Bellota Oak **RL27**



Serrano Oak **RL28**



Clay Artisan Oak **RL29**



Dove Artisan Oak **RL30**



Golden Artisan Oak **RL31**



Pale Artisan Oak **RL32**



Grey Artisan Oak **RL33**



Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

HS

Unique handscraped finish, creating a subtly textured, undulating surface.

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.252m² / 10 planks
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 32 for full technical specification



Dove Artisan Oak **RL30**

GLUEDOWN
ART SELECT

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light industrial Commercial Residential	20 years 20 years Lifetime warranty
Mass per unit area	EN ISO 23997	5015 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874: Light industrial EN ISO 10874: Commercial EN ISO 10874: Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass ≥6
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL_w = 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass ≤0.1 mm
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0147 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN16165 Annex B / DIN 51130	DS Scan QR code below to view full technical data.
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2017/AS/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/AS/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Art Select.

ART SELECT
STONE

457.2mm x 457.2mm (18.0" x 18.0")



Ionic Marble **LM30***



Corinthian Marble **LM31**



Doric Marble **LM32**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 16 tiles
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 46 for full technical specification

* Displayed with design strips.



Ionic Marble **LM30** | Corinthian Marble **LM31** | Doric Marble **LM32**

GLUEDOWN
ART SELECT

457.2mm x 609.6mm (18.0" x 24.0")


Melbourne Slate **LM05**

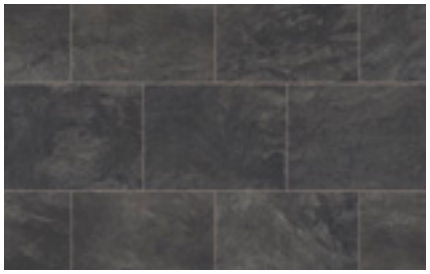
Canberra Slate **LM06***


Corris Slate **LM22***


Cambric Stone **LM46**


Brenner Quartzite **LM47**


Verona Quartzite **LM48***


Lago Quartzite **LM49**

Thickness: 3.0 mm **Wear Layer:** 0.7 mm **Bevelled edge:** Standard	**Box Quantity:** 3.345m² / 12 tiles **Commercial Warranty:** 20 years **Domestic Warranty:** Lifetime	See page 46 for full technical specification

* Displayed with design strips.

457.2mm x 914.4mm (18.0" x 36.0")

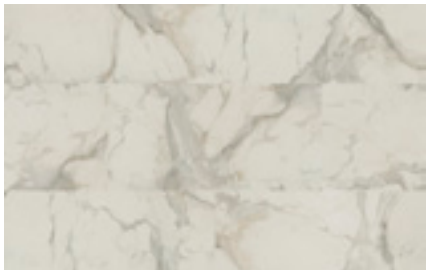
Calacatta d'Oro **LM33**

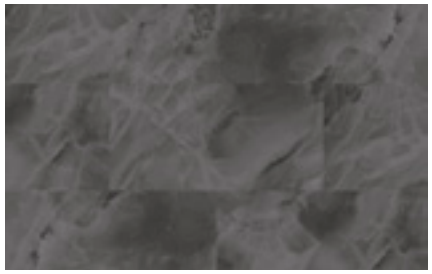
Black Onyx **LM34**


Pearl Onyx **LM35**


Rose Onyx **LM36**


Silk Travertino **LM37**


Champagne Travertino **LM38**


Caliza Classico **LM39***


Pavimento Crema **LM40**

Thickness: 3.0 mm **Wear Layer:** 0.7 mm **Bevelled edge:** Standard	**Box Quantity:** 3.345m² / 8 tiles **Commercial Warranty:** 20 years **Domestic Warranty:** Lifetime	See page 46 for full technical specification

* Displayed with design strips.

457.2mm x 914.4mm (18.0" x 36.0")



Pavimento Grigio **LM41***



Pavimento Bianco **LM42**



Brezza Ceppo **LM43**



Sabbia Ceppo **LM44**

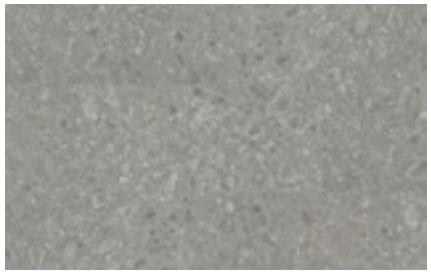

Naturale Ceppo **LM45**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Bevelled edge: Standard

Box Quantity: 3.345m² / 8 tiles
Commercial Warranty: 20 years
Domestic Warranty: Lifetime

See page 46 for full technical specification

* Displayed with design strips.



Pavimento Grigio **LM41**

GLUEDOWN
ART SELECT

Art Select GLUEDOWN

A quick reference guide for each design in our Art Select wood and stone range.

			GLUEDOWN		
Wood	**Name**	**Plank**	**Herringbone**	**Basketweave**	**Random Plank**
	Canyon Oak	RL25			
	Basque Oak	RL26	SM-RL26	-	-
	Bellota Oak	RL27	SM-RL27	-	-
	Canterbury Ash	RL41	-	-	-
	Canvas Oak	RL34	-	-	-
	Castle Hill Ash	RL39	-	-	-
	Clay Artisan Oak	RL29	SM-RL29	-	-
	Cotton Oak	RL38	-	-	-
	Damask Oak	RL35	-	-	-
	Dawn Oak	HC01	AP02	SBW-HC01	-
	Dove Artisan Oak	RL30	SM-RL30	-	-
	Dune Oak	RL24	SM-RL24	-	-
	Glacier Oak	RL21	SM-RL21	-	-
	Golden Artisan Oak	RL31	SM-RL31	-	-
	Grey Artisan Oak	RL33	-	-	-
	Hickory Nutmeg	EW03	-	-	-
	Hickory Peppercorn	EW02	-	-	-
	Limed Linen Oak	RL47	-	-	-
	Limed Silk Oak	RL46	-	-	-
	Merino Oak	RL36	-	-	-
	Midnight Oak	HC06	AP03	-	-
	Morning Oak	HC02	AP06	-	-
	Mountain Oak	RL22	SM-RL22	-	-
	Natural Oak	RL48	-	-	-
	Pale Artisan Oak	RL32	-	-	-
	Prairie Oak	RL20	SM-RL20	-	-
	Reclaimed Chestnut	EW21	-	-	RPL-EW21
	Salon Oak	RL13	AP08	-	-
	Savannah Oak	RL23	SM-RL23	-	-
	Serrano Oak	RL28	SM-RL28	-	-
	Spanish Cherry	RL05	AP05	-	-

			GLUEDOWN		
Wood	**Name**	**Plank**	**Herringbone**	**Basketweave**	**Random Plank**
	Spring Oak	RL01	AP01	SBW-RL01	-
	Storm Oak	RL12	AP07	SBW-RL12	-
	Summer Oak	RL02	-	-	-
	Summerhouse Ash	RL40	-	-	-
	Tolsford Ash	RL42	-	-	-
	Tweed Oak	RL37	-	-	-

		GLUEDOWN
Stone	**Name**	**Tile**
	Black Onyx	LM34
	Brenner Quartzite	LM47
	Brezza Ceppo	LM43
	Calacatta d'Oro	LM33
	Caliza Classico	LM39
	Canberra Slate	LM06
	Cambric Stone	LM46
	Champagne Travertino	LM38
	Corinthian Marble	LM31
	Corris Slate	LM22
	Doric Marble	LM32
	Ionic Marble	LM30
	Lago Quartzite	LM49
	Melbourne Slate	LM05
	Naturale Ceppo	LM45
	Pavimento Bianco	LM42
	Pavimento Crema	LM40
	Pavimento Grigio	LM41
	Pearl Onyx	LM35
	Rose Onyx	LM36
	Sabbia Ceppo	LM44
	Silk Travertino	LM37
	Verona Quartzite	LM48

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	5187 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874: Light industrial EN ISO 10874: Commercial EN ISO 10874: Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0118 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2020/VG/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/VG/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Van Gogh.

VAN GOGH WOOD

609.6mm x 609.6mm (24.0" x 24.0")



Cocoa Apres Oak **PAN-VGW145T**



Sable Apres Oak **PAN-VGW146T**



Honey Apres Oak **PAN-VGW147T**



Composition of each panel.

A classic panel for contemporary spaces

Our new Pavilion Panels are engineered for commercial environments, featuring a precision directional emboss and refined surface bevel that deliver a clean, high-end finish. Designed to elevate large-scale spaces, they combine the look of premium craftsmanship with the durability and consistency required for contemporary and traditional commercial interiors

Experiment with laying patterns to define feature areas, introduce subtle wayfinding or frame spaces with complementary planks.

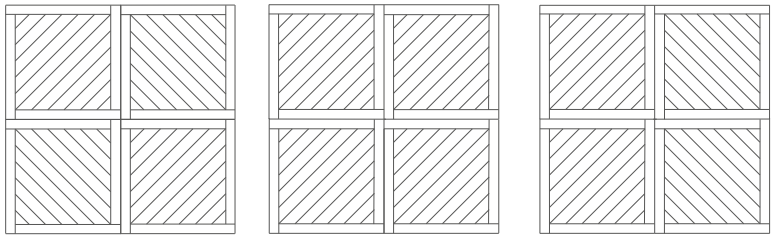

Available in Cocoa, Sable and Honey Apres Oak from the Van Gogh collection, each 3mm panel features a 0.55mm wear layer for high-traffic commercial environments.

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.716m² / 10 Pieces
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification



Cocoa Apres Oak **VGW145T | PAN-VGW145T**

457.2mm x 114.3mm (18.0" x 4.5")



Country Oak **SM-VGW81T**

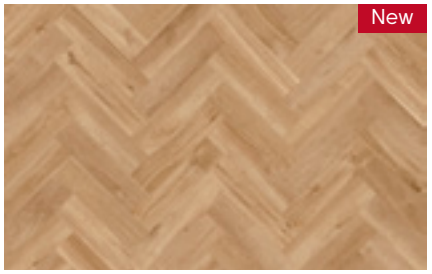

French Oak **SM-VGW85T**

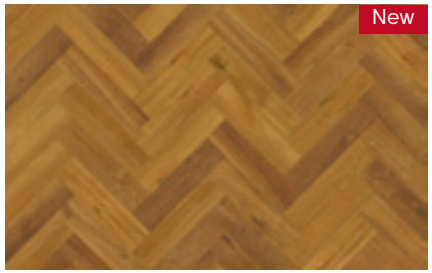

Classic Oak **SM-VGW86T**



Natural Prime Oak **SM-VGW115T**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 64 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification


Classic Oak **SM-VGW86T**

GLUEDOWN
VAN GOGH

457.2mm x 114.3mm (18.0" x 4.5")

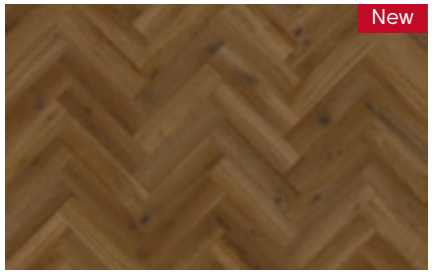

Cocoa Apres Oak **SM-VGW145T**

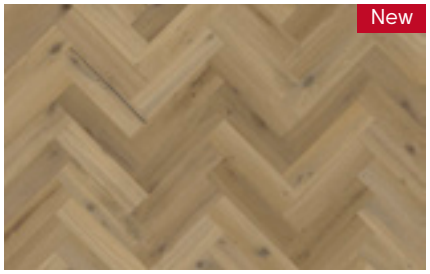

Sable Apres Oak **SM-VGW146T**

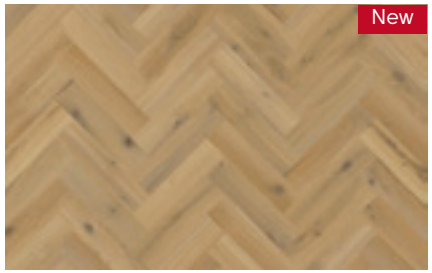

Honey Apres Oak **SM-VGW147T**



Indy Urban Elm **SM-VGW148T**

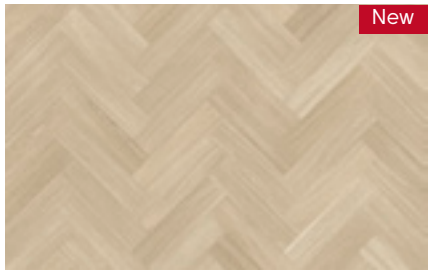

Linen Prime Oak **SM-VGW149T**

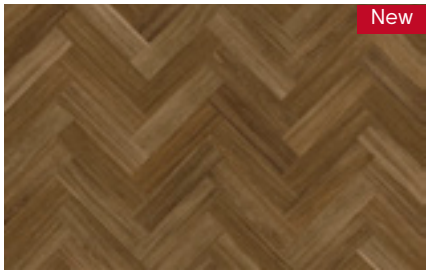

Truffle Prime Oak **SM-VGW150T**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 64 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification

457.2mm x 114.3mm (18.0" x 4.5")

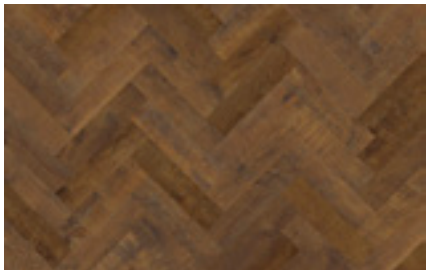
Antique French Oak **SM-VGW8110**

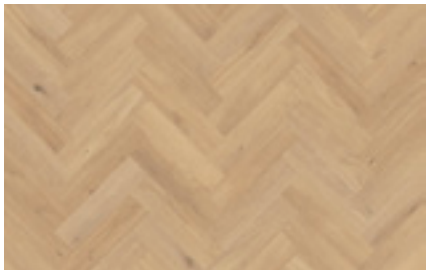
Canadian Nude Oak **SM-VGW8117**


Glenmore Oak **SM-VGW8237**


Croftmore Oak **SM-VGW8240**


Hayfield Oak **SM-VGW8241**



Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 64 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification

711.2mm x 177.8mm (28.0" x 7.0")


Grey Brushed Oak **SM-VGW120T**

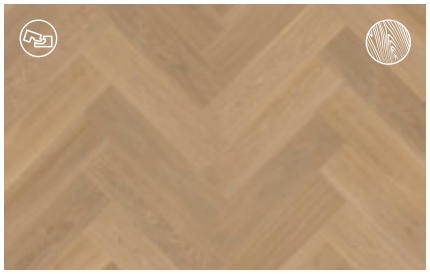
Warm Brushed Oak **SM-VGW121T**

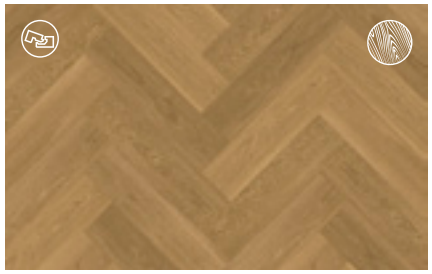
Golden Brushed Oak **SM-VGW122T**

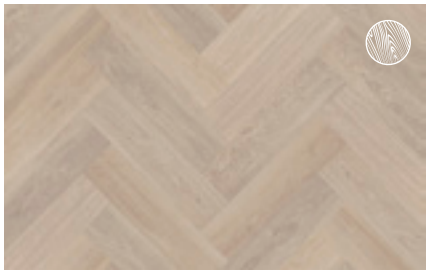
Neutral Brushed Oak **SM-VGW126T**


Texas White Ash **SM-VGW8105**

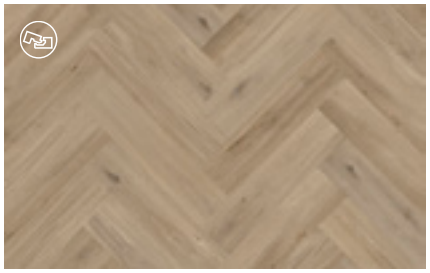
Canadian Urban Oak **SM-VGW8116**


Texas Grey Ash **SM-VGW8239**

Also available in rigid core.

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.288m² / 26 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification


Golden Brushed Oak **SM-VGW122T**

GLUEDOWN
VAN GOGH

1219.2mm x 177.8mm (48.0" x 7.0")


Auckland Oak **VGW52T**


Wellington Oak **VGW53T**

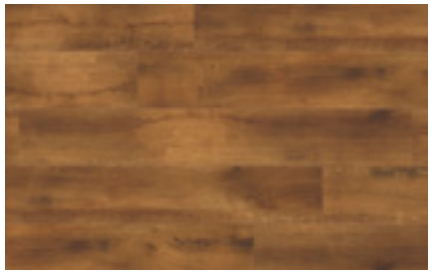
Smoked Oak **VGW70T**


White Washed Oak **VGW80T**


Country Oak **VGW81T**


Distressed Oak **VGW82T**


French Oak **VGW85T**


Classic Oak **VGW86T**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 15 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification

1219.2mm x 177.8mm (48.0" x 7.0")


Walnut **VGW87T**


Ebony **VGW89T**


Hessian Oak **VGW93T**


Honey Oak **VGW94T**


Cool Grey Oak **VGW113T**


Natural Prime Oak **VGW115T**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 15 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification

GLUEDOWN
VAN GOGH

1219.2mm x 177.8mm (48.0" x 7.0")



Cocoa Apres Oak **VGW145T**



Sable Apres Oak **VGW146T**



Honey Apres Oak **VGW147T**



Indy Urban Elm **VGW148T**



Linen Prime Oak **VGW149T**



Truffle Prime Oak **VGW150T**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 15 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification


Honey Apres Oak **VGW147T**

1422.4mm x 228.6mm (56.0" x 9.0")


Grey Brushed Oak **VGW120T**


Warm Brushed Oak **VGW121T**


Golden Brushed Oak **VGW122T**


Salvaged Barnwood **VGW123T**


Neutral Brushed Oak **VGW126T**


Baltic Washed Oak **VGW8101**

Also available in rigid core.

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 10 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification


Warm Ash **VGW8103**


Texas White Ash **VGW8105**


Antique French Oak **VGW8110**


Baltic Limed Oak **VGW8111**


Baltic Mistral Oak **VGW8112**


English Character Oak **VGW8115**


Canadian Urban Oak **VGW8116**


Canadian Nude Oak **VGW8117**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 10 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification

1422.4mm x 228.6mm (56.0" x 9.0")



Glenmore Oak **VGW8237**



Texas Grey Ash **VGW8239**



Croftmore Oak **VGW8240**



Hayfield Oak **VGW8241**



Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.252m² / 10 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 56 for full technical specification



Croftmore Oak **VGW8240** with **DS26** 5mm design strip

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	5187 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874: Light industrial EN ISO 10874: Commercial EN ISO 10874: Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0118 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2020/VG/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/VG/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Van Gogh.

VAN GOGH
STONE

457.2mm x 609.6mm (18.0" x 24.0")

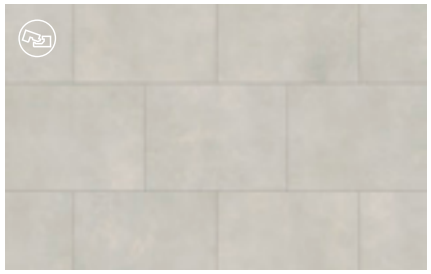

Frosted Stone **VGT2401***



Cotswold Stone **VGT2405**



Volcanic Black **VGT2406***



Pebble Grey **VGT2410***



Palazzo Marble **VGT2413**



Milanese Slate **VGT2420***

Also available in rigid core.

Thickness: 3.0 mm **Wear Layer:** 0.55mm **Bevelled edge:** Micro	**Box Quantity:** 3.345m² / 12 tiles **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 74 for full technical specification

* Displayed with design strips.

457.2mm x 609.6mm (18.0" x 24.0")



Roman Slate **VGT2422**



Venetian Slate **VGT2423**

Thickness: 3.0 mm **Wear Layer:** 0.55mm **Bevelled edge:** Micro	**Box Quantity:** 3.345m² / 12 tiles **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 74 for full technical specification

457.2mm x 914.4mm (18.0" x 36.0")



Tortora Breccia Marble **VGT3018***



Grigio Breccia Marble **VGT3019**

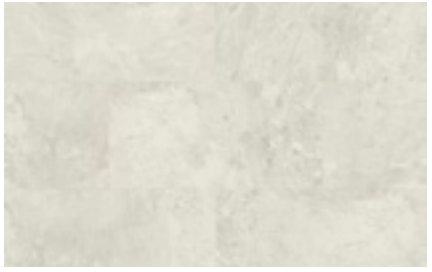

Bianco Breccia Marble **VGT3021**

Thickness: 3.0 mm **Wear Layer:** 0.55mm **Bevelled edge:** Micro	**Box Quantity:** 3.345m² / 8 tiles **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 74 for full technical specification

Van Gogh RIGID CORE GLUEDOWN

A quick reference guide for each design in our Van Gogh wood and stone range.

		GLUEDOWN			RIGID CORE	
Wood	**Name**	**Plank**	**Herringbone**	**Panel**	**Plank**	**Herringbone**
	Antique French Oak	VGW8110	SM-VGW8110	-	RKP8110	-
	Auckland Oak	VGW52T	-	-	-	-
	Baltic Limed Oak	VGW8111	-	-	RKP8111	-
	Baltic Mistral Oak	VGW8112	-	-	RKP8112	-
	Baltic Washed Oak	VGW8101	-	-	RKP8101	-
	Canadian Nude Oak	VGW8117	SM-VGW8117	-	RKP8117	-
	Canadian Urban Oak	VGW8116	SM-VGW8116	-	RKP8116	SM-VGW8116-RKP
	Classic Oak	VGW86T	SM-VGW86T	-	-	-
	Cocoa Apres Oak*	VGW145T*	SM-VGW145T*	PAN-VGW145T	-	-
	Cool Grey Oak	VGW113T	-	-	-	-
	Country Oak	VGW81T	SM-VGW81T	-	-	-
	Croftmore Oak	VGW8240	SM-VGW8240	-	-	-
	Distressed Oak	VGW82T	-	-	-	-
	Ebony	VGW89T	-	-	-	-
	English Character Oak	VGW8115	-	-	RKP8115	-
	French Oak	VGW85T	SM-VGW85T	-	-	-
	Glenmore Oak	VGW8237	SM-VGW8237	-	-	-
	Golden Brushed Oak	VGW122T	SM-VGW122T	-	VGW122T-RKP	SM-VGW122T-RKP
	Grey Brushed Oak	VGW120T	SM-VGW120T	-	-	-
	Hayfield Oak	VGW8241	SM-VGW8241	-	-	-
	Hessian Oak	VGW93T	-	-	-	-
	Honey Apres Oak	VGW147T*	SM-VGW147T*	PAN-VGW147T		
	Honey Oak	VGW94T	-	-	-	-
	Indy Urban Elm	VGW148T*	SM-VGW148T*	-	-	-
	Linen Prime Oak	VGW149T*	SM-VGW149T*	-	-	-
	Natural Prime Oak	VGW115T	SM-VGW115T	-	-	-
	Neutral Brushed Oak	VGW126T	SM-VGW126T	-	-	-
	Sable Apres Oak	VGW146T*	SM-VGW146T*	PAN-VGW146T	-	-
	Salvaged Barnwood	VGW123T	-	-	-	-
	Smoked Oak	VGW70T	-	-	-	-
	Texas Grey Ash	VGW8239	SM-VGW8239	-	-	-
	Texas White Ash	VGW8105	SM-VGW8105	-	RKP8105	SM-VGW8105-RKP
	Truffle Prime Oak	VGW150T*	SM-VGW150T*	-	-	-

		GLUEDOWN		RIGID CORE	
Wood	**Name**	**Plank**	**Herringbone**	**Plank**	**Herringbone**
	Walnut	VGW87T	-	-	-
	Warm Ash	VGW8103	-	-	-
	Warm Brushed Oak	VGW121T	SM-VGW121T	VGW121T-RKP	SM-VGW121T-RKP
	Wellington Oak	VGW53T	-	-	-
	White Washed Oak	VGW80T	-	-	-

		GLUEDOWN		RIGID CORE	
Stone	**Name**	**Tile**	**Herringbone**	**Tile**	**Herringbone**
	Bianco Breccia Marble	VGT3021	-	-	-
	Bronze Castello Marble	VGT2416	-	-	-
	Cotswold Stone	VGT2405	-	RKT2405	-
	Frosted Stone	VGT2401	-	RKT2401	-
	Grigio Breccia Marble	VGT3019	-	-	-
	Milanese Slate	VGT2420	-	-	-
	Palazzo Marble	VGT2413	-	-	-
	Pebble Grey	VGT2410	-	-	-
	Roman Slate	VGT2422	-	-	-
	Tortora Breccia Marble	VGT3018	-	-	-
	Venetian Slate	VGT2423	-	-	-
	Volcanic Black	VGT2406	-	RKT2406	-

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	4270 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Light industrial EN ISO 10874- Commercial EN ISO 10874- Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0097 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130 EN 16165 Annex C/BS7976	DS R10 > 36 (Slider 96)
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Gold Certified Type III EPD Manufactured in certified facilities
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2020/OPEnhance/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/OPEnhance/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Opus.

OPUS WOOD

EN16165 Pendulum Test 36+ (Wet) Slip Resistance

Taking inspiration from authentic materials such as reclaimed and prime oak, marble, dolomite, and terrazzo, Opus blends timeless aesthetics with lasting durability. The collection features a wide variety of stone and wood designs, including refined herringbone formats, offering versatility across different interior styles. Each floor is engineered with an enhanced slip-resistant finish achieving a 36+ PTV (pendulum test value) rating for reliable performance over time, making it a practical and stylish choice for both residential settings and high-traffic, safety-critical environments like kitchens and hotel spaces.

dsdc Dementia Services Development Centre

We've partnered with the Dementia Services Development Centre (DSDC) to independently review our Opus collection. As a result, 19 designs have been accredited for meeting recognised dementia-friendly design principles.

● - Indicates accredited dementia-friendly designs.

1219.2mm x 228.6mm (48.0" x 9.0")



Argen ● **WP414-SR**



Grano ● **WP435-SR**



Ignea ● **WP436-SR**



Niveus ● **WP437-SR**



Magna ● **WP438-SR**



Columba ● **WP439-SR**

● - DSDC accredited product.

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 12 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 80 for full technical specification



Niveus **WP437-SR** | **SM-WP437-SR**

GLUEDOWN
OPUS

1219.2mm x 228.6mm (48.0" x 9.0")



Avena ● **WP440-SR**



Metsu Oak ● **WP441-SR**



Leyster Oak **WP442-SR**



Vermeer Oak **WP443-SR**



Barolo Oak ● **WP444-SR**



Geneva Oak ● **WP445-SR**

● - DSDC accredited product.

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 12 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 80 for full technical specification



Geneva Oak **WP445-SR**

457.2mm x 76.2mm (18.0" x 3.0")

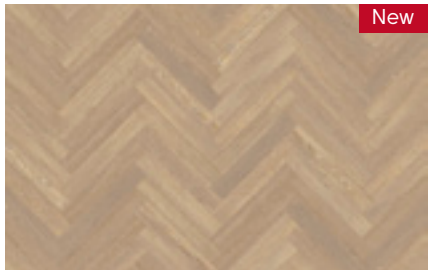

Niveus ● **SM-WP437-SR**

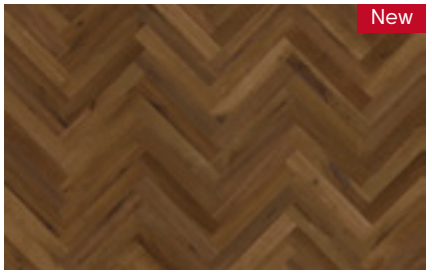

Metsu Oak ● **SM-WP441-SR**



Leyster Oak **SM-WP442-SR**

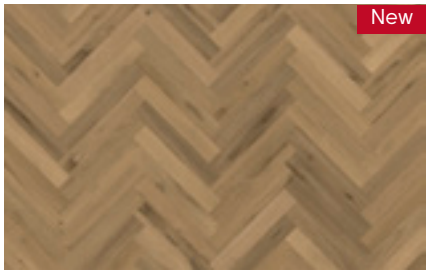

Vermeer Oak **SM-WP443-SR**



Geneva Oak ● **SM-WP445-SR**

dsdc
Dementia Design Accredited Product

● - DSDC accredited product.

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.

BNB165 pendulum Test (Wet) 36+ Slip Resistance

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 96 Planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 80 for full technical specification



Leyster Oak **SM-WP442-SR** | Valencia **SP813-SR**

GLUEDOWN
OPUS

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	4270 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Light industrial EN ISO 10874- Commercial EN ISO 10874- Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0097 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130 EN 16165 Annex C/BS7976	DS R10 > 36 (Slider 96)
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration ISO 14001 / ISO 9001	Gold Certified Type III EPD Manufactured in certified facilities
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2020/OPEnhance/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/OPEnhance/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Opus.

OPUS
STONE

EN16165 Pendulum Test 36+ (Wet) Slip Resistance

Taking inspiration from authentic materials such as reclaimed and prime oak, marble, dolomite, and terrazzo, Opus blends timeless aesthetics with lasting durability. The collection features a wide variety of stone and wood designs, including refined herringbone formats, offering versatility across different interior styles. Each floor is engineered with an enhanced slip-resistant finish achieving a 36+ PTV (pendulum test value) rating for reliable performance over time, making it a practical and stylish choice for both residential settings and high-traffic, safety-critical environments like kitchens and hotel spaces.

dsdc Dementia Services Development Centre

We've partnered with the Dementia Services Development Centre (DSDC) to independently review our Opus collection. As a result, 19 designs have been accredited for meeting recognised dementia-friendly design principles.

● - Indicates accredited dementia-friendly designs.

457.2mm x 457.2mm (18.0" x 18.0")



Luna ● **SP111-SR***



Nero ● **SP115-SR**

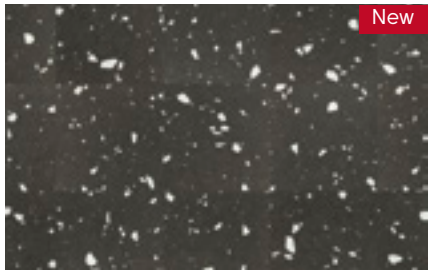

Dolce **SP119-SR**

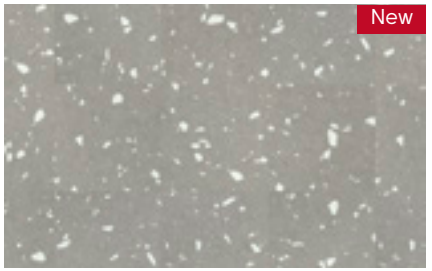

Pleta **SP120-SR**

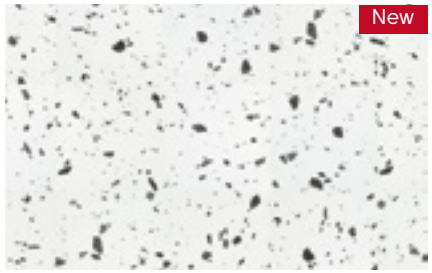

Dalmata **SP121-SR**

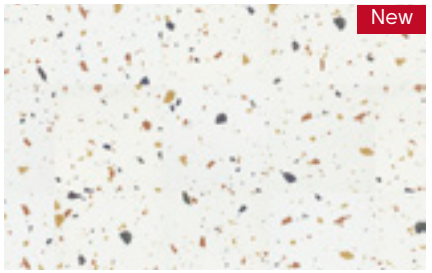

Salute Blanco **SP122-SR**

● - DSDC accredited product.

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.

Thickness: 2.5mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 16 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 88 for full technical specification

* Displayed with design strips.

457.2mm x 457.2mm (18.0" x 18.0")

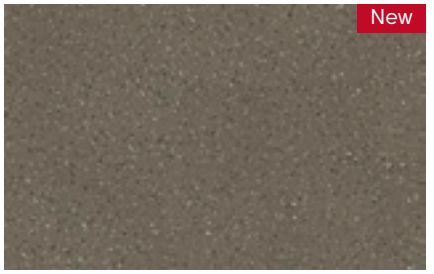

Oscuro Terrazzo ● **SP123-SR**



Platino Terrazzo ● **SP124-SR**

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 16 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 88 for full technical specification

457.2mm x 609.6mm (18.0" x 24.0")



Mico ● **SP211-SR***



Urbus ● **SP213-SR***



Fumo ● **SP216-SR***

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 12 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 88 for full technical specification

609.6mm x 609.6mm (24.0" x 24.0")

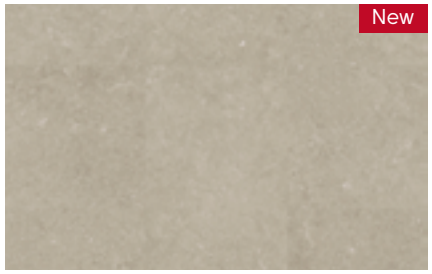
New

Pamplona ● **SP812-SR**


New

Valencia ● **SP813-SR**


New

Sillano Marble **SP816-SR**

● - DSDC accredited product.

Every product features an enhanced textured finish, delivering slip resistance of 36+ as verified by pendulum wet testing. A sophisticated palette of contemporary tones is paired with a durable 0.55 mm wear layer and backed by a 15-year commercial warranty, ensuring lasting performance and style.

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.716m² / 10 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 88 for full technical specification


Sillano Marble **SP816-SR**



A quick reference guide for each design in our Opus abstract, wood and stone ranges.

		GLUEDOWN	
Wood	**Name**	**Plank**	**Herringbone**
	Argen ●	WP414-SR	-
	Avena ●	WP440-SR	-
	Barolo Oak ●	WP444-SR	-
	Columba ●	WP439-SR	-
	Geneva Oak ●	WP445-SR	SM-WP445-SR
	Grano ●	WP435-SR	-
	Ignea ●	WP436-SR	-
	Magna ●	WP438-SR	-
	Leyster Oak	WP442-SR	SM-WP442-SR
	Metsu Oak ●	WP441-SR	SM-WP441-SR
	Niveus ●	WP437-SR	SM-WP437-SR
	Vermeer Oak	WP443-SR	SM-WP443-SR

		GLUEDOWN	
Stone	**Name**	**Tile**	**Herringbone**
	Dalmata	SP121-SR	-
	Dolce	SP119-SR	-
	Fumo ●	SP216-SR	-
	Luna ●	SP111-SR	-
	Mico ●	SP211-SR	-
	Nero ●	SP115-SR	-
	Oscuro Terrazzo ●	SP123-SR	-
	Pamplona ●	SP812-SR	-
	Platino Terrazzo ●	SP124-SR	-
	Pleta	SP120-SR	-
	Salute Blanco	SP122-SR	-
	Sillano Marble	SP816-SR	-
	Urbus ●	SP213-SR	-
	Valencia ●	SP813-SR	-

dsdc Dementia Design Accredited Product

● - DSDC accredited product.



Valencia **SP813-SR**

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	10 years Lifetime warranty
Mass per unit area	EN ISO 23997	3605 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Commercial EN ISO 10874- Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL_W= 1 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	EN ISO 4918	Pass
Thermal resistance	ISO 8302	0.0084 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2011/RU/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/RU/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Knight Tile.

KNIGHT TILE
WOOD

1219.2mm x 228.6mm (48.0" x 9.0")



Rose Washed Oak **CH-KP95**

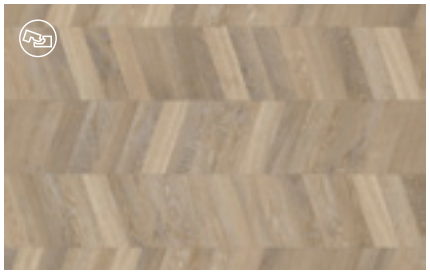

Lime Washed Oak **CH-KP99**

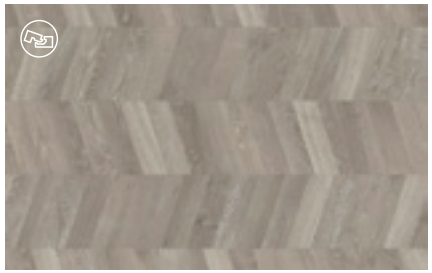

Grey Washed Oak **CH-KP156**

Also available in rigid core.

Thickness: 2.0 mm	**Box Quantity:** 3.345m² / 12 planks	See page 96 for full technical specification
Wear Layer: 0.3 mm	**Commercial Warranty:** 10 years	
Bevelled edge: None	**Domestic Warranty:** Lifetime	



Lime Washed Oak **CH-KP99**

GLUEDOWN
KNIGHT TILE

914.4mm x 152.4mm (36.0" x 6.0")


Pale Limed Oak **KP94**


Rose Washed Oak **KP95**


Mid Limed Oak **KP96**


Classic Limed Oak **KP97**


Aged Oak **KP98**


Lime Washed Oak **KP99**

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification

914.4mm x 152.4mm (36.0" x 6.0")


Mid Worn Oak **KP103**


Grey Limed Oak **KP138**


Washed Character Oak **KP144**

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification

GLUEDOWN
KNIGHT TILE

914.4mm x 152.4mm (36.0" x 6.0")



Natural Character Oak **KP145**



Traditional Character Oak **KP146**



Coastline Oak **KP147**



Quayside Oak **KP148**



Natural Studio Oak **KP151**



Grey Studio Oak **KP152**

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification



Quayside Oak **KP148**

GLUEDOWN
KNIGHT TILE

914.4mm x 152.4mm (36.0" x 6.0")



Nordic Limed Oak **KP153**



Dutch Limed Oak **KP154**



Honey Limed Oak **KP155**



Norfolk Acacia **KP159**



Wells Acacia **KP160**



Duxbury Acacia **KP161**

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification

914.4mm x 152.4mm (36.0" x 6.0")



Russet Character Oak **KP163**



Nutmeg Limed Oak **KP164**



Cocoa Limed Oak **KP165**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification

GLUEDOWN
KNIGHT TILE

457.2mm x 76.2mm (18.0" x 3.0")


Pale Limed Oak **SM-KP94**

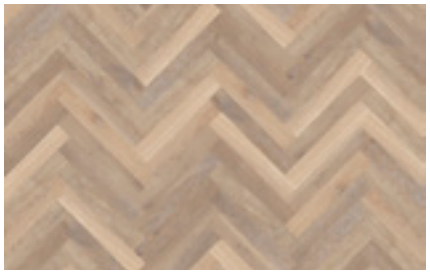
Rose Washed Oak **SM-KP95**

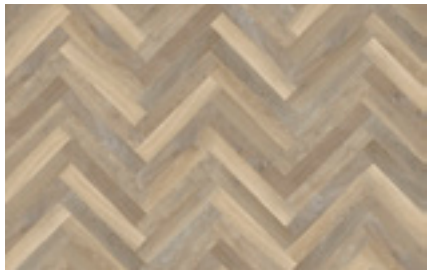
Lime Washed Oak **SM-KP99**

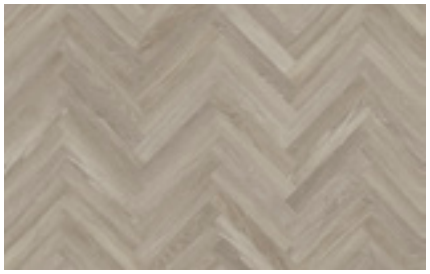
Grey Limed Oak **SM-KP138**


Washed Character Oak **SM-KP144**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 96 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification


Rose Washed Oak **SM-KP95**

GLUEDOWN
KNIGHT TILE

457.2mm x 76.2mm (18.0" x 3.0")


Traditional Character Oak **SM-KP146**


Dutch Limed Oak **SM-KP154**

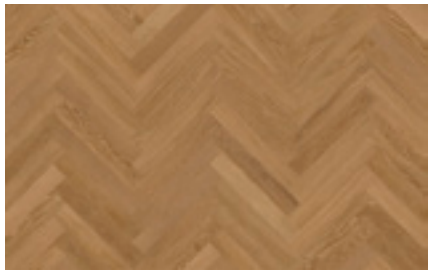
Honey Limed Oak **SM-KP155**


Wells Acacia **SM-KP160**

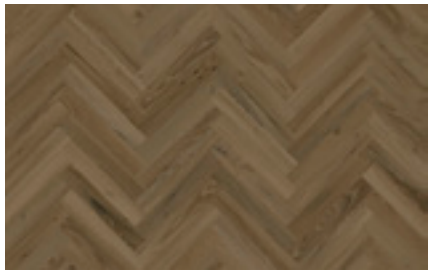
Duxbury Acacia **SM-KP161**

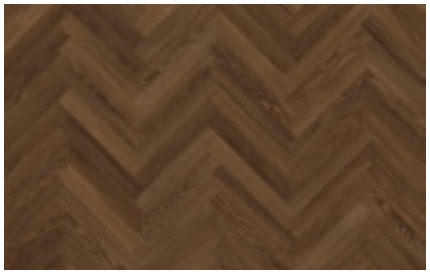
Nutmeg Limed Oak **SM-KP164**

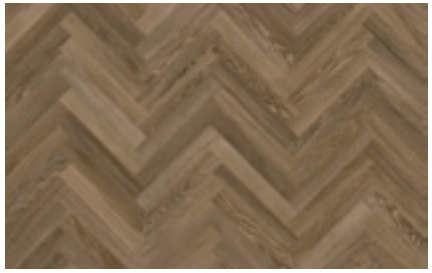
Cocoa Limed Oak **SM-KP165**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 96 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 96 for full technical specification


Cocoa Limed Oak **SM-KP165**

GLUEDOWN
KNIGHT TILE

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	10 years Lifetime warranty
Mass per unit area	EN ISO 23997	3605 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Commercial EN ISO 10874- Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	ΔL_W= 1 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	EN ISO 4918	Pass
Thermal resistance	ISO 8302	0.0084 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2011/RU/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/RU/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Knight Tile.

KNIGHT TILE
STONE & ABSTRACT

304.8mm x 304.8mm (12.0" x 12.0")

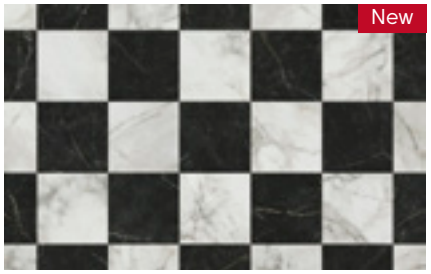

Empire Marble **ST34**

Thickness: 2.0 mm **Wear Layer:** 0.3 mm **Bevelled edge:** None	**Box Quantity:** 3.345m² / 36 tiles **Commercial Warranty:** 10 years **Domestic Warranty:** Lifetime	See page 110 for full technical specification

ABSTRACT

230.0mm x 230.0mm (9.06" x 9.06")



Curio Terracotta **ST35**



Curio Sage **ST36**



Curio Navy **ST37**



Curio Graphite **ST38**

Thickness: 2.0 mm **Wear Layer:** 0.3 mm **Bevelled edge:** None	**Box Quantity:** 2.222m² / 42 tiles **Commercial Warranty:** 10 years **Domestic Warranty:** Lifetime	See page 110 for full technical specification

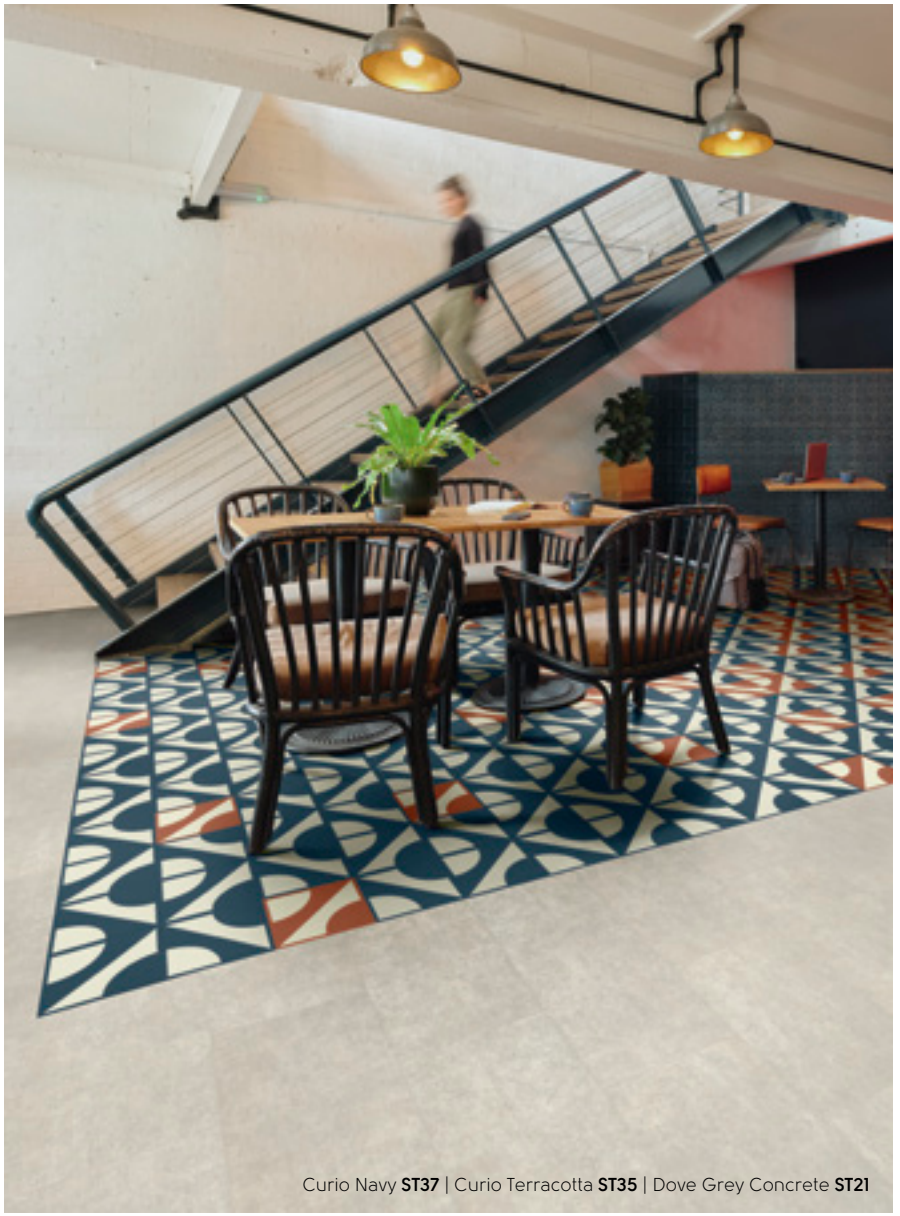

Curio Navy **ST37** | Curio Terracotta **ST35** | Dove Grey Concrete **ST21**

Inspired by graphic design, architectural geometry, and the principles of symmetry and repetition, the design is intentionally simple yet visually expressive. Its modular format invites creative tessellation, allowing each tile to be rotated and repeated to form patterns that feel either subtle and rhythmic or bold and dynamic.

304.8mm x 457.2mm (12.0" x 18.0")


Bath Stone **ST12***


Portland Stone **ST13***


Cumbrian Stone **ST14***

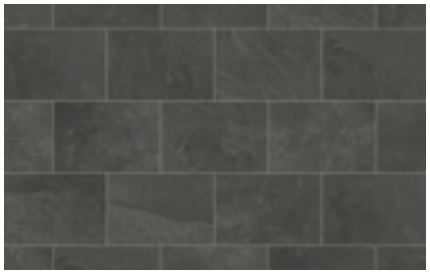
Black Riven Slate **ST15***


Grey Riven Slate **ST16**


Honed Oyster Slate **ST17***

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 tiles
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 110 for full technical specification

* Displayed with design strips.

304.8mm x 457.2mm (12.0" x 18.0")

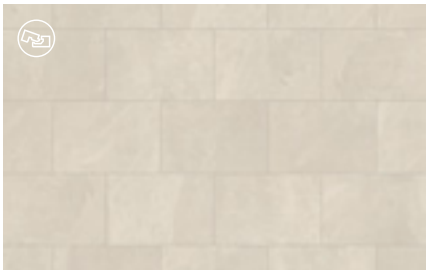
Ivory Riven Slate **ST18***


Honed Pebble Slate **ST20***


Dove Grey Concrete **ST21***


Smoked Concrete **ST22***

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 tiles
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 110 for full technical specification

* Displayed with design strips.

304.8mm x 457.2mm (12.0" x 18.0")

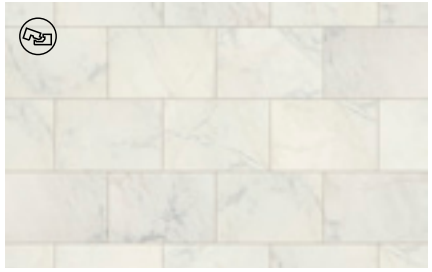

Frosted Marble **ST26***



Natural Stone **ST29***

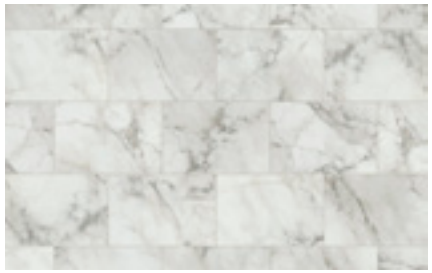

River Marble **ST31***



Lunar Limestone **ST32**

Natural Limestone **ST33***

Also available in rigid core.

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Bevelled edge: None

Box Quantity: 3.345m² / 24 tiles
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 110 for full technical specification

* Displayed with design strips.



Lunar Limestone **ST32** | Natural Limestone **ST33**

GLUEDOWN
KNIGHT TILE



A quick reference guide for each design in our Knight Tile wood and stone, and Knight Tile Quiet.

		GLUEDOWN		RIGID CORE
Wood	**Name**	**Plank**	**Herringbone**	**Plank**
	Aged Oak	KP98	-	-
	Classic Limed Oak	KP97	-	-
	Coastline Oak	KP147	-	-
	Cocoa Limed Oak	KP165	SM-KP165	-
	Dutch Limed Oak	KP154	SM-KP154	SCB-KP154-6
	Duxbury Acacia	KP161	SM-KP161	-
	Grey Limed Oak	KP138	SM-KP138	SCB-KP138-6
	Grey Studio Oak	KP152	-	-
	Grey Washed Oak	CH-KP156	-	SCB-CH-KP156
	Honey Limed Oak	KP155	SM-KP155	-
	Lime Washed Oak	KP99 CH-KP99	SM-KP99	SCB-KP99-6 SCB-CH-KP99
	Mid Limed Oak	KP96	-	-
	Mid Worn Oak	KP103	-	-
	Natural Character Oak	KP145	-	-
	Natural Studio Oak	KP151	-	-
	Nordic Limed Oak	KP153	-	-
	Norfolk Acacia	KP159	-	-
	Nutmeg Limed Oak	KP164	SM-KP164	-
	Pale Limed Oak	KP94	SM-KP94	SCB-KP94-6
	Quayside Oak	KP148	-	-
	Rose Washed Oak	KP95 CH-KP95	SM-KP95	SCB-KP95-6 SCB-CH-KP95
	Russet Character Oak	KP163	-	-
	Traditional Character Oak	KP146	SM-KP146	SCB-KP146-6
	Washed Character Oak	KP144	SM-KP144	SCB-KP144-6
	Wells Acacia	KP160	SM-KP160	-

		GLUEDOWN		RIGID CORE
Stone	**Name**	**Tile**	**Herringbone**	**Tile**
	Bath Stone	ST12	-	-
	Black Riven Slate	ST15	-	-
	Cumbrian Stone	ST14	-	SCB-ST14-18
	Curio Graphite	ST38	-	-
	Curio Navy	ST37	-	-
	Curio Sage	ST36	-	-
	Curio Terracotta	ST35	-	-
	Dove Grey Concrete	ST21	-	SCB-ST21-18
	Empire Marble	ST34	-	-
	Frosted Marble	ST26	-	SCB-ST26-18
	Grey Riven Slate	ST16	-	SCB-ST16-18
	Honed Oyster Slate	ST17	-	-
	Honed Pebble Slate	ST20	-	SCB-ST20-18
	Ivory Riven Slate	ST18	-	SCB-ST18-18
	Lunar Limestone	ST32	-	-
	Natural Limestone	ST33	-	-
	Natural Stone	ST29	-	-
	Portland Stone	ST13	-	-
	River Marble	ST31	-	-
	Smoked Concrete	ST22	-	-

		GLUEDOWN		RIGID CORE
Wood	**Name**	**Plank**	**Herringbone**	**Plank**
	Pale Limed Oak	KP94-QT	-	-
	Lime Washed Oak	KP99-QT	-	-
	Grey Limed Oak	KP138-QT	-	-
	Dutch Limed Oak	KP154-QT	-	-
	Russet Character Oak	KP163-QT	-	-

	Standard	Result
Acoustic backing layer thickness	EN ISO 24340	1.0 mm
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	10 years Lifetime warranty
Bevelled edge		Micro
Mass per unit area	EN ISO 23997	3700 g/m²
Standards	EN ISO 11638	Pass
Classification	EN ISO 10874- Commercial EN ISO 10874- Domestic	31: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 11638	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.25%)
Dimensional stability / Curling	EN ISO 23999	Pass
Acoustic impact noise reduction	BS EN ISO 10140-3:2021	ΔL_W= 18 dB
Indentation – residual	EN ISO 24343-1	Pass (≤0.35 mm)
Indentation after 15s (walking comfort)	EN ISO 24343-1	Pass
Castor chair continuous use	EN ISO 4918	Pass
Furniture chair leg (Type 2 and 3)	EN ISO 16581	Pass
Thermal resistance	ISO 8302	0.030 m²K/W
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive		Refer to installation instructions
Environmental	Indoor Air Comfort ISO 14001 / ISO 9001	Gold Manufactured in certified facilities
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2025/RUQ/EN/02
CA / DOP	BS EN 14041	DOP 2025/UKCA/RUQ/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Knight Tile Quiet.

KNIGHT TILE QUIET



Every decibel counts, and the Knight Tile Quiet range delivers up to 18dB impact sound reduction, exceeding building regulations while providing reliable compliance and Karndean's trusted performance for design-focused, cost-conscious shared spaces.

Knight Tile range is available in Knight Tile Quiet, subject to minimum order quantity and with a lead time. Contact your local Karndean Business Manager.

KNIGHT TILE **QUIET**

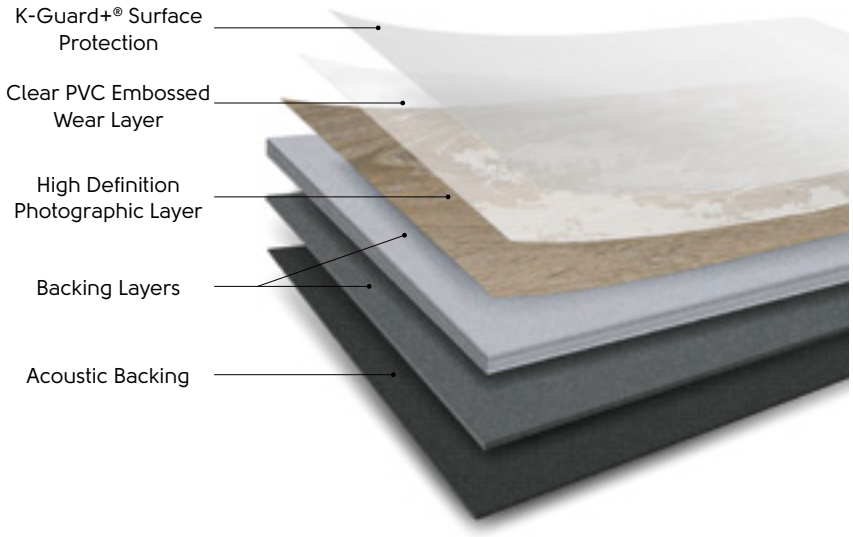

Knight Tile Quiet benefits

Proven acoustic performance

Independently tested to achieve up to 18dB reduction in impact sound.

Faster installation

Reduces the need for costly underlays or secondary acoustic treatments.

Meets requirements

Proven acoustic performance that exceeds regulations.

Design freedom

Helps developers balance compliance, wellbeing, and design appeal.

914.4mm x 152.4mm (36.0" x 6.0")


Pale Limed Oak **KP94-QT**


Lime Washed Oak **KP99-QT**


Grey Limed Oak **KP138-QT**


Dutch Limed Oak **KP154-QT**


Russet Character Oak **KP163-QT**

Thickness: 3.0 mm
Wear Layer: 0.3 mm
Bevelled edge: Micro

Box Quantity: 3.345m² / 24 planks
Commercial Warranty: 10 years
Domestic Warranty: Lifetime

See page 120 for full technical specification

Please refer to page 217 for installation guidelines.

GLUEDOWN
KNIGHT TILE QUIET

General technical specification

The Heritage Collection features products cut from our Opus and solid colour ranges. For full details, please refer to the technical data sheets for Opus (page 88) and solid colours (page 153).

	Standard	Result
Size	EN ISO 24342	Various
Thickness	EN ISO 24346	2.5 mm
Wear layer	EN ISO 24340	0.55 mm
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Slip resistance**	EN 16165 Annex B/DIN 51130 EN 13893	See individual technical data sheet for details
Recycling		Suitable
Phthalate free		Yes

Solid colours

Product code	LRV
V11	41
V12	21
V13	24
V14	52
V15	36
V16	13
V17	29
V18	12
V19	24
V20	71

Opus

Product code	LRV
SP111	66
SP115	8

* Subject to terms.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Heritage Collection.

HERITAGE COLLECTION ABSTRACT

Montpellier



Montpellier **MONT-01**
Lace V20, Nero SP115*



Montpellier **MONT-02**
Nero SP115*, Lace V20



Montpellier **MONT-03**
Dove Grey V19, Lace V20



Montpellier **MONT-04**
Taupe V17, Lace V20

One shape repeat:

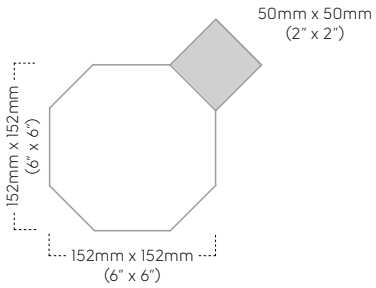

See page 132 for Heritage Collection design components

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevel: Standard

Box Quantity: 1.161m² / 25 tiles & 25 key squares
Commercial Warranty: 15 years

Domestic Warranty: Lifetime
See page 124 for general technical specification



Montpellier **MONT-05**
Blush V14, Lace V20



Montpellier **MONT-06**
Azure V12, Lace V20



Montpellier **MONT-07**
Dove Grey V19, Nero SP115*, Lace V20



Montpellier **MONT-08**
Terracotta V18, Nero SP115*, Lace V20

See page 132 for Heritage Collection design components

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevel: Standard

Box Quantity: 1.161m² / 25 tiles & 25 key squares
Commercial Warranty: 15 years

Domestic Warranty: Lifetime
See page 124 for general technical specification

GLUEDOWN
HERITAGE COLLECTION

Clifton



Clifton **CLIF-01**
Nero SP115*, Lace V20



Clifton **CLIF-02**
Dove Grey V19, Lace V20



Clifton **CLIF-03**
Taupe V17, Lace V20



Clifton **CLIF-04**
Azure V12, Dove Grey V19, Lace V20, Nero SP115*

One shape repeat:

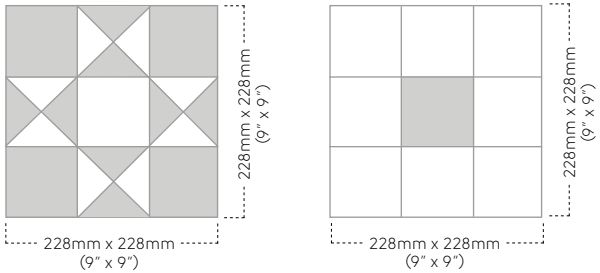

See page 132 for Heritage Collection design components

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevel: Standard

Box Quantity: 1.672m² / 32 pieces
16 of each design
Commercial Warranty: 15 years

Domestic Warranty: Lifetime
See page 124 for general technical specification



Clifton **CLIF-04**

GLUEDOWN
HERITAGE COLLECTION

Lansdown



Lansdown **LANS-01**
Lace V20, Nero SP115*



Lansdown **LANS-02**
Lace V20, Dove Grey V19



Lansdown **LANS-03**
Lace V20, Nero SP115*, Azure V12



Lansdown **LANS-04**
Lace V20, Nero SP115*, Laurel V13

One shape repeat:



See page 132 for Heritage Collection design components

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevel: Standard

Box Quantity: 1.486m² / 16 pieces
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 124 for general technical specification

Mayfair

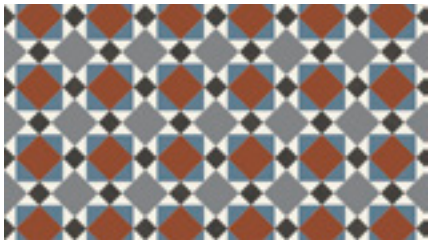

Mayfair **MAYF-01**
Terracotta V18, Azure V12, Dove Grey V19,
Lace V20, Nero SP115*



Mayfair **MAYF-02**
Gold V15, Crimson V16, Azure V12,
Lace V20, Nero SP115*

One shape repeat:



See page 132 for Heritage Collection design components

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Bevel: Standard

Box Quantity: 1.486m² / 16 pieces
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 124 for general technical specification

Design components

Please refer to the compatibility table on the next page for information regarding the design components and laying direction.

Item	Size	
Brick Border	36" x 3" (915mm x 76mm)	
Brick Corner	3" x 3" (76mm x 76mm)	
4" Diamond Border	36" x 4" (915mm x 102mm)	
4" Diamond Corner	4" L Shape (102mm)	
4.24" Diamond Border	33.94" x 4.24" (862mm x 107mm)	
4.24" Diamond Corner	4.24" L Shape (107mm)	
6" Infill	36" x 6" (915mm x 152mm)	
8.49" Infill	33.94" x 8.49" (862mm x 215mm)	
8" Infill Corner	8" Infill Square (203mm x 203mm)	
10.6" Infill Corner	10.6" Infill Square (269mm x 269mm)	

Compatibility

		Borders and corners			Infill	
	Laying direction	4" Diamond	4.24" Diamond	3" Brick	6"	8.49"
Montpellier	Straight	●		●	●	
Lansdown	Straight			●	●	
	45°			●	●	
Clifton	Straight			●	●	
	45°		●	●		●
Mayfair	45°		●	●		●

Our Solid colours can be used to create your bespoke Heritage Collection floor.
See page 152 for more information.


Mayfair **MAYF-02**

For further information on creating a bespoke Heritage Collection floor, please refer to the Heritage Collection order form.

Each floor will be custom cut to order. Delivery will be detailed on your order confirmation email and will be advised per order. Due to the custom nature of the Heritage Collection, we will not be able to accept returns. Installation guidelines for your Heritage Collection floor will be sent with your email order confirmation. Please also see installation guides on page 217.

When ordering brick corners, infill corners are not required.

Heritage Collection GLUEDOWN

A quick reference guide for each design in our Heritage Collection.

		GLUEDOWN
Abstract	**Name**	**Tile**
	Montpellier	MONT-01
	Montpellier	MONT-02
	Montpellier	MONT-03
	Montpellier	MONT-04
	Montpellier	MONT-05
	Montpellier	MONT-06
	Montpellier	MONT-07
	Montpellier	MONT-08
	Clifton	CLIF-01
	Clifton	CLIF-02
	Clifton	CLIF-03
	Clifton	CLIF-04
	Lansdown	LANS-01
	Lansdown	LANS-02
	Lansdown	LANS-03
	Lansdown	LANS-04
	Mayfair	MAYF-01
	Mayfair	MAYF-02
	Baby Blue	V11
	Azure	V12
	Laurel	V13
	Blush	V14
	Gold	V15
	Crimson	V16
	Taupe	V17
	Terracotta	V18
	Dove Grey	V19
	Lace	V20
	Luna	SP111
	Nero	SP115



Montpellier **MONT-06**

GLUEDOWN
HERITAGE COLLECTION

Code	Product name	Cut from product/s	Technical data
KAL01	Pyramid	VGW80T, VGW83T, VGW89T	Van Gogh (page 56)
KAL02	Cubix	ST8, ST13, ST14	Knight Tile (page 100)
KAL03	Cubix	LM06, LM12, LM16	Art Select (page 74)
KAL04	Pennon	LM09, LM12, LM16	Art Select (page 74)
KAL05	Half Pennon	VGW83T, VGW80T	Van Gogh (page 56)
KAL06	Apex	WP418	Opus (page 80)
KAL07	Apex	KP95	Knight Tile (page 96)
KAL08	Hexa	LM12	Art Select (page 74)
KAL09	Hexa	ST8, ST13	Knight Tile (page 110)
KAL10	Tripoint	KP103, KP104, KP105	Knight Tile (page 96)
KAL11	Woven	SP111, SP211, SP213	Opus (page 88)
KAL12	Woven	WP311, WP318	Opus (page 80)
KAL13	Cubix	KP97, KP103, KP105	Knight Tile (page 96)
KAL14	Apex	RP97, RP98, RP99	Art Select (page 32)
SP219	Casablanca	-	Opus (page 88)
SP220	Marrakesh	-	Opus (page 88)

KALEIDOSCOPE
ABSTRACT



Pyramid **KAL01**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Box Quantity: 2.810m² / 72 pieces
See page 136 for more information.



Cubix **KAL02**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Box Quantity: 2.920m² / 150 pieces
See page 136 for more information.



Cubix **KAL03**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Box Quantity: 2.460m² / 126 pieces
See page 136 for more information.



Pennon **KAL04**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Box Quantity: 2.100m² / 36 pieces
See page 136 for more information.



Half Pennon **KAL05**

Thickness: 3.0 mm
Wear Layer: 0.55 mm
Box Quantity: 2.100m² / 72 pieces
See page 136 for more information.



Apex **KAL06**

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Box Quantity: 2.800m² / 36 pieces
See page 136 for more information.

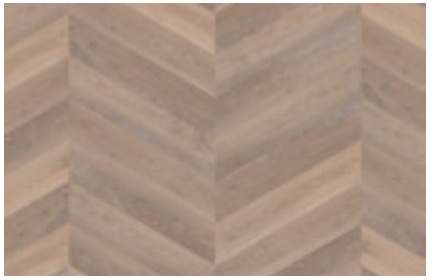

Apex **KAL07**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Box Quantity: 2.800m² / 36 pieces
See page 136 for more information.

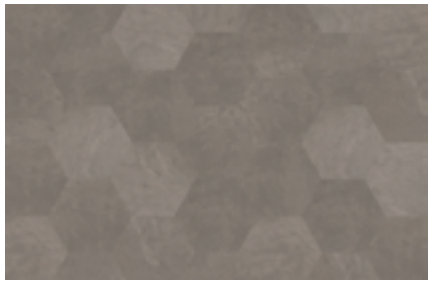

Hexa **KAL08**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Box Quantity: 2.100m² / 36 pieces
See page 136 for more information.



Hexa **KAL09**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Box Quantity: 2.100m² / 36 pieces
See page 136 for more information.



Tripoint **KAL10**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Box Quantity: 2.970m² / 72 pieces
See page 136 for more information.



Woven **KAL11**

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Box Quantity: 2.510m² / 32 pieces
See page 136 for more information.



Woven **KAL12**

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Box Quantity: 2.510m² / 32 pieces
See page 136 for more information.



Cubix **KAL13**

Thickness: 2.0 mm
Wear Layer: 0.3 mm
Box Quantity: 2.920m² / 150 pieces
See page 136 for more information.



Apex **KAL14**

Thickness: 3.0 mm
Wear Layer: 0.7 mm
Box Quantity: 2.800m² / 36 pieces
See page 136 for more information.

457mm x 610mm (18" x 24")



Casablanca **SP219**



Marrakesh **SP220**

Thickness: 2.5 mm
Wear Layer: 0.55 mm
Box Quantity: 3.345m² / 12 tiles
See page 136 for more information.



Apex and bespoke pattern using Hexa, Pyramid and Pennon
KP94 | **KP103** | **LM05** | **LM06**

Pre-cut designs

Our pre-cut kaleidoscope designs (see page 138- 140) are available with a shorter leadtimes.

Apex



Hexa



Pennon



Tripoint



Cubix



Half Pennon



Pyramid



Woven



Customised designs

Alternatively you can customise your own kaleidoscope design from selected Karndean products (see page 144). These patterns come at a larger scale, suitable for commercial spaces.

Apex

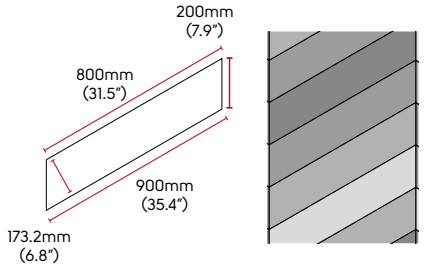

Hexa

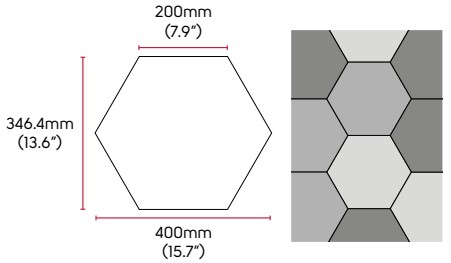

Pennon

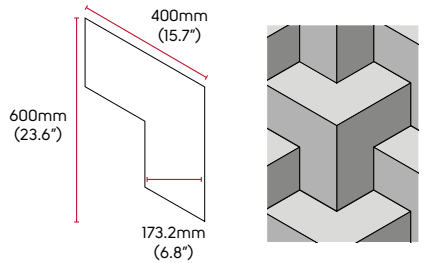

Tripoint

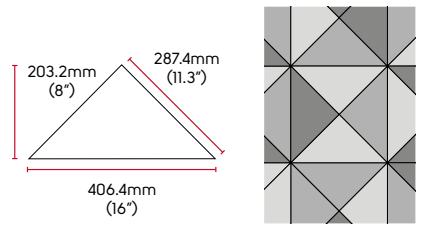

Cubix

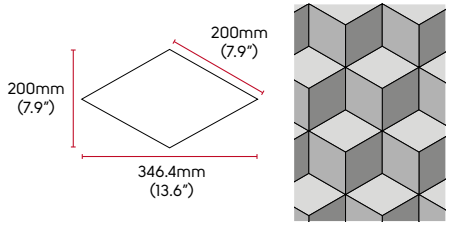

Half Pennon

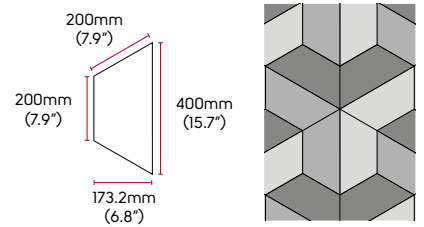

Pyramid

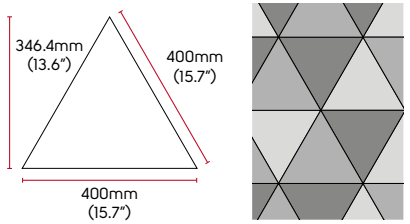

Woven

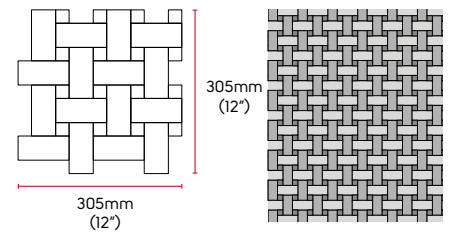

AT A GLANCE

We have an impressive palette of wood, stone and solid colour designs to choose from, all cut from our individual planks and tiles, and available in a variety of thicknesses including 2mm, 2.5mm and 3mm.

Art Select 3mm

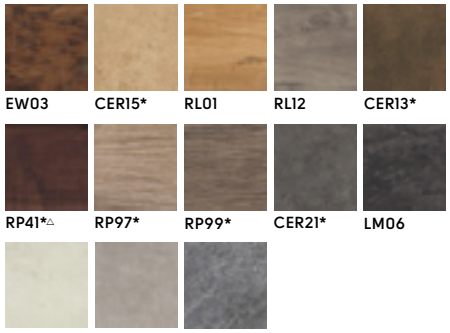

Opus 2.5mm



Solid colours 2.5mm



* For Kaleidoscope use only.

Van Gogh 3mm

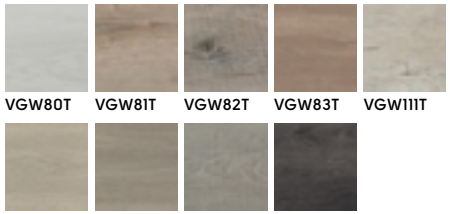

Knight Tile 2mm

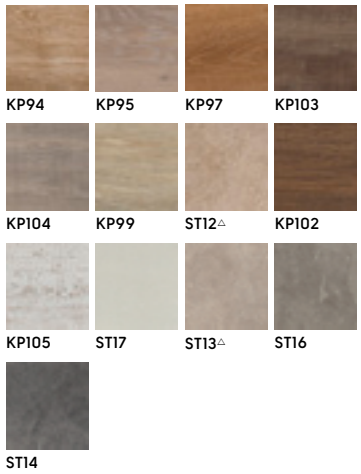

△Available in 2mm, 2.5mm and 3mm depths.



Bespoke Van Gogh: Ebony **VGW89T** | Cool Grey Oak **VGW113T** | Nimbus Oak **VGW125T***

* This design is no longer in production, suitable alternatives are available.

Kaleido SCOPE gluedown

A quick reference guide for each design in our Kaleidoscope range.

		GLUEDOWN
Abstract	**Name**	**Tile**
	Pyramid	KAL01
	Cubix	KAL02
	Cubix	KAL03
	Pennon	KAL04
	Pennon	KAL05
	Apex	KAL06
	Apex	KAL07
	Hexa	KAL08
	Hexa	KAL09
	Tripoint	KAL10
	Cubix	KAL13
	Apex	KAL14
	Woven	KAL11
	Woven	KAL12
	Casablanca	SP219
	Marrakesh	SP220

Scan the QR code to see full technical specification for Kaleidoscope.



Hexa **CER14** | **CER17** | **CER21** | **V20**

GLUEDOWN
KALEIDOSCOPE

DESIGN COMPONENTS

DESIGN STRIPS

To complete your look, add a design strip.

Choose from a wide range of tones and textures available in 3mm, 5mm and 10mm. Place these between planks or tiles to create a natural grouting effect or to enhance the design of your floor.

All 3mm, 5mm and 10mm design strips are 915mm in length and are sold in packs of 25 lengths.

Design strip	compatible with
Blond **DS02**	
Honey **DS03**	
Coffee **DS04**	
Russet **DS05**	
Chocolate **DS06**	
Ebony **DS07**	
Chalk **DS10**	
Concrete **DS12**	
Stone **DS14**	
Clay **DS15**	
Charcoal **DS16**	
Silver **DS17**	
White Linen **DS21**	
Graphite **DS22**	
Cream **DS23**	
Feather **DS24**	
Onyx **DS25**	
Shadow **DS26**	

Available for use with all* our gluedown ranges.

*Knight Tile Quiet is not compatible.



Art Select: Verona Quartzite **LM48** | DS10 10mm and 3mm design strips

SOLID COLOURS

To add visual interest to your Karndean floor, there are ten solid colours available in 2.5mm depth for use with Opus and the Heritage Collection. These colours can also be cut into any of our Kaleidoscope designs or used when designing a custom feature.


Baby Blue **V11**


Azure **V12**


Laurel **V13**


Blush **V14**


Gold **V15**


Crimson **V16**


Taupe **V17**


Terracotta **V18**


Dove Grey **V19**

Lace **V20**

	Standard	Result
Size	EN ISO 24342	Various
Thickness	EN ISO 24346	2.5 mm
Wear layer	EN ISO 24340	0.55 mm
Surface treatment		K-Guard+® PU coating
Warranty	Light Industrial Commercial Residential	15 years* 15 years* Lifetime warranty*
Mass per unit area	EN ISO 23997	4335 g/m^2
Standards	EN ISO 10582	
Classification	EN 685 / EN ISO 10874- Light industrial EN 685 / EN ISO 10874- Commercial EN 685 / EN ISO 10874- Domestic	41: Light industrial general 32: Commercial moderate 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN ISO 10582	Type 1
Dimensional stability	EN 434	Pass (≤0.25%)
Acoustic impact noise reduction**	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 2 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation – residual	EN 433	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302 / EN 12664 Underfloor heating	0.0097 m²K/W Suitable. Max 27°C
Slip resistance***	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value	BS 8493:2008+A1:2010	Please refer to QR code at the bottom of the page
Adhesive	Karndean Universal Pressure Sensitive Silane	Yes Yes Yes
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Acoustic Impact Noise Reduction values are based on other 2.5 mm products (Opus).

*** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Solid Colours.

BESPOKE FEATURES & LOGOS

We offer a custom design service when a project requires something more than our standard designs.

We offer seven designs as standard, which can be made in most colours from the Karndean Designflooring range.

1: Supply your design or ask to see our standard design features.
Some of our standard designs have been included below.


Cartwheel


Celtic


Galaxy


Sun


Star


Cartwheel with border


Nexus

2: Choose your colours

We recommend you make the background colour of your chosen feature the same as your floor, then choose remaining colours to coordinate with the finishes in your room.

3: Decide on a size

You can select the size of your feature to fit perfectly into any shape of room. Our features come in a standard 36" size but can be scaled up or down to suit. Please contact your Commercial Specification Manager for further information.

Looking for a bespoke design?

If you're looking for something a little bit different, you can design your own unique feature. Speak to your Commercial Specification Manager for further information and we'll bring your vision to life.



RIGID CORE



Van Gogh: Golden Brushed Oak **SM-VGW122T-RKP**

WHY RIGID CORE?

Our rigid core ranges are ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. A click-locking mechanism allows for quick installation and the pre-attached backing eliminates the need for a separate underlayment.

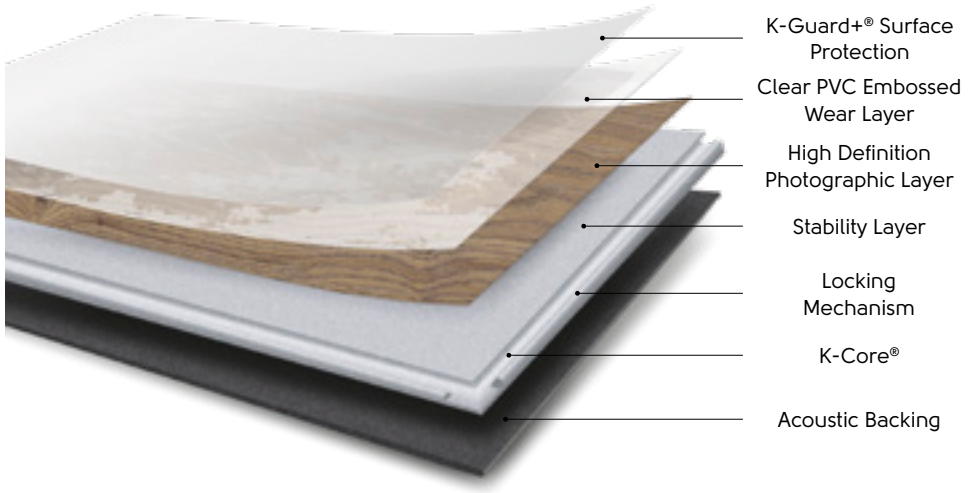

Rigid core benefits

Quick and easy to install.

Hides subfloor imperfections.

2G™ and 5G® click-locking systems.

Suitable for subfloors with elevated moisture found in some new builds and extensions.

Reduces noise transfer to rooms below by up to 21dB.

Enables preservation of existing floor.

	Standard	5G® locking system^*
Surface treatment		K Guard+® PU coating
Warranty**	Commercial Residential	15 years Lifetime warranty
Mass per unit area	EN ISO 23997	7480 g/m²
Standards	EN 16511	Pass: (Multilayer modular floorcovering panels)
Classification	EN ISO 10874: Commercial EN ISO 10874: Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 13329 Annex E	Pass (>4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (<0.25%)
Swelling	ISO 24336	Pass (0.2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL_w= 21 dB
Indentation – residual	ISO 24343-1	Pass (≤0.1 mm)
Impact resistance	EN 13329 Annex F	Pass (>1800 mm)
Castor chair continuous use	EN 425 / ISO 4918	Pass (25000 cycles)
Thermal resistance	ISO 8302	0.0515 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance***	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data
Adhesive	None required;please install according to our installation instructions.	
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3 -2014 v4.0 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2022/6.5RC/EN/01
CA / DOP	BS EN 14041	DOP 2022/UKCA/6.5RC/01
Recycling		Suitable
Phthalate free		Yes

^ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

* 5G® short edge; 2G™ long edge except, SM-VGW121T-RKP, SM-VGW122T-RKP, SM-VGW8105-RKP, SM-VGW8116-RKP which are modified 2G™ on short edge and standard 2G™ on long edge.

** Subject to terms. Please see our website.

*** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Van Gogh.

VAN GOGH
WOOD

708.0mm x 177.0mm (27.87" x 6.97")

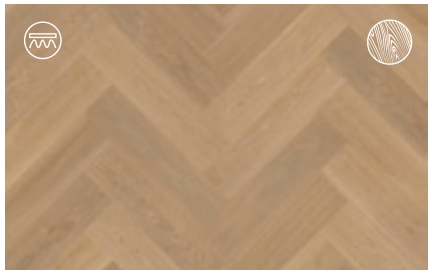

Warm Brushed Oak **SM-VGW121T-RKP**

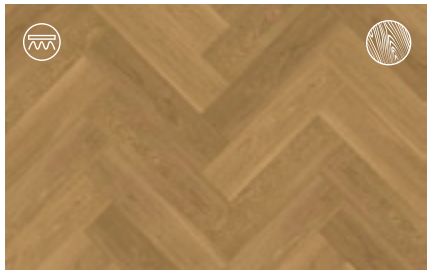

Golden Brushed Oak **SM-VGW122T-RKP**



Texas White Ash **SM-VGW8105-RKP**

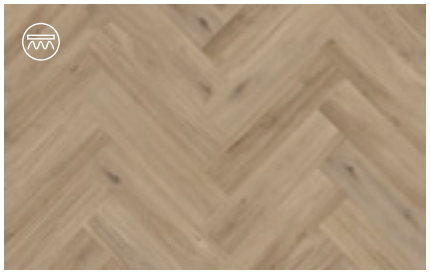

Canadian Urban Oak **SM-VGW8116-RKP**

Also available in gluedown.

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 6.5 mm **Wear Layer:** 0.55 mm **Bevelled edge:** Micro	**Box Quantity:** 3.008m² / 24 planks **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 160 for full technical specification



Texas White Ash **SM-VGW8105-RKP**

1420.0 x 225.0mm (55.91" x 8.86")


Baltic Washed Oak **RKP8101**


Texas White Ash **RKP8105**


Antique French Oak **RKP8110**


Baltic Limed Oak **RKP8111**


Baltic Mistral Oak **RKP8112**


English Character Oak **RKP8115**

Also available in gluedown.

Thickness: 6.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 3.195m² / 10 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 160 for full technical specification


Baltic Mistral Oak **RKP8112**

RIGID CORE
VAN GOGH

1420.0 x 225.0mm (55.91" x 8.86")



Canadian Urban Oak **RKP8116**



Canadian Nude Oak **RKP8117**



Warm Brushed Oak **VGW121T-RKP**



Golden Brushed Oak **VGW122T-RKP**

Also available in gluedown.

Registered emboss
Emboss texture matches the pattern of the design giving it a realistic true grain appearance.

Thickness: 6.5 mm **Wear Layer:** 0.55 mm **Bevelled edge:** Micro	**Box Quantity:** 3.195m² / 10 planks **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 160 for full technical specification



Canadian Nude Oak **RKP8117**

RIGID CORE
VAN GOGH

	Standard	5G® locking system^*
Surface treatment		K Guard+® PU coating
Warranty**	Commercial Residential	15 years Lifetime warranty
Mass per unit area	EN ISO 23997	7480 g/m²
Standards	EN 16511	Pass: (Multilayer modular floorcovering panels)
Classification	EN ISO 10874: Commercial EN ISO 10874: Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN 438-2	Pass (grade 5)
Light fastness	EN ISO 105-B02	Pass (≥6)
Abrasion resistance	EN 13329 Annex E	Pass (>4000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (<0.25%)
Swelling	ISO 24336	Pass (0.2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL_w= 21 dB
Indentation – residual	ISO 24343-1	Pass (≤0.1 mm)
Impact resistance	EN 13329 Annex F	Pass (>1800 mm)
Castor chair continuous use	EN 425 / ISO 4918	Pass (25000 cycles)
Thermal resistance	ISO 8302	0.0515 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance***	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data
Adhesive	None required;please install according to our installation instructions.	
Environmental	Indoor Air Comfort Floorscore SCS-EC10.3 -2014 v4.0 ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Indoor air quality certified; Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2022/6.5RC/EN/01
CA / DOP	BS EN 14041	DOP 2022/UKCA/6.5RC/01
Recycling		Suitable
Phthalate free		Yes

^ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

* 5G® short edge; 2G™ long edge except, SM-VGW121T-RKP, SM-VGW122T-RKP, SM-VGW8105-RKP, SM-VGW8116-RKP which are modified 2G™ on short edge and standard 2G™ on long edge.

** Subject to terms. Please see our website.

*** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Van Gogh.

VAN GOGH
STONE

457.0mm x 600.0mm (17.99" x 23.62")



Frosted Stone **RKT2401**



Cotswold Stone **RKT2405**



Volcanic Black **RKT2406**

Also available in gluedown.

Thickness: 6.5 mm
Wear Layer: 0.55 mm
Bevelled edge: Standard

Box Quantity: 2.742m² / 10 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 168 for full technical specification



Frosted Stone **RKT2401**

RIGID CORE
VAN GOGH



A quick reference guide for each design in our Van Gogh wood and stone range.

		GLUEDOWN			RIGID CORE	
Wood	**Name**	**Plank**	**Herringbone**	**Panel**	**Plank**	**Herringbone**
	Antique French Oak	VGW8110	SM-VGW8110	-	RKP8110	-
	Auckland Oak	VGW52T	-	-	-	-
	Baltic Limed Oak	VGW8111	-	-	RKP8111	-
	Baltic Mistral Oak	VGW8112	-	-	RKP8112	-
	Baltic Washed Oak	VGW8101	-	-	RKP8101	-
	Canadian Nude Oak	VGW8117	SM-VGW8117	-	RKP8117	-
	Canadian Urban Oak	VGW8116	SM-VGW8116	-	RKP8116	SM-VGW8116-RKP
	Classic Oak	VGW86T	SM-VGW86T	-	-	-
	Cocoa Apres Oak*	VGW145T*	SM-VGW145T*	PAN-VGW145T	-	-
	Cool Grey Oak	VGW113T	-	-	-	-
	Country Oak	VGW81T	SM-VGW81T	-	-	-
	Croftmore Oak	VGW8240	SM-VGW8240	-	-	-
	Distressed Oak	VGW82T	-	-	-	-
	Ebony	VGW89T	-	-	-	-
	English Character Oak	VGW8115	-	-	RKP8115	-
	French Oak	VGW85T	SM-VGW85T	-	-	-
	Glenmore Oak	VGW8237	SM-VGW8237	-	-	-
	Golden Brushed Oak	VGW122T	SM-VGW122T	-	VGW122T-RKP	SM-VGW122T-RKP
	Grey Brushed Oak	VGW120T	SM-VGW120T	-	-	-
	Hayfield Oak	VGW8241	SM-VGW8241	-	-	-
	Hessian Oak	VGW93T	-	-	-	-
	Honey Apres Oak	VGW147T*	SM-VGW147T*	PAN-VGW147T		
	Honey Oak	VGW94T	-	-	-	-
	Indy Urban Elm	VGW148T*	SM-VGW148T*	-	-	-
	Linen Prime Oak	VGW149T*	SM-VGW149T*	-	-	-
	Natural Prime Oak	VGW115T	SM-VGW115T	-	-	-
	Neutral Brushed Oak	VGW126T	SM-VGW126T	-	-	-
	Sable Apres Oak	VGW146T*	SM-VGW146T*	PAN-VGW146T	-	-
	Salvaged Barnwood	VGW123T	-	-	-	-
	Smoked Oak	VGW70T	-	-	-	-
	Texas Grey Ash	VGW8239	SM-VGW8239	-	-	-
	Texas White Ash	VGW8105	SM-VGW8105	-	RKP8105	SM-VGW8105-RKP
	Truffle Prime Oak	VGW150T*	SM-VGW150T*	-	-	-

		GLUEDOWN		RIGID CORE	
Wood	**Name**	**Plank**	**Herringbone**	**Plank**	**Herringbone**
	Walnut	VGW87T	-	-	-
	Warm Ash	VGW8103	-	-	-
	Warm Brushed Oak	VGW121T	SM-VGW121T	VGW121T-RKP	SM-VGW121T-RKP
	Wellington Oak	VGW53T	-	-	-
	White Washed Oak	VGW80T	-	-	-

		GLUEDOWN		RIGID CORE	
Stone	**Name**	**Tile**	**Herringbone**	**Tile**	**Herringbone**
	Bianco Breccia Marble	VGT3021	-	-	-
	Bronze Castello Marble	VGT2416	-	-	-
	Cotswold Stone	VGT2405	-	RKT2405	-
	Frosted Stone	VGT2401	-	RKT2401	-
	Grigio Breccia Marble	VGT3019	-	-	-
	Milanese Slate	VGT2420	-	-	-
	Palazzo Marble	VGT2413	-	-	-
	Pebble Grey	VGT2410	-	-	-
	Roman Slate	VGT2422	-	-	-
	Tortora Breccia Marble	VGT3018	-	-	-
	Venetian Slate	VGT2423	-	-	-
	Volcanic Black	VGT2406	-	RKT2406	-

	Standard	i4F drop-lock technologies[1]
Surface treatment		K-Guard+® PU coating
Warranty[2]	Commercial Residential	15 years Lifetime warranty
Mass per unit area	EN ISO 23997	8860 g/m²
Standards	ISO 20326	Pass
Classification	ISO 10874: Commercial ISO 10874: Domestic	33: Commercial very heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987 / EN 423	Excellent
Light fastness	EN ISO 105-B02	Pass (≥6)
Locking strength	EN ISO 20326 Annex D	Pass (≥ 2.0 kN/m)
Furniture chair leg	EN ISO 16581	Pass (no visible damage)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL_w = 17 dB
Indentation - residual	ISO 24343-1	Pass (≤0.1mm)
Castor chair continuous use	ISO 4918	Pass (25,000 cycles)
Thermal resistance	EN 12664	0.074 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance[3]	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	Scan QR code below to view full technical data
Adhesive		None Required, Please install according to our installation instructions.
Environmental	Indoor Air Comfort ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions. Manufactured to quality and environment management systems standard
Recycling		Suitable
Phthalate free		Yes

[1] These products utilise proprietary 3L Triplelock® and i4F Technology www.patents-i4f.com

[2] Subject to terms. Please see our website.

[3] Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Korlok Regent.

KORLOK REGENT WOOD

1510.0mm x 220.0mm (59.45" x 8.66")


Stanmore Oak **RKP9001**


Greenwich Oak **RKP9002**


Primrose Oak **RKP9003**


Kensington Oak **RKP9004**


Victoria Oak **RKP9005**


Richmond Oak **RKP9006**


Registered emboss

Thickness: 8.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 1.994m² / 6 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 186 for full technical specification


Stanmore Oak **RKP9001**

720.1mm x 119.9mm (28.35" x 4.72")


Stanmore Oak **SM-RKP9001**

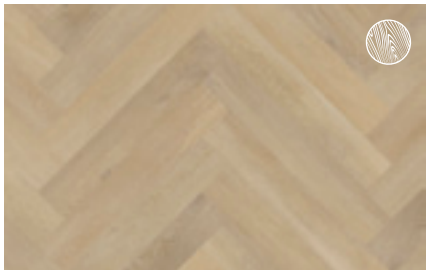
Greenwich Oak **SM-RKP9002**

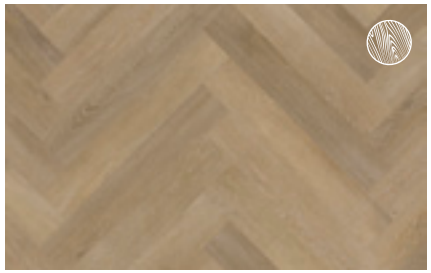
Primrose Oak **SM-RKP9003**


Kensington Oak **SM-RKP9004**

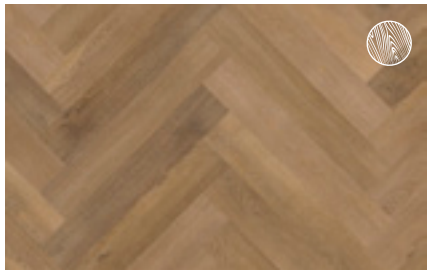
Victoria Oak **SM-RKP9005**

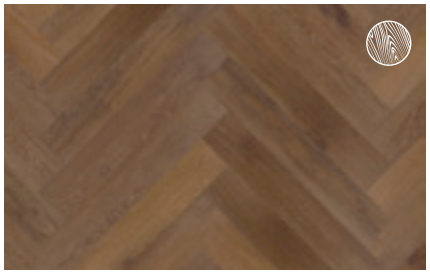
Richmond Oak **SM-RKP9006**


Registered emboss

Thickness: 8.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 2.073m² / 24 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 186 for full technical specification

938.5mm x 305.1mm (36.95" x 12.01")


Stanmore Oak **CP-RKP9001**


Greenwich Oak **CP-RKP9002**


Primrose Oak **CP-RKP9003**


Kensington Oak **CP-RKP9004**


Victoria Oak **CP-RKP9005**

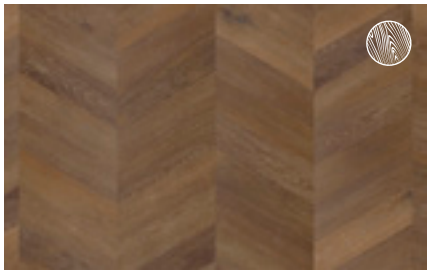
Richmond Oak **CP-RKP9006**


Registered emboss

Thickness: 8.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 1.719m² / 6 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 186 for full technical specification

1074.9mm x 214.9mm (42.32" x 8.46")



Stanmore Oak **CL-RKP9001**

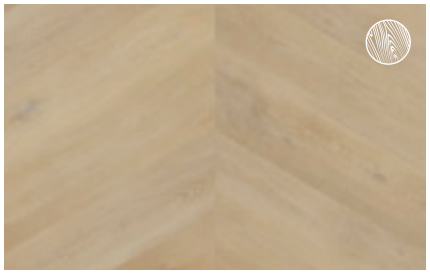

Greenwich Oak **CL-RKP9002**

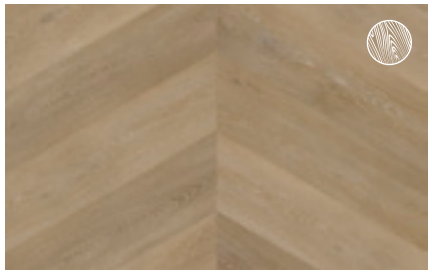

Primrose Oak **CL-RKP9003**



Kensington Oak **CL-RKP9004**



Victoria Oak **CL-RKP9005**



Richmond Oak **CL-RKP9006**



Registered emboss

Thickness: 8.0 mm
Wear Layer: 0.55 mm
Bevelled edge: Micro

Box Quantity: 1.848m² / 8 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 186 for full technical specification



Victoria Oak **CL-RKP9005**

RIGID CORE
KORLOK REGENT

Korlok Regent RIGID CORE

A quick reference guide for each design in our Korlok Regent wood range.

		RIGID CORE			
Wood	**Name**	**Large plank**	**Herringbone**	**Large chevron**	**Chevron**
	Stanmore Oak	RKP9001	SM-RKP9001	CL-RKP9001	CP-RKP9001
	Greenwich Oak	RKP9002	SM-RKP9002	CL-RKP9002	CP-RKP9002
	Primrose Oak	RKP9003	SM-RKP9003	CL-RKP9003	CP-RKP9003
	Kensington Oak	RKP9004	SM-RKP9004	CL-RKP9004	CP-RKP9004
	Victoria Oak	RKP9005	SM-RKP9005	CL-RKP9005	CP-RKP9005
	Richmond Oak	RKP9006	SM-RKP9006	CL-RKP9006	CP-RKP9006



Greenwich Oak **SM-RKP9002**

LOOSE LAY



Neutral Oak **LLP307**

WHY LOOSE LAY?

Our loose lay range, Karndean LooseLay, features our K-Wave® friction grip backing which helps hold the product in place, it creates a strong bond to the subfloor using a combination of weight and friction. Perfect for temporary and permanent use, Karndean LooseLay is ideal if you are interested in changing out the flooring frequently or want to reduce sound passing to the room below.

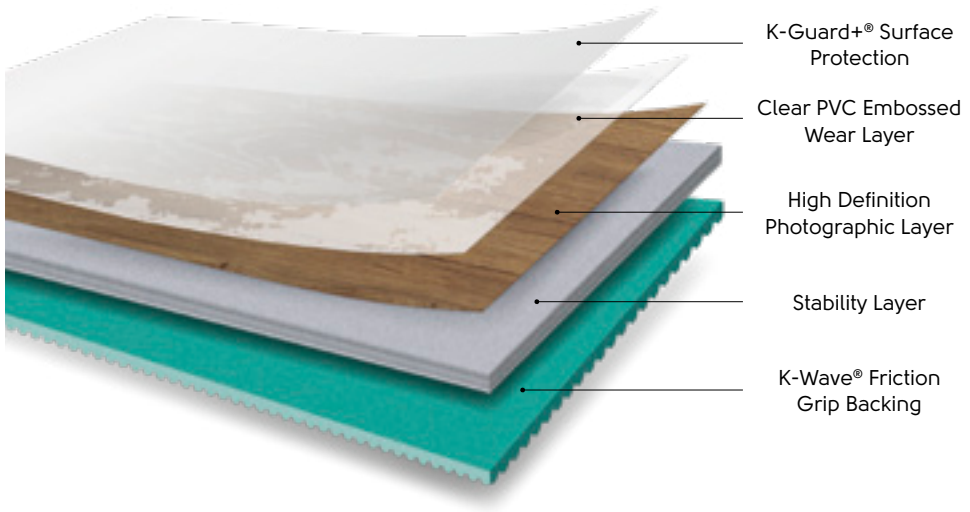

Loose lay benefits

Quick and easy to install.

Reduces noise transfer by 13dB.

No expansion gap required.

Easy access to underfloor panels.

Suitable for subfloors with elevated moisture found in some new builds and extensions.

Minimises disruption by installing over most hard subfloors.

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	7470 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Light industrial EN ISO 10874- Commercial EN ISO 10874- Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.10%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 13 dB
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0245 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Please install according to our installation instructions.	
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Silver certified product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2017/LL/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/LL/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Karndean LooseLay.

KARNDEAN LOOSELAY WOOD

1500.0mm x 250.0mm (59.06" x 9.84")


Twilight Oak **LLP301**


Pearl Oak **LLP306**


Neutral Oak **LLP307**


French Grey Oak **LLP308**


Champagne Oak **LLP310**


Character Walnut **LLP315**


Lemon Spotted Gum **LLP317**

Thickness: 4.5 mm **Wear Layer:** 0.55 mm **Bevelled edge:** None	**Box Quantity:** 3.000m² / 8 planks **Commercial Warranty:** 15 years **Domestic Warranty:** Lifetime	See page 200 for full technical specification


Lemon Spotted Gum **LLP317**

1050.0mm x 250.0mm (41.34" x 9.84")


Country Oak **LLP92**


Ashland **LLP95**


Hudson **LLP99**^


Heritage Oak **LLP102**


Vintage Timber **LLP105**


Antique Timber **LLP106**

Thickness: 4.5 mm
Wear Layer: 0.55 mm
Bevelled edge: None

Box Quantity: 3.150m² / 12 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 200 for full technical specification

^ Subject to availability

1050.0mm x 250.0mm (41.34" x 9.84")


Providence **LLP108**


Hartford **LLP112**


Cambridge **LLP113**

Thickness: 4.5 mm
Wear Layer: 0.55 mm
Bevelled edge: None

Box Quantity: 3.150m² / 12 planks
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 200 for full technical specification

^ Subject to availability

LOOSE LAY
KARNDEAN LOOSELAY

	Standard	Result
Surface treatment		K-Guard+® PU coating
Warranty*	Light Industrial Commercial Residential	15 years 15 years Lifetime warranty
Mass per unit area	EN ISO 23997	7470 g/m²
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874- Light industrial EN ISO 10874- Commercial EN ISO 10874- Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B_{fl}-s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥7)
Abrasion resistance	EN ISO 10582	Type 1
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤0.10%)
Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8	$\triangle L_W$= 13 dB
Indentation – residual	EN ISO 24343-1	Pass (≤0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0245 m²K/W Suitable for underfloor heating. Max 27°C
Slip resistance**	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value	BS 8493:2008+A1:2010	Scan QR code below to view full technical data.
Adhesive	Please install according to our installation instructions.	
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Silver certified product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Partnerships	National Building Specification Royal Institute of British Architects	
CE / DOP	EN 14041	DOP 2017/LL/EN/02
CA / DOP	BS EN 14041	DOP 2021/UKCA/LL/01
Recycling		Suitable
Phthalate free		Yes

* Subject to terms. Please see our website.

** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Scan the QR code to see full technical specification for Karndean LooseLay.

KARNDEAN LOOSELAY STONE

500.0mm x 610.0mm (19.69" x 24.02")


Arizona **LLT200**


Colorado **LLT201**


Indiana **LLT202**


Madison **LLT203**


Seattle **LLT214**

Thickness: 4.5 mm
Wear Layer: 0.55 mm
Bevelled edge: None

Box Quantity: 3.050m² / 10 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 206 for full technical specification

500.0mm x 610.0mm (19.69" x 24.02")


Utah **LLT216**


Quebec **LLT219**^

Thickness: 4.5 mm
Wear Layer: 0.55 mm
Bevelled edge: None

Box Quantity: 3.050m² / 10 tiles
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 206 for full technical specification

1000.0mm x 1000.0mm (39.37" x 39.37")


Colorado **LG-LLT201**


Quebec **LG-LLT219**

Thickness: 4.5 mm
Wear Layer: 0.55 mm
Bevelled edge: None

Box Quantity: 1.000m² / 1 tile*
Commercial Warranty: 15 years
Domestic Warranty: Lifetime

See page 206 for full technical specification

^ Subject to availability * Minimum order quantity = 50

LOOSE LAY
KARNDEAN LOOSELAY

A quick reference guide for each design in our Karndean LooseLay wood and stone range.

		LOOSE LAY
Wood	**Name**	**Plank**
	Antique Timber	LLP106
	Ashland	LLP95
	Cambridge	LLP113
	Champagne Oak	LLP310
	Character Walnut	LLP315
	Country Oak	LLP92
	French Grey Oak	LLP308
	Hartford	LLP112
	Heritage Oak	LLP102
	Hudson	LLP99^
	Lemon Spotted Gum	LLP317
	Neutral Oak	LLP307
	Pearl Oak	LLP306
	Providence	LLP108
	Twilight Oak	LLP301
	Vintage Timber	LLP105

^ Subject to availability

		LOOSE LAY	
Tile	**Name**	**Tile**	**Large tile**
	Arizona	LLT200	-
	Colorado	LLT201	LG-LLT201
	Indiana	LLT202^	-
	Madison	LLT203	-
	Quebec	LLT219^	LG-LLT219
	Seattle	LLT214	-
	Utah	LLT216	-

^ Subject to availability

SUPPORT

CLEANING GUIDE

Karndean floors are very hardwearing, but as with any flooring, they need to be looked after. There are many ways to protect your Karndean floor and prevent any damage. We recommend following our Cleaning and Maintenance instructions and reading our Maintenance Advice for helpful hints and tips on how to look after your floor.



Karndean Clean



Karndean Remove



Karndean Refresh

Maintaining the floor

The floor should be cleaned regularly, though the frequency will depend upon the level of traffic across the floor and the amount of dust and dirt transferred from the surrounding environment.

1. Remove loose dust and dirt from the floor using a soft brush or dust mop.

2. Dilute Karndean Clean in accordance with the label instructions.

3. Liberally apply the cleaning solution over the entire floor using a clean mop, then soak up the cleaning solution using a damp (not wet) mop and leave to dry.

4. Thoroughly clean the mop with cold running water.

Karndean Clean can be used with automatic cleaning appliances (e.g. scrubbing machines), especially for larger areas or for the removal of stubborn dirt.

Refreshing the floor

Over time, heavy traffic will wear at the surface of your Karndean floor. To restore your floor, we recommend the use of Karndean Remove and Karndean Refresh.

Before applying Karndean Remove

1. Remove all free-standing objects from the floor
2. Vacuum or clean any entrance matting or rugs and set aside
3. Remove loose dust and dirt from the floor using a soft brush or dust mop.

Applying Karndean Remove using a rotary scrubber

1. Mix Karndean Remove in accordance with the label instructions and pour into rotary scrubber machine.
2. Scrub the floor using the rotary scrubber fitted with a red scrubbing pad. For the edges of the floor and hard to reach areas, use a white scrubbing pad fitted to the end of an applicator.

Applying Karndean Remove using a mop and scrubbing pad

1. Mix Karndean Remove in accordance with the label instructions.
2. Apply cleaning solution to the floor using a mop, working in an area no larger than 5m x 5m (16' x 16') at a time.
3. Allow the solution to remain on the floor for approximately 10 minutes, not allowing it to dry.
4. Scrub the floor using a white scrubbing pad fitted to the end of an applicator.

Removal of Karndean Remove

1. Remove all residue with a wet vacuum or mop, and rinse the floor using clean water.
2. After the floor has dried, check all residue has been removed.
3. Equipment should be cleaned in cold running water and stored safely.

Applying Karndean Refresh

When using Karndean Refresh, avoid, where possible, strong sunlight and draughts and ensure all under floor heating is switched off before starting work.

1. Using a lint free mop, apply undiluted Karndean Refresh in a thin even coat using overlapping strokes. Where possible, work parallel to the main light source e.g. window.
2. Allow the floor to dry for approximately 30 minutes.
3. Apply a second coat of Karndean Refresh working in the opposite direction to the first coat.
4. Allow the floor to dry for at least six hours, or preferably overnight.
5. Thoroughly clean the mop with cold running water.

OUR WARRANTY

Conditions of the Purchase Warranty

The Purchase Warranty is conditional on the following have been met:

1. The product has been fitted by a professional installer according to instructions, current at the time of installation, using the correct materials and adhering to the BS 8203 code of practice.
2. The subfloor meets the relevant building standards, current at the time of installation, and the adhesives recommended for the application were used.
3. The product used has been correctly specified for the use of room in which it was installed and in accordance with the guidelines set out in EN 649.
4. Maintenance has been observed in accordance with the Company's cleaning and maintenance instructions and suitable barrier matting has been provided to all external entrances to prevent the ingress of dirt.

Exclusions of the Purchase Warranty

1. Defects caused by sub-standard installation.
2. Any wilful or accidental damage (fire, flood, etc.).
3. Any immediately obvious manufacturing defects should be notified to the Company within 6 months of installation.
4. Damage to products that are a result of poor maintenance.
5. Defects caused by poor subfloor preparation, including residual moisture in the subfloor.
6. Damage caused by stains, excessive heat, cuts and/or other abuses that the floor may be subjected to during use.
7. Damage caused by indentation and abrasion: e.g. unprotected castor wheels, furniture legs, high and spiked heels.

Claims

1. All claims must be submitted to the Supplier in writing as soon as they become apparent.
2. The Company will require information regarding the claim, including a copy of the invoice, product detail, installation/ subfloor information, samples removed from the installation, photographs and a report of the defect.
3. Once the claim is raised, the Company may choose to inspect the installation, and satisfying themselves that the problem is their responsibility, will replace any defective material at no charge with the same or similar product (subject to availability).
4. The Company may also reimburse a proportionate cost towards labour, uplift and re-installation, providing costs are greed with the Company before work commences.

The Company shall not accept or be liable for any direct, indirect, special or consequential loss, expense cost, claim damages (including liquidated damages).

Help and advice Tel: 01386 820100

If it is found to be necessary to replace a product which is no longer available, Karndean reserves the right to replace the floor with a product of equal value and specification to that which was originally installed.

Save as detailed above and to the fullest extent permitted by law, Karndean Designflooring shall not accept or be liable under this Warranty for any direct, indirect, special or consequential loss (including liquidated damages).

This Purchase Warranty does not affect your statutory rights.

INSTALLATION GUIDELINES

All installation guides are available to download via our website. Please scan the QR code to view them online.

Installation guides

VERSILAY INSTASHIELD®

General Information

Versilay InstaShield® is a roll based peel and stick acoustic underlay for fast and easy installation of Gluedown LVT products over existing flat and even subfloors.

Acclimatisation

Prior to installation, acclimatise Versilay InstaShield® for 24 hours in the room where the installation will take place at 18-27°C. Remove all packaging and store rolls in an upright position. If conditions are below this temperature range, increase the acclimatisation period to 48 hours.

Subfloor preparation

The subfloor should be smooth, clean, dry and meet the SR1 classification - no more than 3mm undulation over a 2m distance. Fill minor imperfections with a suitable repair compound. Versilay InstaShield® can be installed over floors with relative humidity of 95% RH (for carbide method, 3CM for cementitious screeds, 1.4CM for anhydrite screeds). Versilay InstaShield® is suitable for installation over solid floors with a mechanical damp proof membrane in place including: concrete, sand and cement screeds, calcium sulphate screeds, terrazzo, tiled floors, plywood, hardwood, chipboard, and most existing fully bonded LVT floorcoverings with minimal preparation.

Underfloor heating (UFH): Compatible with underfloor heating and cooling systems, the floor surface should not exceed 27°C. The heat elements/source must be encapsulated within a screed or smoothing compound with a minimum depth of 10mm and the underlay adhered to the subfloor.

High solar gain areas: In glazed areas, subject to high levels of solar gain (direct sunlight),

Versilay InstaShield® should be adhered to the subfloor. Bond all areas exposed to direct sunlight and 1m beyond. Versilay InstaShield® should not be used in areas exposed to extreme solar gain (above 50°C on the floor), such as in front of large areas of glazing with direct sunlight or in conservatories.

Heavy traffic: Fully bond to the subfloor with a suitable adhesive in areas of heavy footfall or castor chair use. When adhering to the subfloor, the relative humidity of the subfloor should not exceed 75% RH (for carbide method, 2 CM for cementitious screeds, 0.3CM for anhydrite screeds). Adhere Versilay InstaShield® to the subfloor in line with BS 8203 for use with floor coverings (Cementitious Screeds, Anhydrite Screeds and Flooring Grade Plywood). Not recommended for use with non-permeable subfloors or substrates with poor adhesive characteristics. Not suitable for area subject to industrial use or heavy wheeled traffic.

Important

No expansion gap is necessary between the floor and fixed objects such as the walls. Versilay InstaShield® cannot be used in wet rooms. Do not run continuously through doorways. A 5mm break is required when going over 12 linear meters in any direction. No further adhesive is needed on the top surface of Versilay InstaShield® underlay.

	STANDARD	RESULT
Size	DIN EN 16354:2019-01	8,000mm x 1,000mm (± 1.00 mm)
Thickness	DIN EN 16354:2019-01	2.00 mm (± 0.15 mm)

M² per roll: 8m²
Roll Length: 8m
Roll Width: 1m

Thickness: 2mm
Impact sound reduction: 15dB
Residual Indentation: 0.34mm

Rolls per pallet: 40
M² per pallet: 320

Installation Instructions

Tools required - Utility knife with a sharp blade, scissors and hand roller

Step 1.

Roll out the underlay, foil side down (image 1). The underlay must be laid perpendicular to the intended direction of the floor (image 2).





Step 2.

Seams must be tightly butted together ensuring parallel row header joints are staggered. The underlay should remain free of any tape or fixings. Trim the underlay at the perimeter of the room leaving 50mm excess. Using a wide-bladed brick bolster, create a fold in the underlay at the edge of the room and remove the excess with a knife and straight edge, leaving no gaps between the underlay and the perimeter of the room or fixed objects (image 3). Roll the trimmed ends of the underlay back towards the subfloor, to ensure that it lays flat at the edges of the room (image 4).





Step 3.

Ensure that planks are carefully positioned so that they overlap the seams in the underlay (image 5). Lay the flooring one row at a time, using the planks as a template to trim the underlying release tape for each row with a utility knife using light pressure (image 6). Carefully position each plank onto the self-adhesive layer on the top of the underlay (image 7). Once complete, roll the floor level using a roller with a minimum weight 50kg. Roll the roller across the width of the planks to ensure that it has been properly pressed throughout.













VERSILAY CLASSIC®

General

Versilay Classic® is an acoustic underlay, for fast subfloor preparation. LVT can be adhered to Versilay straight after its installation.

Important

Do not lay in areas with high levels of moisture and free water. This includes wet rooms and some bathrooms.

For areas over 10 m length, add a total 1mm per extra metre to the expansion gap around the perimeter of the room. Maximum length 12m.

Substrate should be 75% RH, clean and dust free.

This product cannot be used with underfloor heating.

Acclimatisation

Versilay Classic® boards must be acclimatised in their sealed packaging, in the area where they are to be fitted, for at least 48 hours, at a temperature of at least 18°C.

Installation Instructions

Please read instructions in conjunction with graphics.

PLEASE NOTE: A manufacturer's installation guide is included in every pack. These instructions should be followed for all installations of Versilay classic®.

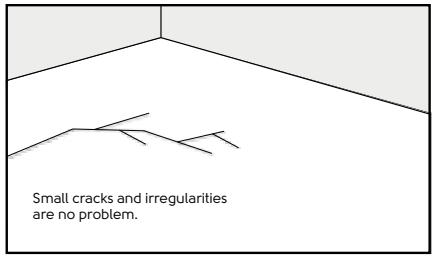

Fig.1

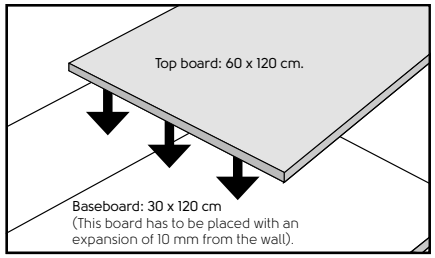

Fig.2

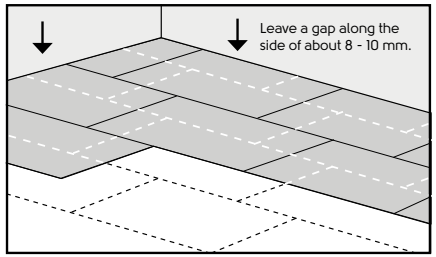

Fig.3

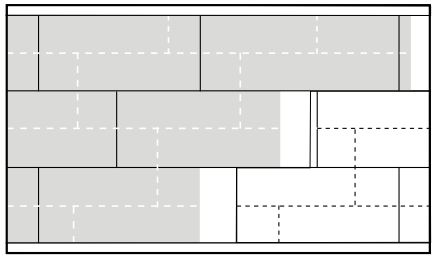

Fig.4

1. Versilay Classic® boards must acclimatise in their sealed packaging, in the area where they are to be fitted, for at least 48 hours, at a temperature of at least 18°C.
2. Ensure your substrate is dry (relative humidity reading below 75%), clean and without dust.
3. Make sure subfloor is dry, clean and dust free. Cover the subfloor with 200 micron polythene sheeting with 20 cm overlapped joins and secured down full length with aluminium tape.
4. The Versilay Classic® system consists of a baseboard and top board, each with a layer of interactive adhesive. Small irregularities in concrete or timber subfloors such as joints and cracks, are smoothed out by Versilay Classic® (fig.1). The baseboard is equipped with an isolating and levelling layer, which has to be laid facing down on the subfloor. Both base and top boards with facing adhesive layers are to be placed on top of one another and, by tapping them with a rubber hammer both adhesive layers will react to each other and bond together.
5. Setting out: Place the first row of Versilay Classic® baseboards as follows:

   The first baseboard has to be shortened to ¾ of its length and cut in half down its length. All the other baseboards of the first row are cut in half over their total length, install the first row with the protective film facing up and leave an expansion gap of 8-10 mm around the perimeter of the walls, pipes and other obstacles (fig.2 and fig.3). This also applies for the actual floor covering which is to be fitted on the Versilay Classic.
6. The second row: The first whole baseboard has to be cut to ¼ of its length, then place the following baseboards in brick-fashion.
7. The top boards: Just before the installation of the top boards, remove the protective film off the baseboards. Always start the first row with a full size top board and the next row with a half size one. Working this way, all the joints will be staggered and the baseboards will be covered, giving stability to the Versilay Classic® system (fig.4).

   Important: To ensure a clean installation do not walk on the layer of adhesive. Remove film from baseboards just before applying top board, this will reduce contamination of the adhesive on baseboards.
8. For areas over 10 m length, add a total 1 mm per extra metre to the expansion gap around the perimeter of the room. Maximum length 12 m. Every room is to be fitted separately, leaving a perimeter expansion gap of at least 8-10 mm and 16 mm in door openings when Versilay Classic® is continued in adjoining areas. The floor covering is to be bonded to the total surface of the Versilay Classic, and is not to exceed the edge of the Versilay Classic® subfloor, so the floor covering stops and starts where Versilay Classic® stops and starts.
9. Tap or roll all the top boards with a rubber hammer or a 75 kg roller. Always check the finished Versilay Classic® subfloor for irregularities.
10. Any irregularities of the joints can easily be sanded away with a 120-grain fine sandpaper. Vacuum clean the finished Versilay Classic® subfloor before bonding the floor covering.
11. For the best results and because of possible influences of air humidity, bond the floor covering on the Versilay Classic® no later than 48 hours, after installation.
12. Products must only be laid on subfloors where the moisture level does not exceed 75% RH when tested with a hygrometer in accordance with BS8203-4; 2001 (installation of Resilient Floor coverings).

TECHNICAL SERVICE CHARTER

Supporting you, supporting your customers

Who we are

Our dedicated Technical Services team offers technical advice and information to help ensure we provide you and your customers with the best possible support.

What we do

Our team of trained technical advisors are on hand to support you with:

- Technical installation queries
- Product specification advice
- Product issues
- General aftercare enquiries

Our commitment to you

We aim to provide the best service possible, resolving any enquiries or issues effectively and efficiently. We guarantee a friendly and helpful service, a fair appraisal of any issues or complaints and a commitment to work together to find the best solution for you.

We promise that our assessment will be impartial and honest. In return we ask that you inform us as soon as possible either before or during the fitting process of any potential problems so that we can give you specific help and advice.

Our service standards

We are committed to providing a high quality service. We aim to resolve any issues or complaints within 28 days and promise that during the period of investigation we will communicate regularly with you to keep you up to date with our progress.

Our process for handling issues and complaints is:

- Any issues or complaints received before 4pm will be logged on the same day (next working day for those received after 4pm).
- Where required, a site inspection will be carried out by one of our trained product technicians at a date and time convenient to and agreed with you.
- Following our investigation we will supply you with a full, impartial assessment of our findings and recommendations.

We want your feedback

We are constantly looking to develop and improve our service so we would like to encourage all of our customers to contact us with any feedback on our service.

To get in touch please call us on **01386 820102, option 6** or email us at **technical@karndean.co.uk**



Fleur Carson,
Managing Director

COMMERCIAL PROJECT REGISTRATION

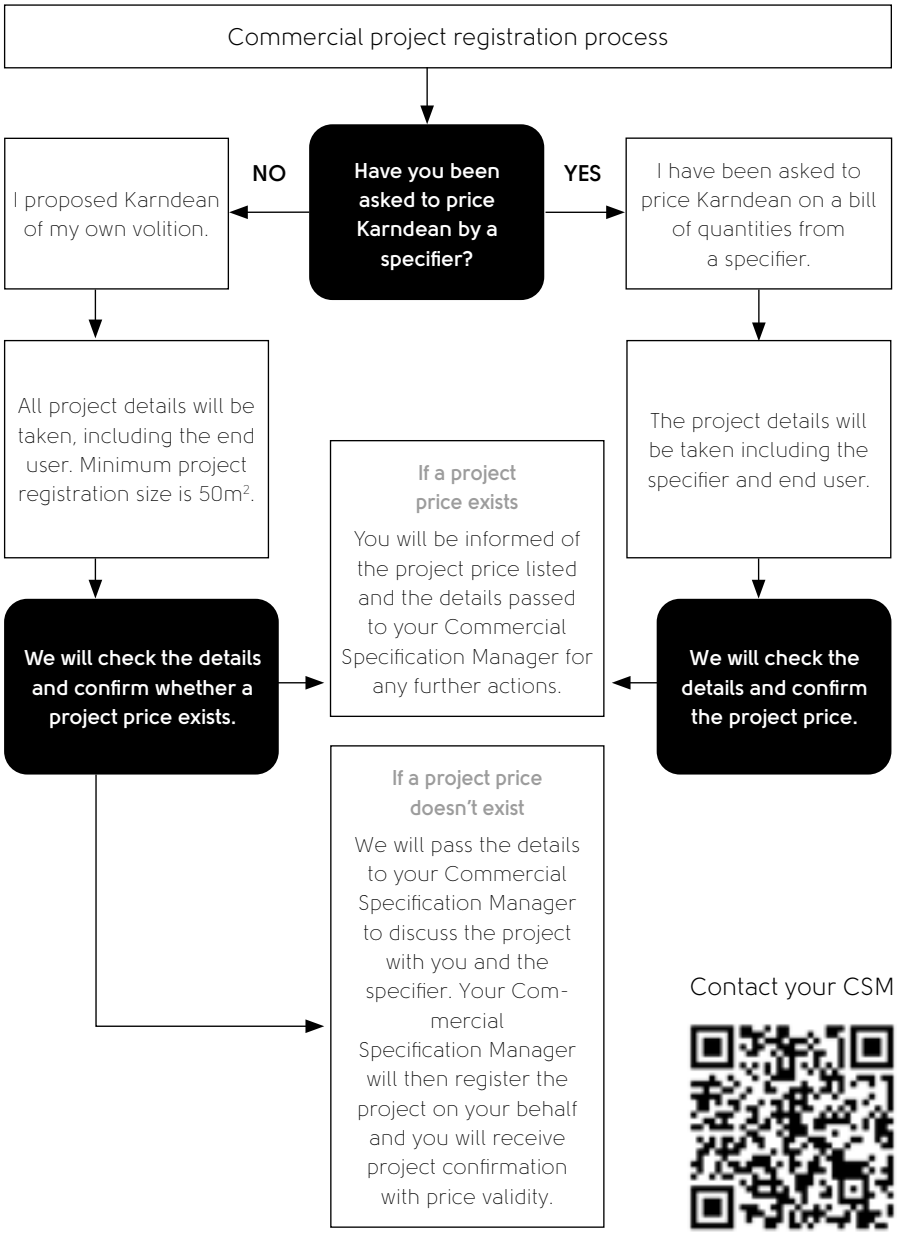

Contact your CSM

WEBSITE SUPPORT

Floorstyle floor designer

Our interactive room viewer, Floorstyle, lets you view our wide range of floors in typical residential and commercial settings.

With improved usability, more sector specific settings, optional colour schemes and side-by-side comparison, you can discover our stylish and highly practical flooring in a truly visual manner.

karndeancommercial.com/floorstyle



Online resources & inspiration

Browse our online resources and explore our latest commercial brochure, case studies, and environmental documents to help your clients find flooring solutions that meet both design and performance needs.

karndeancommercial.com/downloads





Technical hub

Range specific technical data sheets and installation guidelines can be viewed and downloaded on our website.

Explore our case studies covering various sectors including hospitality and leisure, retail and education to gain inspiration for your project.

karndeancommercial.com/technicalhub

SAMPLE SERVICE

Product samples are an integral part of putting together a proper proposal. We have both swatch and full size product samples available. Whether you're building a project moodboard or want to compare product colours and textures, we have the materials you need.

It's fast and easy to order product samples by phone, through the website with our sample service, or with your Commercial Specification Manager. At Karndean Designflooring, whatever you need and whenever you need it, all you have to do is ask.

Order samples

View our luxury vinyl flooring ranges.

karndeancommercial.com/samples

Contact Sales;

commercial@karndean.co.uk
01386 820200 option 3

Connect with your CSM;

karndeancommercial.com/appointment



TAKING ACTION. CREATING CHANGE.

Sustainable manufacturing.
Complete supply chain transparency. Closed loop product life cycles. And an even stronger commitments to fair and inclusive workplace.

Sustainabilty is a journey that requires a roadmap.

Ours is a detailed model that includes six areas of focus.

Karndean evolve®

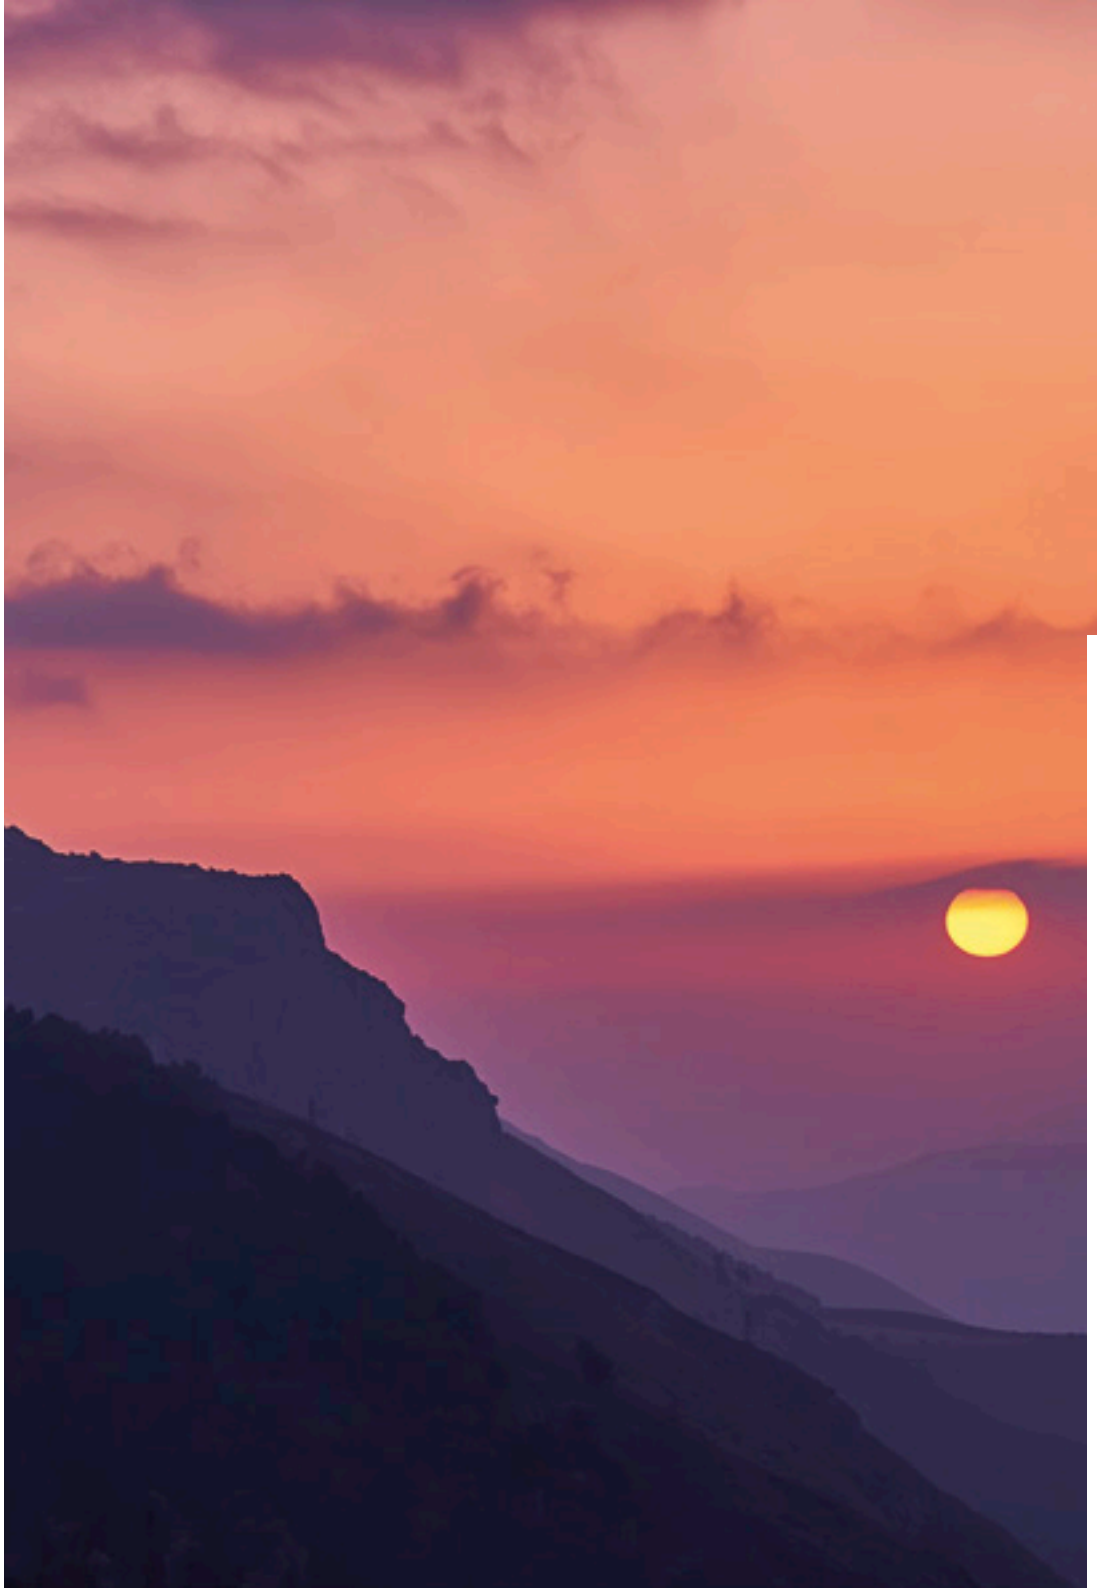

- CONFRONTING CLIMATE CHANGE
- HEALTH AND WELLBEING
- SUSTAINABLE USE OF RESOURCES
- DIVERSITY AND INCLUSION
- SUPPLY CHAIN TRANSPARENCY
- EDUCATION

Scan to find our EPDs or visit karndean.com/eco

KARNDEAN TRAINING ACADEMY

Build a solid foundation for your future at the Karndean Designflooring Training Academy

Take the first step toward mastering flooring installation, design, and craftsmanship with expert-led, hands-on training. Whether you're starting a new career or seeking to upskill, our courses equip you with the techniques, and industry knowledge to succeed in the fast-growing flooring sector.

Step confidently into your future - enroll today!

For more information on courses, visit our website: karndeancommercial.com, or reach out directly by email at training@karndean.co.uk or by phone at 01386 820170.









SHOWROOMS

You can explore our portfolio of designs in person at the following locations:

Karndean Commercial - London

Located in London's design district, our Georgian showroom showcases bespoke flooring to inspire your next project. Explore design options, view samples, and take chips samples away.

Book an appointment: clerkenwellshowroom@karndean.co.uk

London Showroom

20 Clerkenwell Green, Clerkenwell
London, England, EC1R 0DP

Karndean Designflooring

Find your perfect floor. Explore the full collection, try ideas at our design tables, and take samples away.

Book an appointment: designshowroom@karndean.co.uk

Evesham Showroom

Crab Apple Way, Vale Park, Evesham,
Worcestershire, England WR11 1GP

Design Centre Chelsea Harbour

Discover the full Karndean collection at our Chelsea Harbour showroom. Explore designs, create moodboards, and find inspiration.

Book an appointment: chelseaharbour@karndean.co.uk

London Showroom

Unit 307, Design Centre East,
Chelsea Harbour Drive, Lots Rd, London SW10 0XE

Material Source Studio

We have partnered with Material Source Studio to be part of a space that brings architects and designers the very best materials and furniture brands for commercial design. Their studios are a place for inspiration and collaboration, with a full calendar of seminars and events alongside the showroom space. materialsource.co.uk

Manchester Studio

1 Federation Street, NOMA,
Manchester, England, M4 4BF

Glasgow Studio

180 West Saint George Street,
Glasgow, Scotland, G2 2NR

PRODUCT INDEX

GLUEDOWN

Art Select WOOD



Product code	Product name	Page no
AP01	Spring Oak	35
AP02	Dawn Oak	35
AP03	Midnight Oak	35
AP05	Spanish Cherry	35
AP06	Morning Oak	35
AP07	Storm Oak	35
AP08	Salon Oak	35
EW02	Hickory Peppercorn	38
EW03	Hickory Nutmeg	38
EW21	Reclaimed Chestnut	43
HC01	Dawn Oak	38
HC02	Morning Oak	38
HC06	Midnight Oak	38
RL01	Spring Oak	39
RL02	Summer Oak	39
RL05	Spanish Cherry	39
RL12	Storm Oak	39
RL13	Salon Oak	39
RL20	Prairie Oak	43
RL21	Glacier Oak	43
RL22	Mountain Oak	43
RL23	Savannah Oak	43
RL24	Dune Oak	43
RL25	Canyon Oak	40
RL26	Basque Oak	43
RL27	Bellota Oak	44
RL28	Serrano Oak	44
RL29	Clay Artisan Oak	44
RL30	Dove Artisan Oak	44
RL31	Golden Artisan Oak	44
RL32	Pale Artisan Oak	44
RL33	Grey Artisan Oak	44
RL34	Canvas Oak	39
RL35	Damask Oak	42
RL36	Merino Oak	42

Product code	Product name	Page no
RL37	Tweed Oak	42
RL38	Cotton Oak	42
RL39	Castle Hill Ash	40
RL40	Summerhouse Ash	40
RL41	Canterbury Ash	40
RL42	Tolsford Ash	40
RL46	Limed Silk Oak	40
RL47	Limed Linen Oak	40
RL48	Natural Oak	40
RPL-EW21	Reclaimed Chestnut	34
SBW-HC01	Dawn Oak	34
SBW-RL01	Spring Oak	34
SBW-RL12	Storm Oak	34
SM-RL20	Prairie Oak	36
SM-RL21	Glacier Oak	36
SM-RL22	Mountain Oak	36
SM-RL23	Savannah Oak	36
SM-RL24	Dune Oak	36
SM-RL26	Basque Oak	37
SM-RL27	Bellota Oak	37
SM-RL28	Serrano Oak	37
SM-RL29	Clay Artisan Oak	36
SM-RL30	Dove Artisan Oak	36
SM-RL31	Golden Artisan Oak	36

Art Select STONE



Product code	Product name	Page no
LM05	Melbourne Slate	50
LM06	Canberra Slate	50
LM22	Corris Slate	50
LM30	Ionic Marble	48
LM31	Corinthian Marble	48
LM32	Doric Marble	48
LM33	Calacatta d'Oro	51
LM34	Black Onyx	51
LM35	Pearl Onyx	51
LM36	Rose Onyx	51
LM37	Silk Travertino	51
LM38	Champagne Travertino	51
LM39	Caliza Classico	51
LM40	Pavimento Crema	51
LM41	Pavimento Grigio	52
LM42	Pavimento Bianco	52
LM43	Brezza Ceppo	52
LM44	Sabbia Ceppo	52
LM45	Naturale Ceppo	52
LM46	Cambric Stone	50
LM47	Brenner Quartzite	50
LM48	Verona Quartzite	50
LM49	Lago Quartzite	50

PRODUCT INDEX

GLUEDOWN

Van Gogh WOOD



Product code	Product name		Page no
PAN-VGW145T	Cocoa Apres Oak	New	58
PAN-VGW146T	Sable Apres Oak	New	58
PAN-VGW147T	Honey Apres Oak	New	58
SM-VGW81T	Country Oak	New	60
SM-VGW85T	French Oak	New	60
SM-VGW86T	Classic Oak	New	60
SM-VGW115T	Natural Prime Oak	New	60
SM-VGW120T	Grey Brushed Oak		64
SM-VGW121T	Warm Brushed Oak		64
SM-VGW122T	Golden Brushed Oak		64
SM-VGW126T	Neutral Brushed Oak		64
SM-VGW145T	Cocoa Apres Oak	New	62
SM-VGW146T	Sable Apres Oak	New	62
SM-VGW147T	Honey Apres Oak	New	62
SM-VGW148T	Indy Urban Elm	New	62
SM-VGW149T	Linen Prime Oak	New	62
SM-VGW150T	Truffle Prime Oak	New	62
SM-VGW8105	Texas White Ash		64
SM-VGW8110	Antique French Oak		63
SM-VGW8116	Canadian Urban Oak		64
SM-VGW8117	Canadian Nude Oak		63
SM-VGW8237	Glenmore Oak		63
SM-VGW8239	Texas Grey Ash		64
SM-VGW8240	Croftmore Oak		63
SM-VGW8241	Hayfield Oak		63
VGW52T	Auckland Oak		66
VGW53T	Wellington Oak		66
VGW70T	Smoked Oak		66
VGW80T	White Washed Oak		66
VGW81T	Country Oak		66
VGW82T	Distressed Oak		66
VGW85T	French Oak		66
VGW86T	Classic Oak		66
VGW87T	Walnut		67
VGW89T	Ebony		67

Product code	Product name		Page no
VGW93T	Hessian Oak		67
VGW94T	Honey Oak		67
VGW113T	Cool Grey Oak		67
VGW115T	Natural Prime Oak		67
VGW120T	Grey Brushed Oak		70
VGW121T	Warm Brushed Oak		70
VGW122T	Golden Brushed Oak		70
VGW123T	Salvaged Barnwood		70
VGW126T	Neutral Brushed Oak		70
VGW145T	Cocoa Apres Oak	New	68
VGW146T	Sable Apres Oak	New	68
VGW147T	Honey Apres Oak	New	68
VGW148T	Indy Urban Elm	New	68
VGW149T	Linen Prime Oak	New	68
VGW150T	Truffle Prime Oak	New	68
VGW8101	Baltic Washed Oak		70
VGW8103	Warm Ash		71
VGW8105	Texas White Ash		71
VGW8110	Antique French Oak		71
VGW8111	Baltic Limed Oak		71
VGW8112	Baltic Mistral Oak		71
VGW8115	English Character Oak		71
VGW8116	Canadian Urban Oak		71
VGW8117	Canadian Nude Oak		71
VGW8237	Glenmore Oak		72
VGW8239	Texas Grey Ash		72
VGW8240	Croftmore Oak		72
VGW8241	Hayfield Oak		72

GLUEDOWN

Van Gogh STONE



Product code	Product name	Page no
VGT2401	Frosted Stone	76
VGT2405	Cotswold Stone	76
VGT2406	Volcanic Black	76
VGT2410	Pebble Grey	76
VGT2413	Palazzo Marble	76
VGT2420	Milanese Slate	76
VGT2422	Roman Slate	77
VGT2423	Venetian Slate	77
VGT3018	Tortora Breccia Marble	77
VGT3019	Grigio Breccia Marble	77
VGT3021	Bianco Breccia Marble	77

PRODUCT INDEX

GLUEDOWN

Opus WOOD



Product code	Product name		Page no
SM-WP437-SR	Niveus ●	New	86
SM-WP441-SR	Metsu Oak ●	New	86
SM-WP442-SR	Leyster Oak	New	86
SM-WP443-SR	Vermeer Oak	New	86
SM-WP445-SR	Geneva Oak ●	New	86
WP414-SR	Argen ●	New	82
WP435-SR	Grano ●	New	82
WP436-SR	Ignea ●	New	82
WP437-SR	Niveus ●	New	82
WP438-SR	Magna ●	New	82
WP439-SR	Columba ●	New	82
WP440-SR	Avena ●	New	84
WP441-SR	Metsu Oak ●	New	84
WP442-SR	Leyster Oak	New	84
WP443-SR	Vermeer Oak	New	84
WP444-SR	Barolo Oak ●	New	84
WP445-SR	Geneva Oak ●	New	84

Opus STONE



Product code	Product name		Page no
SP111-SR	Luna ●	New	90
SP115-SR	Nero ●	New	90
SP119-SR	Dolce	New	90
SP120-SR	Pleta	New	90
SP121-SR	Dalmata	New	90
SP122-SR	Salute Blanco	New	90
SP123-SR	Oscuro Terrazzo ●	New	91
SP124-SR	Platino Terrazzo ●	New	91
SP211-SR	Mico ●	New	91
SP213-SR	Urbus ●	New	91
SP216-SR	Fumo ●	New	91
SP812-SR	Pamplona ●	New	92
SP813-SR	Valencia ●	New	92
SP816-SR	Sillano Marble	New	92

dsdc
Dementia Design Accredited Product

● - DSDC accredited product.

GLUEDOWN

Knight Tile WOOD



Product code	Product name	Page no
CH-KP95	Rose Washed Oak	98
CH-KP99	Lime Washed Oak	98
CH-KP156	Grey Washed Oak	98
KP94	Pale Limed Oak	100
KP95	Rose Washed Oak	100
KP96	Mid Limed Oak	100
KP97	Classic Limed Oak	100
KP98	Aged Oak	100
KP99	Lime Washed Oak	100
KP103	Mid Worn Oak	101
KP138	Grey Limed Oak	101
KP144	Washed Character Oak	101
KP145	Natural Character Oak	102
KP146	Traditional Character Oak	102
KP147	Coastline Oak	102
KP148	Quayside Oak	102
KP151	Natural Studio Oak	102
KP152	Grey Studio Oak	102
KP153	Nordic Limed Oak	104
KP154	Dutch Limed Oak	104
KP155	Honey Limed Oak	104
KP159	Norfolk Acacia	104
KP160	Wells Acacia	108
KP161	Duxbury Acacia	108
KP163	Russet Character Oak	105
KP164	Nutmeg Limed Oak	105
KP165	Cocoa Limed Oak	105
SM-KP94	Pale Limed Oak	106
SM-KP95	Rose Washed Oak	106
SM-KP99	Lime Washed Oak	106
SM-KP138	Grey Limed Oak	106
SM-KP144	Washed Character Oak	106
SM-KP146	Traditional Character Oak	108
SM-KP154	Dutch Limed Oak	108
SM-KP155	Honey Limed Oak	108
SM-KP160	Wells Acacia	108
SM-KP161	Duxbury Acacia	108
SM-KP164	Nutmeg Limed Oak	108
SM-KP165	Cocoa Limed Oak	108



Product code	Product name		Page no
KP94-QT	Pale Limed Oak	New	123
KP99-QT	Lime Washed Oak	New	123
KP138-QT	Grey Limed Oak	New	123
KP154-QT	Dutch Limed Oak	New	123
KP163-QT	Russet Character Oak	New	123

PRODUCT INDEX

GLUEDOWN

Knight Tile STONE



Product code	Product name		Page no
ST12	Bath Stone		114
ST13	Portland Stone		114
ST14	Cumbrian Stone		114
ST15	Black Riven Slate		114
ST16	Grey Riven Slate		114
ST17	Honed Oyster Slate		114
ST18	Ivory Riven Slate		115
ST20	Honed Pebble Slate		115
ST21	Dove Grey Concrete		115
ST22	Smoked Concrete		115
ST26	Frosted Marble		116
ST29	Natural Stone		116
ST31	River Marble		116
ST32	Lunar Limestone		116
ST33	Natural Limestone		116
ST34	Empire Marble	New	112
ST35	Curio Terracotta	New	112
ST36	Curio Sage	New	112
ST37	Curio Navy	New	112
ST38	Curio Graphite	New	112

GLUEDOWN

Heritage Collection



Product code	Product name	Page no
CLIF-01	Clifton	128
CLIF-02	Clifton	128
CLIF-03	Clifton	128
CLIF-04	Clifton	128
LANS-01	Lansdown	130
LANS-02	Lansdown	130
LANS-03	Lansdown	130
LANS-04	Lansdown	130
MAYF-01	Mayfair	131
MAYF-02	Mayfair	131
MONT-01	Montpellier	126
MONT-02	Montpellier	126
MONT-03	Montpellier	126
MONT-04	Montpellier	126
MONT-05	Montpellier	127
MONT-06	Montpellier	127
MONT-07	Montpellier	134
MONT-08	Montpellier	127

Kaleidoscope



Product code	Product name	Page no
KAL01	Pyramid	138
KAL02	Cubix	138
KAL03	Cubix	138
KAL04	Pennon	138
KAL05	Half Pennon	138
KAL06	Apex	138
KAL07	Apex	139
KAL08	Hexa	139
KAL09	Hexa	139
KAL10	Tripoint	139
KAL11	Woven	139
KAL12	Woven	139
KAL13	Cubix	140
KAL14	Apex	140
SP219	Casablanca	140
SP220	Marrakesh	140

PRODUCT INDEX

RIGID CORE

Van Gogh WOOD



Product code	Product name	Page no
RKP8101	Baltic Washed Oak	164
RKP8105	Texas White Ash	164
RKP8110	Antique French Oak	164
RKP8111	Baltic Limed Oak	164
RKP8112	Baltic Mistral Oak	164
RKP8115	English Character Oak	164
RKP8116	Canadian Urban Oak	166
RKP8117	Canadian Nude Oak	166
SM-VGW121T-RKP	Warm Brushed Oak	162
SM-VGW122T-RKP	Golden Brushed Oak	162
SM-VGW8105-RKP	Texas White Ash	162
SM-VGW8116-RKP	Canadian Urban Oak	162
VGW121T-RKP	Warm Brushed Oak	166
VGW122T-RKP	Golden Brushed Oak	166

Van Gogh STONE



Product code	Product name	Page no
RKT2401	Frosted Stone	170
RKT2405	Cotswold Stone	170
RKT2406	Volcanic Black	170

RIGID CORE

Knight Tile WOOD



Product code	Product name	Page no
SCB-CH-KP95	Rose Washed Oak	179
SCB-CH-KP99	Lime Washed Oak	179
SCB-CH-KP156	Grey Washed Oak	179
SCB-KP94-6	Pale Limed Oak	176
SCB-KP95-6	Rose Washed Oak	176
SCB-KP99-6	Mid Limed Oak	176
SCB-KP138-6	Classic Limed Oak	176
SCB-KP144-6	Aged Oak	178
SCB-KP146-6	Lime Washed Oak	178
SCB-KP154-6	Mid Worn Oak	178

Knight Tile STONE



Product code	Product name	Page no
SCB-ST14-18	Cumbrian Stone	182
SCB-ST16-18	Grey Riven Slate	182
SCB-ST18-18	Ivory Riven Slate	182
SCB-ST20-18	Honed Pebble Slate	182
SCB-ST21-18	Dove Grey Concrete	182
SCB-ST26-18	Frosted Marble	182

PRODUCT INDEX

RIGID CORE

Korlok Regent WOOD



Product code	Product name	Page no
CL-RKP9001	Stanmore Oak	192
CL-RKP9002	Greenwich Oak	192
CL-RKP9003	Primrose Oak	192
CL-RKP9004	Kensington Oak	192
CL-RKP9005	Victoria Oak	192
CL-RKP9006	Richmond Oak	192
CP-RKP9001	Stanmore Oak	191
CP-RKP9002	Greenwich Oak	191
CP-RKP9003	Primrose Oak	191
CP-RKP9004	Kensington Oak	191
CP-RKP9005	Victoria Oak	191
CP-RKP9006	Richmond Oak	191
RKP9001	Stanmore Oak	188
RKP9002	Greenwich Oak	188
RKP9003	Primrose Oak	188
RKP9004	Kensington Oak	188
RKP9005	Victoria Oak	188
RKP9006	Richmond Oak	188
SM-RKP9001	Stanmore Oak	190
SM-RKP9002	Greenwich Oak	190
SM-RKP9003	Primrose Oak	190
SM-RKP9004	Kensington Oak	190
SM-RKP9005	Victoria Oak	190
SM-RKP9006	Richmond Oak	190

LOOSE LAY

Karndean LooseLay WOOD



Product code	Product name	Page no
LLP92	Country Oak	204
LLP95	Ashland	204
LLP99	Hudson	204
LLP102	Heritage Oak	204
LLP105	Vintage Timber	204
LLP106	Antique Timber	204
LLP108	Providence	205
LLP112	Hartford	205
LLP113	Cambridge	205
LLP301	Twilight Oak	202
LLP306	Pearl Oak	202
LLP307	Neutral Oak	202
LLP308	French Grey Oak	202
LLP310	Champagne Oak	202
LLP315	Character Walnut	202
LLP317	Lemon Spotted Gum	202

Karndean LooseLay STONE



Product code	Product name	Page no
LG-LLT201	Colorado	209
LG-LLT219	Quebec	209
LLT200	Arizona	208
LLT201	Colorado	208
LLT202	Indiana	208
LLT203	Madison	208
LLT214	Seattle	208
LLT216	Utah	209
LLT219	Quebec	209

Colour and Pattern Reproduction

Whilst every care has been taken in the printing of this Product Guide, the colours shown are only as accurate as the printing process will allow.

The policy of the company is one of continuous development and improvement. We reserve the right to add or delete products from the range or to change patterns and/or textures without prior notification.

Calls may be recorded for training purposes.

Karndean International owns copyright and protection on all designs.

All product information is correct at time of print, April 2026. For more information, visit our website: www.karndeancommercial.com

Karndean Designflooring and the Karndean Designflooring logo are trademarks of Karndean International Ltd.

Registered in England No. 01612506. Registered office: Crab Apple Way, Vale Park, Evesham, Worcestershire, WR11 1GP. VAT No. 918 3850 05. © Karndean International 2026

Karndean

t. 01386 820104 **karndeancommercial.com**

Karndean Designflooring Crab Apple Way,
Vale Park Evesham, Worcestershire WR11 1GP

Customer Finance
Tel: 01386 820200 Opt. 5
Fax: 01386 820199
Email: customerfinance@karndean.co.uk

Technical Services
Tel: 01386 820200 Opt. 6
Fax: 01386 820196
Email: technical@karndean.co.uk

Training Centre
Tel: 01386 820170
Fax: 01386 820198
Email: training@karndean.co.uk

Commercial Sales Office
Tel: 01386 820200 Opt. 2
Fax: 01386 820183
Email: commercial@karndean.co.uk

Sales Office opening hours
Monday - Friday 08:00 - 17:30
Weekends and Bank Holidays closed
- This applies to Retail, Trade and Commercial Sales Team

Clerkenwell Showroom
Email:
clerkenwellshowroom@karndean.co.uk
Address:
20 Clerkenwell Green,
Clerkenwell, London,
England EC1R 0DP

Chelsea Harbour Showroom
Email:
chelseaharbour@karndean.co.uk
Address:
Unit 307, Design Centre East,
Chelsea Harbour Drive, Lots Rd,
London SW10 0XE

Material Source Studio
Manchester Studio address:
1 Federation Street, NOMA,
Manchester, England, M4 4BF
Glasgow Studio address:
180 West Saint George Street,
Glasgow, Scotland, G2 2NR

Republic of Ireland

Tel:	0165 69 887
Commercial:	Opt.2
Customer Finance:	Opt.5
Technical Services:	Opt.6
Trade Sales Team:	Opt.3

Karndean Designflooring

Karndean Designflooring - Commercial
Call: 0044 (0)1386 820104
Email commercial@karndean.co.uk
For ROI call: 01 6569887

ISSUE 3.1 | 10/26 | KD9654UK | COMMPRODG3.1

Karndean Designflooring and the Karndean Designflooring logo are trademarks of Karndean International Ltd. Registered in England No. 01612506. VAT No. 918 3850 05.