

RESILIENT COMMERCIAL LVT FLOORING DESIGNED TO PERFORM

Stylish design and commercial-grade performance

Inspired by wood and stone from across the globe, our premium LVT is available in hundreds of unique designs and three versatile installation formats—loose lay, rigid core hybrid, and gluedown. Backed by warranties of up to 20 years in commercial settings, our LVT combines style, durability, and high performance, making it the preferred choice in a range of sectors, including multi-res, senior living, aged care, modular homes, social housing, retail, offices, hospitality and healthcare.

Design is an en Karndean Evol Why Karndean Sectors

Form & functio Installation for

Our LVT floorin Commercial de

Design & produ

Wood at a glan Stone at a glan Karndean Loos Karndean Loos Korlok Van Gogh (dua Knight Tile (dua Opus Art Select

Resources & su Digital tool suit

Technical hub Quality and ser

CONTENTS

| ndless journey | 4 |
|------------------|----|
| ve® | 6 |
| Commercial? | 14 |
| | 16 |
| n | 23 |
| mats | 24 |
| ig ranges | 26 |
| esign techniques | 28 |
| uct collections | 35 |
| nce | 36 |
| ice | 40 |
| seLay Longboard | 44 |
| seLay Originals | 48 |
| | 52 |
| al format) | 58 |
| al format) | 62 |
| | 66 |
| | 72 |
| ıpport | 77 |
| е | 78 |
| | 80 |
| rvice | 82 |
| | |

DESIGN IS AN

Design, in its truest sense. Encompassing broader contextual factors - nature, innovation, and human-centricity as part of Karndean's quest, a family owned business, to make a positive impact on both people and planet.

ENDLESS

Reaffirms both our path and yours toward mastery. Highlights our global exploration and ongoing reinvention. Beginning from a family home on the doorstep of the Cotswolds. Reflecting our unwavering commitment to the design process since 1973.



JOURNEY

Providing a sense of possibility, where everything is connected. Reflecting our diverse and ever-growing product range and the relentless efforts of our product designers. Available across North America, Australasia, Europe and the UK.

KARNDEAN EVOLVE® OUR PROMISE OF A BETTER TOMORROW.

It's a continuing journey, and there are no shortcuts. But we know now is the time for everyone to begin taking bigger steps. Ours is a promise to think differently, act decisively, and create real change.

It's a promise to Evolve.

Five decades ago, our family-owned business was founded on innovation, bold action and a pioneering spirit. Fifty years later, those same ideals guide us forward. Because the future demands change.

It's time to create a better tomorrow.



www.karndeancommercial.com/evolve



IT'S A NEW DAY AND WF'RF READY TO CREATE A BETTER TOMORROW

It's a promise to Evolve.

Karndean are proud recipients of the Best Vinyl Flooring Company - Australia in both the 2023 and 2024 BUILD Sustainability Building Awards. The award recognises innovators who are driving sustainability in the building and construction space.

karndeancommercial.com/evolve



The Anti-Greenwash Charter, we are dedicated to upholding its standards in all our sustainability



communications. If you have any feedback or concerns, please review our escalation procedure in our Green Claims Policy.

Every Karndean range and format meets our certification policy standards – be sure to verify the current certification stat



Confront climate change

- The Science Based Targets initiative (SBTi), an international corporate climate-action organisation, has approved our targets for greenhouse gas emissions reductions, validating that our near-term targets are aligned with the reductions necessary to prevent catastrophic global warming: We are committed to reducing absolute Scope 1 and Scope 2 emissions 42% by 2030.
- Karndean provides Environmental Product Declarations (EPDs) for all products (hosted by SCS Global Services), verified to ISO 14025 standards, offering clear insights into the environmental life cycle.
- GreenTag[™] Excellence Our gluedown, Korlok, LooseLay Originals, and LooseLay Longboard ranges receive a GreenRate Level 'A' rating for quality sustainable building materials. Additionally, we were the first Australian LVT supplier to achieve Best Environmental Practice PVC in 2015.

200

Inclusion & diversity

- We deeply value equity, inclusivity and diversity within our company and nurture these principles through engagement and education.
- These values guide our policies on environmental protection, responsible sourcing/trading, and our contributions to local and global communities, reflecting our founder's enduring principles and ethics

that continue to shape our

Health & wellbeing

- Our products go beyond aesthetics; they are designed with wellbeing in mind. They are not only free from heavy metals and unsafe phthalates, but are also certified for post-installation indoor air quality. Our commitment to creating healthy interior environments extends to our choice of water-based or solvent-free adhesives, ensuring very low VOC emissions. Your health and comfort are integral to our product design.
- All our gluedown, LooseLay Originals, and LooseLay Longboard ranges have a GreenRate™ LCARate Silver certification, recognising commitment to safeguarding the planet's biodiversity, ensuring the wellbeing of workers, and maintaining environmentally friendly manufacturing processes.

P

Supply chain transparency

- We're committed to upholding high standards of environmental and social responsibility, ensuring fair treatment and safe working conditions for all.
- Our factories lead the way by using recycled materials and eco-friendly packaging, setting a new standard for environmental consciousness.
- Plus, our manufacturing processes are certified to meet ISO 14001 and ISO 9001 standards, warranting top-notch quality and sustainability every step of the way.





Sustainable use of resources

- At the core of our dedication to responsible resource management lies our commitment to preserving natural resources. We achieve this by embracing recycled materials and creating products specifically designed for recyclability, thus reducing our dependence on raw materials derived from crude oil.
- We prioritise the incorporation of recycled materials . in our products, with each one containing up to 50% recycled PVC in their backing layers, sourced from post-production waste.
- We substantiate our efforts to minimise landfill waste and foster recycling initiatives, strengthening our role in promoting a circular economy.

 Θ

Education

- We educate employees about the importance of sustainability, helping them understand what role they play, encouraging them to think sustainably and devise new ways of working, increasing the likelihood of achieving our goals.
- By conducting CPD classes and participating in speaking engagements with organisations like the Green Building Council of Australia, a membership we've held since 2007, we actively contribute to the training of professionals in the design, construction, and built industries.




Discover Karndean **Evolve**®

INSPIRED BY NATURE, PERFECTED FOR DESIGN

At Karndean, we believe the best designs begin with nature. Our journey starts in forests, quarries, and landscapes where the most stunning natural materials are found. From the intricate grain of aged timber to the organic movement of stone shaped by time, every Karndean floor is rooted in these raw, authentic origins.

Our design team travels the world, sourcing unique wood species and distinctive stone formations to capture their character in high-definition detail. Each plank and tile tells a story - whether it's the rich patina of reclaimed oak, or graining of spotted gum, the delicate veining of marble, or the rugged texture of slate. These natural inspirations serve as the foundation for our meticulously crafted flooring, ensuring every Karndean design reflects the depth and beauty of real materials.

But nature isn't just our muse - it's our benchmark.

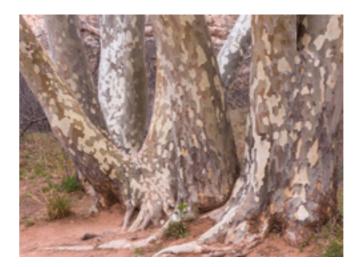

Australian Species

Australian woods have long been celebrated for their strength and versatility. Today, Spotted Gum and Blackbutt are equally prized for their distinctive character. Shaped by some of the world's harshest conditions, including droughts, bushfires, and searing summer heat, their unique wood grains, colours, and tones are extraordinary.



Marble

Marble is celebrated worldwide for its timeless elegance and natural beauty. Originating from the mountains of Italy, it has long been prized for its rarity and refinement favoured even by Michelangelo for its sculptural potential. Our marble-inspired designs honour this iconic stone, capturing its graceful veining and luxurious feel while offering the everyday practicality of modern flooring.



Limestone

This ancient rock is widely exposed over large regions around the globe, forming karst landscapes as it erodes. Limestone as a flooring material can be traced back thousands of years. Our designers have captured the modern allure of limestone, providing a subtle yet stylish solution to introduce contemporary sophistication into any interior.



Oak

Our designers have perfectly captured their subtle beauty, with open-grain patterns, delicate medullary rays, distinctive growth rings, and natural colour variations. From neutral timber looks to cooler, limed contemporary tones, we bring new character to these designs while highlighting their natural elegance.





White Ash

White Ash, native to North America, is celebrated for its attractive straight grain, occasionally accented with hints of a flowery pattern. The wood maintains consistent natural variation. This distinctive quality, combined with its subtle yet striking grain, makes White Ash a favoured choice for elegant and refined interiors.

REPLICATION OF NATURAL BEAUTY, THE DIFFERENCE IS IN THE DETAIL


At Karndean, we do things differently. Every plank and tile is meticulously crafted to mimic the organic variation found in real wood and stone. No harsh repetition, no obvious clones - just beautifully authentic design that feels effortlessly real. We take a sophisticated approach. Our designers study natural materials in microscopic detail, replicating organic movement, subtle grain shifts, and unique textural nuances across each plank or tile. This isn't a formulaic approach - it's artistry, ensuring Karndean floors achieve the depth, unpredictability, and visual integrity required for high-end design projects.

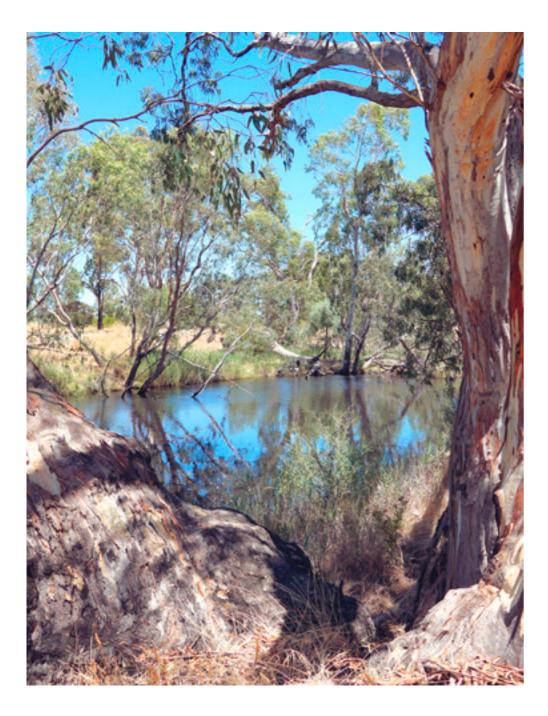

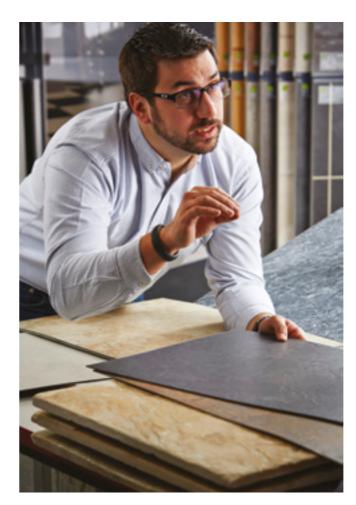

"Karndean designs are inspired and sourced by natural materials, carefully scanned and printed onto a photographic layer, and enhanced with an emboss layer for authentic texture. Due to the way our products are manufactured, the placement and repetition of natural details will vary across planks, ensuring a more natural and less uniform appearance." – Karndean Product Designer



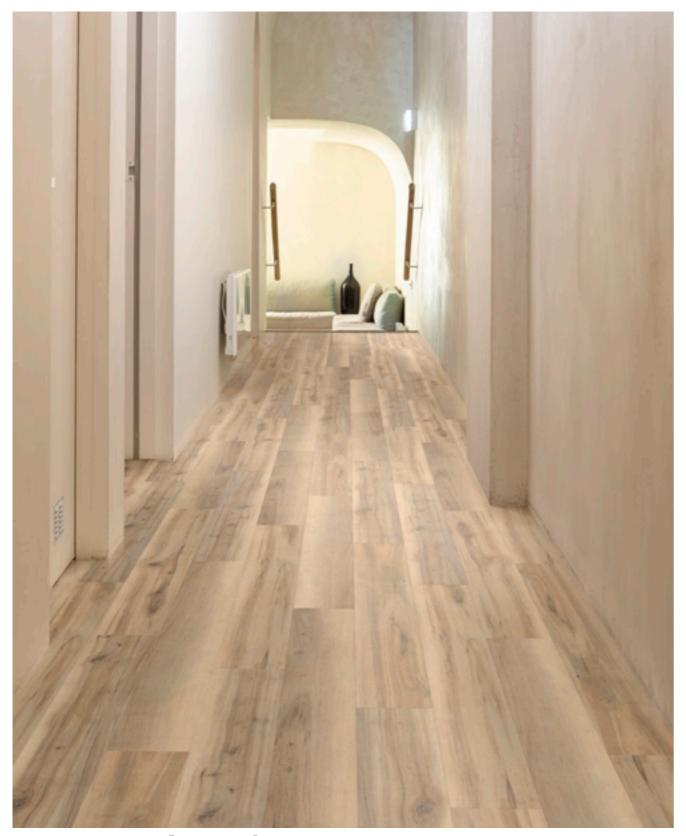



Korlok: Tortora Breccia Marble **RKT3018** 🐵


Van Gogh: Natural Maple VGW127T 🛲 | SCB-VGW127T 🚱

WHY KARNDEAN COMMERCIAL?

Inspired by wood and stone from around the world.

Our premium resilient LVT is available in hundreds of stylish designs and three versatile installation formats – loose lay, hybrid rigid core, and gluedown. With warranties of up to 20 years in commercial settings, the combination of style, durability, and performance makes our LVT a popular choice across key sectors, including healthcare, aged care, multi-residential developments, community housing, leisure, new home builds and renovations, education, child care, hospitality, and corporate offices.

Alongside exceptional customer service and unmatched quality, specifying Karndean ensures you benefit from a proven track record in commercial applications, successful project outcomes, and long-standing relationships with satisfied customers, making us a preferred supplier in the industry.

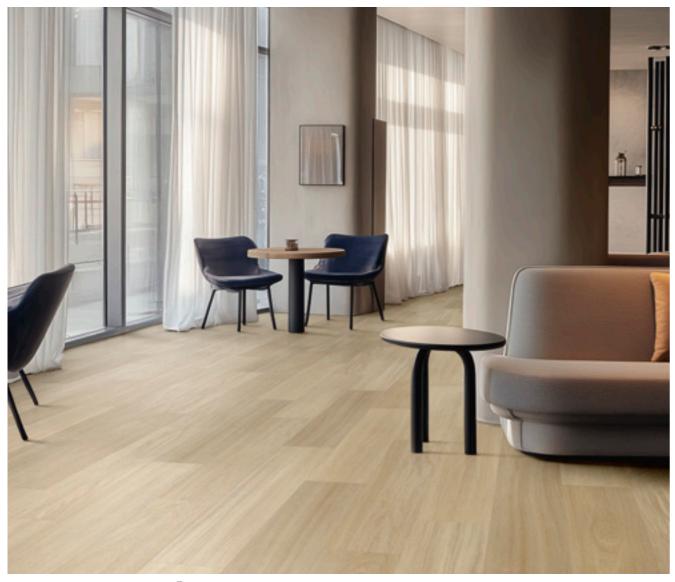

Opus: Geneva Oak WP431 | WP431-SR 🛲

Ø

K-Guard+®

We use K-Guard+® surface technology for scuff and stain resistance ensuring there is no need to apply an additional surface treatment following installation.

Realistic designs

Each and every one is original, meticulously crafted by our expert design team to capture the distinctive grains, textures and markings of hand-selected wood and stone.



Durable

Unlike other flooring alternatives, Karndean gives you the look and feel of natural products but with the durability and resilience of luxury vinyl.

hardwoods, our floors are impervious to water and will not swell, crack or warp when wet, making them perfect for kitchens,

Water resistant*



Warranty

All Karndean floors come with a commercial warranty of up to 20 years, depending on the product range specified.



Our floors don't hold dust, dirt, pollen or other allergens. Our cleaning products also kill 99.9% of germs.



Compatible with underfloor heating For added warmth, our flooring is perfectly suitable for underfloor



Low maintenance

heating systems up to 27°C.

maintenance regime is simple and can be carried out by hand or using a mechanical cleaning apparatus. With Karndean, you don't have to worry about any sanding, refinishing, staining or varnishing either.

*It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area



Tailored to your project

Providing the freedom to design without limits. With gluedown, loose lay, and rigid core formats available across our ranges, you can specify the format that suits your project's technical needs - while still achieving the exact aesthetic you want.



Acoustic qualities

Karndean Designflooring is quieter underfoot compared to most hard flooring alternatives. Our loose lay and rigid core products come with a backing that reduces noise transfer to rooms below, making it ideal for apartment blocks and any upstairs rooms.



Versatile installation options


Select from gluedown or rigid core formats in our dual-format designs – giving you the power to maintain design consistency while choosing the installation method best suited to each space. It's design continuity without compromise.



Enhanced safety

Working in demanding environments that have been assessed as having a very high slip risk can be dangerous without the right safety flooring.

Unlike laminate and engineered office and tea rooms.



SECTORS

Flooring to suit your commercial project

Social Housing


The housing sector now spans a diverse range of projects - from build-to-rent and student accommodation to aged living, multi-residential complexes and new developments. Each of these requires thoughtful consideration when specifying interiors. Our dual format offering is perfectly suited for social housing specifications, providing both versatility and longevity. It allows you to prioritise design without compromising on functional performance, all backed by our reliable warranty.



Social Housing | Korlok: Pebble Grey RKT2410 🐵

Retail & Shop

The future of retail depends on creating memorable, in-person experiences - something online shopping can never fully replace. To support this, our versatile flooring collections offer both beauty and functionality, enabling effective zoning, wayfinding, and spatial definition. Designed to enhance the customer journey, our products help guide foot traffic intuitively while meeting key performance demands such as safety and durability. Available in both rigid core and loose lay formats, our floors are quick to install and ideal for minimising disruption in busy retail environments.

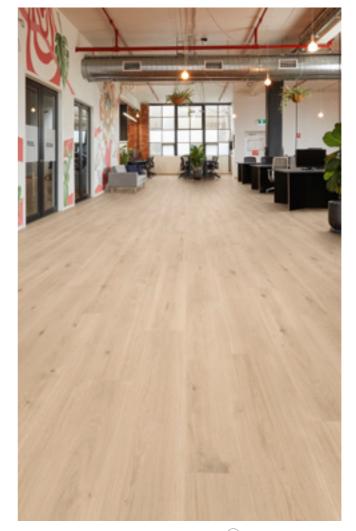

Office | LooseLay Longboard: Danish Oak LLP357



Retail & Shop | Opus: Steen Oak WP426 | WP426-SR 厥

Office

In today's post-pandemic world, office spaces are transforming into flexible, collaborative environments that offer a home-like atmosphere. To support this shift, flexibility and future-proofing are key. Our loose lay fitting format, backed by a 20-year warranty, ensures both durability and ease of installation, while allowing for seamless reconfiguration as needs evolve. Designed to foster a calm and comfortable setting, our LVT ranges mimic the beauty of natural materials, support a biophilic design ethos and deliver a quiet, soothing underfoot experience. Choose our loose lay tiles for a sleek, poured concrete look - no expansion gaps required - making them a popular choice for commercial spaces looking for style and functionality.




Hospitality & Leisure | Opus: Barolo WP429 | WP429-SR | Granada WP814 | WP814-SR 厥

Hospitality & Leisure

Outstanding design was always a hallmark of the hospitality and leisure sectors, but it's now more important than ever. As the industry evolves in this new era, so too must the customer experience - one that allows guests to relax, unwind, and indulge. When specifying Karndean, a strong sense of style, impeccable hygiene, and a flawless finish are guaranteed. Our loose lay, rigid core, and gluedown products offer a contemporary aesthetic, with slip ratings of up to R11/P4, acoustic benefits of up to 21dB, and fast installation, ensuring both functionality and elegance.

Multi-Res

These environments demand flooring that feels like home for residents while remaining low-maintenance for management and staff. Our rigid core and loose lay LVT help create quieter spaces in multi-story buildings, reducing noise transfer to lower floors by up to 21dB. Plus, all of our LVT is easy to clean and maintain no harsh chemicals, waxing, or noisy machinery required. Durability is paramount, too. With wear layer options up to 0.7mm, our flooring features K-Guard+[®] surface protection to withstand everyday wear, spills, and scuffs. Many of our ranges also offer the added benefit of being individually replaceable if damaged.

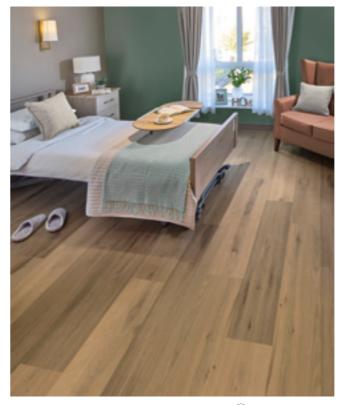

Healthcare | Opus: Vermeer Oak WP427 | WP427-SR 厥



Multi-Res | Korlok: Pale Loire Oak **RKP8245** 🚱

Healthcare

Interiors in the healthcare sector play a crucial role in the well-being of those using the space. While cleanliness and durability are paramount from a practical standpoint, the visual design is equally important in addressing the complex needs of patients and residents, contributing to a comforting and healing environment.

Our gluedown and loose lay ranges offer sustainable flooring solutions with exceptional design flexibility, durability for high-traffic areas, and comfort underfoot. With slip ratings of up to R11/P4, these ranges are ideal for healthcare applications.

Additionally, we provide Light Reflectance Values (LRV) for all our products, ensuring you can specify flooring that enhances accessibility and meets a wide range of requirements.

Education

Education settings are a hive of inspiration, where a balance of practicality and playful design is essential. Durable, resilient surfaces paired with vibrant colours and dynamic shapes create environments that inspire students to learn, engage, and succeed. Our gluedown and loose lay products provide complete design flexibility, fostering spaces that support learning, development, and, most importantly, creativity.



Education | LooseLay Originals: Colorado LLT201 🏼



Home Build | Opus: Rhine Oak WP432 | WP432-SR 厥

Aged Care & Senior Living

Creating safe, comfortable, and hygienic spaces is essential in aged care and senior living environments. Karndean Designflooring offers durable, low-maintenance flooring specifically designed for these settings, providing superior slip resistance and low VOC emissions.

Our LVT does not promote bacterial growth or harbour dust, and the materials used in our flooring are rigorously tested for safety. With Karndean floors, you can be confident in long-term performance and the well-being of residents.



Aged Care & Senior Living | Opus: Leyster Oak WP425 | WP425-SR () Pamplona SP812 | WP812-SR ()

Home Build

The residential sector spans a wide variety of projects, including new home constructions, renovations, refurbishments, and investment properties. Each of these projects presents unique challenges when it comes to selecting the right interior finishes.

Our flooring solutions strike the perfect balance between versatility and durability, offering dual-format options that cater to different needs. Choose from a range of designs that not only enhance the aesthetics of any space but also provide exceptional functional performance, all backed by our lifetime domestic warranty.



Scan to explore sector-specific solutions and real-world case studies on our website.

FORM & FUNCTION

We understand that every project is different. And as such, every flooring requirement is unique. To ensure you find exactly what you need, we offer our premium LVT in three installation formats across seven product collections, with each collection offering different specs from wear layer and product thickness to plank and tile sizes. Together, it all adds up to a range of options based on what's best for your project.

INSTALLATION FORMATS

Three LVT formats to suit your project's needs.

Loose lay

Loose lay features our K-Wave® friction grip and fibreglass-reinforced backing, providing a more dimensionally stable installation that's quick to install and easier to individually replace planks/tiles.

Ideal for newly constructed subfloors providing options that address costly subfloor preparation with a moisture management solution.



Rigid core

Our 2G^{\rm IM} and 5G^{\rm (8)} rigid core ranges are ideal for installations where acoustics, hiding subfloor imperfections or preservation of existing hard floors need to be considered. A click-locking mechanism allows for quick installation and the pre-attached backing eliminates the need for a separate underlayment.





Find out more





K-Guard+® Surface Protection

Clear PVC Embossed

Wear Layer


High Definition

Photographic Layer

Stability Layer

K-Wave® Friction

Grip Backing

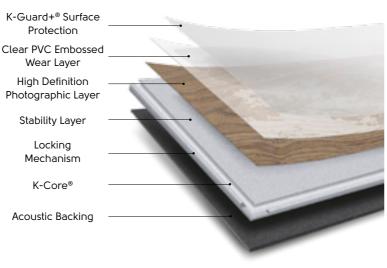

Loose lay benefits 🛛 💹



Quick and easy to install.



Easy access to underfloor panels.



Reduces impact sound transfer by 14dB.



With the use of Karndean PS adhesive, achieve up to 95% relative humidity (RH) and reduce costly moisture mitigation.*





Quick and easy to install. Hides subfloor imperfections.



Suitable for subfloors with elevated moisture found in some new builds and extensions.

(d))

Reduces impact sound transfer by 21dB.



 \otimes

No expansion

gap required.


Suitable for up to 95% relative humidity (RH) – helps reduce costly moisture mitigation.*

🥽 Gluedown

Our gluedown ranges offer our widest choice of colours and formats. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring.





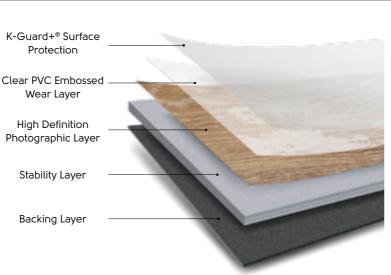

Gluedown benefits (7777)



Range of price points to suit different budgets.



Available in a wide range of designs, colours, textures and sizes.

Can be cut and laid for custom installations such as herringbone or zoning and wayfinding.

Ø

No expansion gap required.

Minimises disruption by installing over most hard subfloors.

6

2G™ and 5G® click-locking systems.

Enables preservation of existing floor.



*Scan to learn about flooring solutions up to 95% RH

OUR LVT FLOORING RANGES

Whatever it is you're after, you're sure to find a look that's right for you in our wide range of stylish, high quality Karndean floors.

| | Price range | | Size (mm) | Residential warranty | Light commercial warranty^* | Thickness (mm) | Wear layer (mm) | Bevelled edge | Natural emboss | Quantity per box | M² per box | M² per pallet | Weight per box (kg) | Domestic use | Commercial | Light commercial use | Enviromental Product Declaration available | Slip resistance^ |
|--------------------------------|----------------|-------------|-----------------|-------------------------|-----------------------------------|-------------------|-----------------------|------------------|-------------------|---------------------|------------------|------------------|---------------------------|-----------------|------------|----------------------------|---|---------------------|
| Loose lay | | | | | | | | | | | | | | | | | | |
| Karndean LooseLay Longboard | \$\$\$ | Plank | 1500.0 x 250.0 | 116-11 | 15 | 4.5 | 0.55 | No | Yes | 8 | 3.000 | 156.000 | 24 | 23 | 34 | 43 | \checkmark | R10, P2 |
| Karndean LooseLay | \$\$ | Plank | 1050.0 x 250.0 | Lifetime | 15 years | 4.5 | 0.55 | No | Yes | 12 | 3.150 | 151.200 | 23 | 23 | 34 | 43 | \checkmark | R10, P1/P2 |
| Originals | ŶŶ | Tile | 500.0 x 610.0 | | | | | No | Yes | 10 | 3.050 | 158.600 | 24 | 23 | 34 | 43 | \checkmark | R9, P2 |
| 🕾 Rigid core | ò | | | | | | | | | | | | | | | | | |
| | | Plank | 1420.0 x 225.0 | | | | | Micro | Yes | 10 | 3.195 | 166.140 | 26 | 23 | 33 | 42 | | |
| Korlok | \$\$\$ | T:1 - | 457.0 x 600.0 | Lifetime | 15 years | 6.5 | 0.55 | Micro | Yes | 10 | 2.742 | 142.584 | 21 | 23 | 33 | 42 | \checkmark | R10, P2 |
| | | Tile | 457.0 x 935.0 | | | | | Micro | Yes | 6 | 2.564 | 117.944 | 20 | 23 | 33 | 42 | | |
| Van Gogh | \$\$ | Plank | 1220.0 x 180.0 | Lifetime | 15 years | 5.5 | 0.55 | Micro | Yes | 10 | 2.196 | 120.780 | 20 | 23 | 33 | 42 | ~ | R10, P3 |
| Knight Tile | \$ | Plank | 1220.0 x 180.0 | - Lifetime | 10 years | 4.5 | 0.3 | No | Yes | 14 | 3.074 | 138.348 | 24 | 23 | 31 | 42 | - 🗸 | R10, P3 |
| Knight file | Ŧ | Tile | 304.8 x 457.2 | | | | | No | Yes | 20 | 2.787 | 117.058 | 22 | 23 | 33 | 42 | | R10, P4 |
| Gluedow | ٦ | | | | | | | | | | | | | | | | | |
| | | Oak Royale | 1219.2 x 177.8 | | | | | | Yes | 15 | 3.252 | 195.120 | 19 | 23 | 33 | 43 | | R9, P1 |
| Art Coloct | \$\$\$ | Oak Premier | - 914.4 x 152.4 | Lifetime | 20 years | 3.0 | 0.7 | Standard | Yes | 24 | 3.345 | 167.250 | 19 | 23 | 33 | 43 | \checkmark | R9, P2 |
| Art Select | ŶŶŶ | Handcrafted | 717.7 7 132.7 | | 20 years | 5.0 | 0.7 | Standard | Yes | 24 | 3.345 | 167.250 | 19 | 23 | 31 | 43 | | K7,12 |
| | | Parquet | 228.6 x 76.2 | | | | | | Yes | 192 | 3.345 | 180.630 | 16 | 23 | 31 | - | \checkmark | R9, P1 |
| Van Gogh | \$\$ | Plank | 1219.2 x 177.8 | Lifetime | 15 years | 3.0 | 0.55 | Micro | Yes | 15 | 3.252 | 195.096 | 19 | 23 | 33 | - | | R10, P2 |
| | | Plank | 1219.2 x 228.6 | | | | | | | 12 | 3.345 | 214.049 | 15 | 23 | 33 | - | | |
| Opus | \$\$ | Tile | 457.2 x 914.4 | Lifetime | 15 years | 2.5 | 0.55 | Micro | Yes | 8 | 5.545 | 185.806 | - 16 | 23 | 33 | - | | R9-R11/ P3-P4** |
| | | | 609.6 x 609.6 | | | | | | | 10 | 3.716 | 206.671 | | | | | | |
| Knight Tile | \$ | Plank | 1219.2 x 177.8 | Lifetime | 10 years | 2.0 | 0.3 | No | Yes | 20 | 4.335 | 260.129 | 16 | 23 | 33 | - | - 🗸 | R10, P2 |
| - Alight file | • | Tile | 304.8 x 457.2 | | | | | | | 24 | 3.345 | 240.805 | 12 | 23 | 31 | - | | R9, P3 |


* Warranties apply when used at EN 685 classification stated.

^ Subject to terms. Please see our website.

** Opus P4/R0-R11 rated designs feature an enhanced finish with a rougher surface texture, specifically designed for commercial environments requiring a high slip rating. These P4/R10-R11 rated designs, ending in '-SR,' are available by indent order. This means these designs are not stocked for immediate dispatch, and lead times are available upon request.


It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area.

ISO 10874 Classification




COMMERCIAL DESIGN TECHNIQUES

Flooring doesn't have to just be functional, the design can also work as a navigator, orchestrating the flow and harmony of a space. Discover how designers have cleverly used Karndean to create intuitive and delightful experiences.

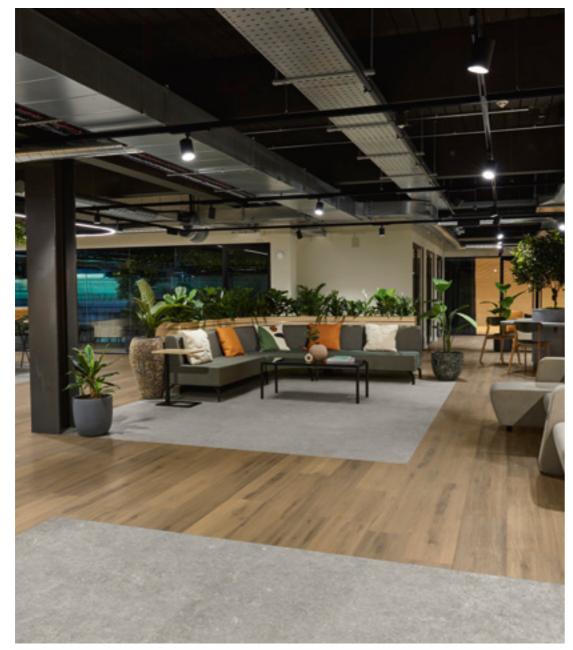


Office | Opus: Potter Oak WP428 | WP428-SR | Platino Terrazzo SP742 | SP742-SR

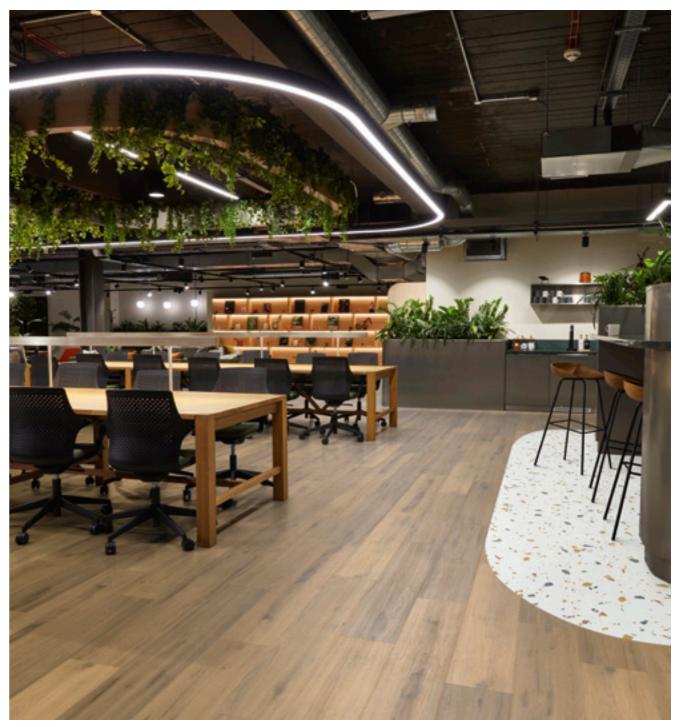

Co-working space | Opus: Vermeer Oak WP427 | WP427-SR | Salute Blanco SP743 | SP743-SR

Zoning

Our wide range of designs, patterns and textures can be used to zone a space, each with its own personality and purpose. Our Light Reflectance Values allow you to design zones with appropriate contrasts to meet accessibility requirements.

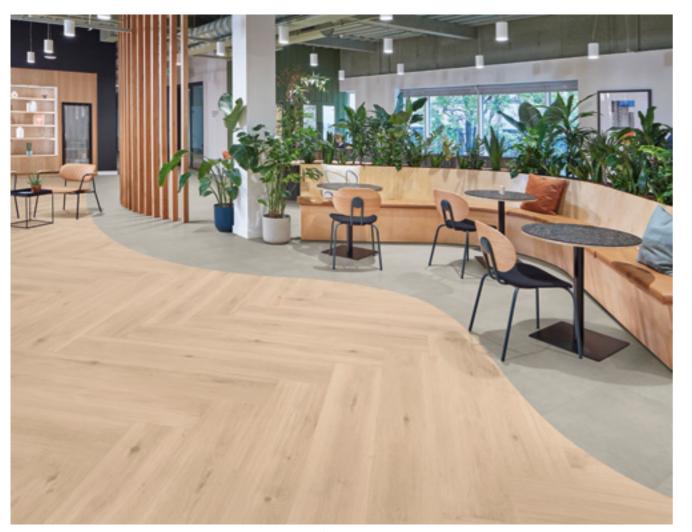

Hospitality & Leisure | LooseLay: Pure Danish Oak LLP357 | Quebec LLT219 ()

Wayfinding


Our flooring offers exceptional flexibility, allowing you to design spaces and pathways that enhance traffic flow. In retail environments, strategically placed paths guide customers through the space, helping to tell the brand's story and ensuring the customer experiences the space exactly as intended.

Blending

Elevate any space by seamlessly transitioning from one area to the next with a blend of designs. This technique allows you to refresh an existing floor without the need to replace every plank or tile. For a cohesive and striking look, choose planks or tiles from the same collection to ensure design harmony while creating a unique, standout feature.



Education | Opus: Potter Oak WP428 | WP428-SR Platino Terrazzo SP742 | SP742-SR

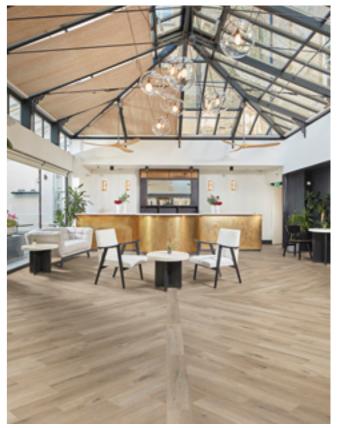

Hospitality & Leisure | Knight Tile: Washed Character Oak KP144-7 厥


LAYING PATTERNS ELEVATING COMMERCIAL SPACES

At Karndean, we believe a floor is more than just a surface - it's the foundation of great design.

Our luxury vinyl flooring offers a versatile selection of laying patterns, from timeless herringbone to striking chevron, enabling architects and designers to create unique, visually dynamic commercial spaces.

Laying patterns are central to Karndean's design philosophy. They elevate the aesthetic impact of our wood and stone looks while delivering practical benefits - from defining zones and aiding wayfinding to introducing a sense of movement. Whether you're crafting a bold feature or ensuring a cohesive flow across large-scale projects, our precision-engineered formats and extensive colour palette give you the tools to bring your vision to life.

Let's transform your next commercial project - one pattern at a time.

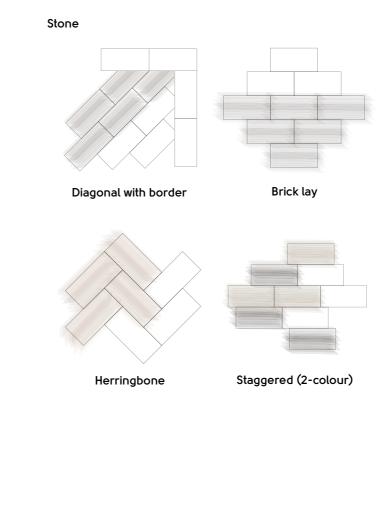


Herringbone

Basketweave


Wood



Double herringbone



Straight lay



Mixed



Staggered



Staggered stone with (wood and stone mix) wood border

It's not just the floor you choose - it's the direction you lay it that leaves a lasting impression. So, how do you decide which way to lay your floor? As you explore our three product formats, keep in mind the variety of pattern options available. Not every floor can be installed in every pattern, so consider both design and format compatibility when planning your layout.



Diagonal

DESIGN & PRODUCT COLLECTIONS

Explore our products 'at a glance'. Each has a story to tell and features to meet the needs of any project.

Be inspired by a world of colour, design, and laying patterns. Dive into technical details, from size and thickness to slip resistance, acoustic performance, and sustainability credentials.


Our wood and stone designs are inspired by materials sourced from across the globe from forest floors and timber yards to remote mountain quarries. In the skilled hands of our expert design team, these natural elements are recreated and refined with remarkable accuracy and attention to detail.

Light or dark. Cool, warm, or neutral. Choose from hundreds of colourways that showcase the authentic grains, textures, and markings of the original materials.

Every Karndean design is a true original - crafted with care, and ready to tell its own unique story.

WOOD AT A GLANCE

■ Karndean LooseLay Longboard | ■ Karndean LooseLay Originals | ■ Korlok | ■ Van Gogh | ■ Knight Tile | ■ Art Select | ■ Opus

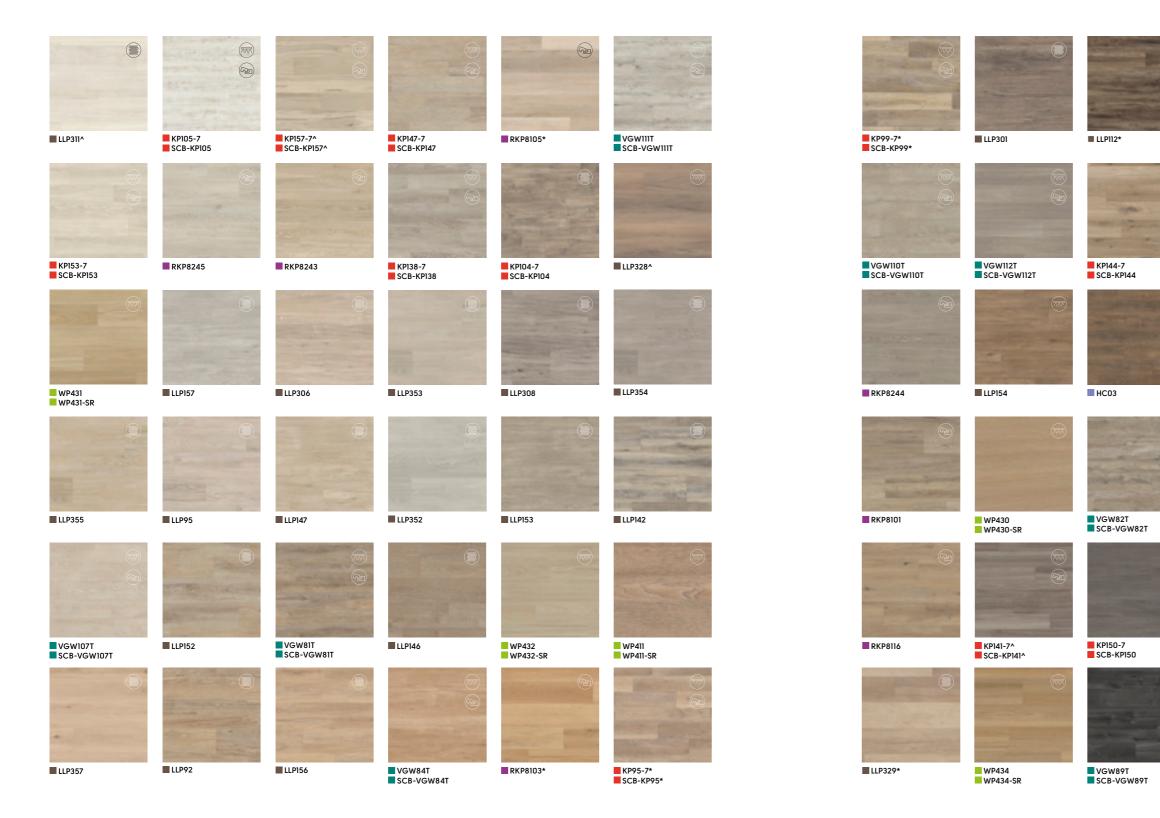

- * A feature of the design incorporates high colour variation between individual planks.
- ^ Australian wood species



WP428*



LLP148



VGW134T SCB-VGW134T



VGW128T SCB-VGW128T



AP03




HC06

WOOD AT A GLANCE

Continued...

■ Karndean LooseLay Originals | ■ Korlok | ■ Van Gogh | ■ Knight Tile | ■ Art Select | ■ Opus

= available in loose lay | () = available in rigid core | = available in gluedown

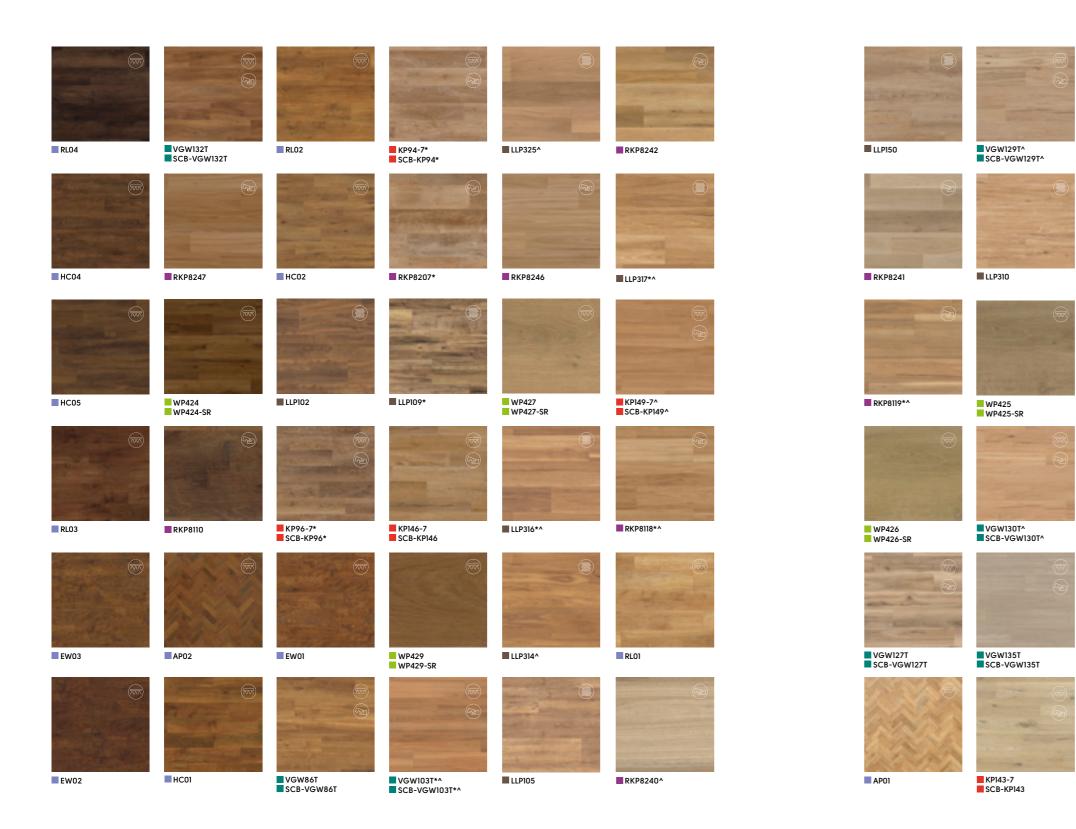

- * A feature of the design incorporates high colour variation between individual planks.
- ^ Australian wood species



VGW131T*^ SCB-VGW131T*^

VGW85T SCB-VGW85T

LLP113

LLP307

LLP313^

VGW133T SCB-VGW133T

LLP356



LLP108



LLP312^




RKP8239^



RKP8248

STONE AT A GLANCE


■ Karndean LooseLay Longboard | ■ Karndean LooseLay Originals | ■ Korlok | ■ Van Gogh | ■ Knight Tile | ■ Art Select | ■ Opus

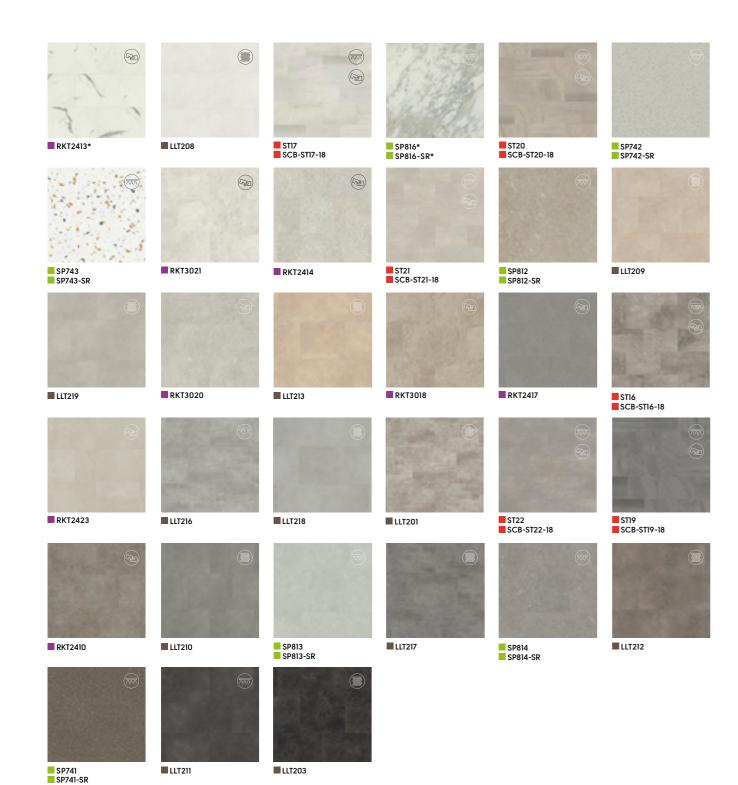



Korlok: Luna Breccia Marble RKT3020 💿

* A feature of the design incorporates high colour variation between individual planks.

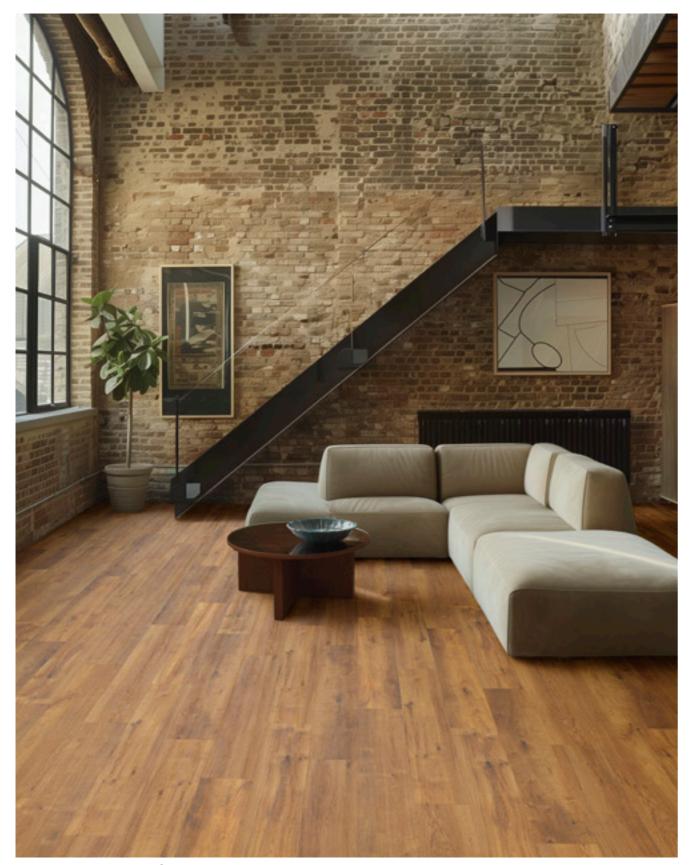

Van Gogh: Classic Oak VGW86T 🛲 | SCB-VGW86T 💿




KARNDEAN LOOSELAY LONGBOARD




Karndean LooseLay Longboard presents a striking collection of timber-inspired designs, showcasing both Australian and international wood species.

Our Australian range features the rich, earthy tones of Spotted Gum, the soft elegance of Blackbutt, the versatile charm of Tasmanian Oak, and the deep, rustic character of Ironbark. For a global touch, explore European and American classics such as European Oak, Danish Oak, and the ever-popular White Oak - each celebrated for its enduring beauty.

Combining sophisticated design, exceptional durability, and the natural appeal of real timber, LooseLay Longboard is the perfect choice to elevate any interior space.

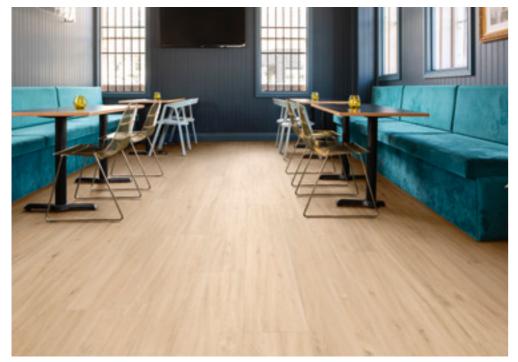

Field Oak LLP356

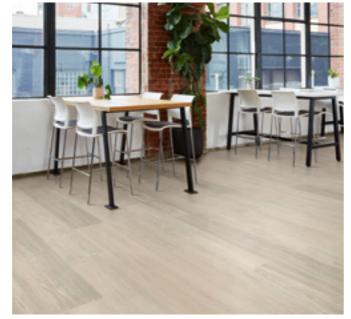

Cashmere Oak LLP353



Wheat Oak LLP355





Blended Ironbark LLP328

View the range


Enhance acoustic performance and design flexibility with Karndean LooseLay Longboard.


Featuring our innovative K-Wave® friction grip backing, LooseLay Longboard reduces noise transfer by up to 14dB - delivering a quieter, more comfortable environment that's perfect for both residential and high-traffic commercial settings.

Engineered for exceptional dimensional stability, it includes a fibreglass reinforcement layer that resists expansion and contraction, minimising movement and ensuring a secure, long-lasting installation. Additionally, LooseLay Longboard can be installed over subfloors with up to 95% relative humidity (adhesive dependent), helping to lower moisture mitigation costs while maintaining a high-performance, low-maintenance flooring solution.

AT A GLANCE

1500.0mm x 250.0mm (59.06" x 9.84")

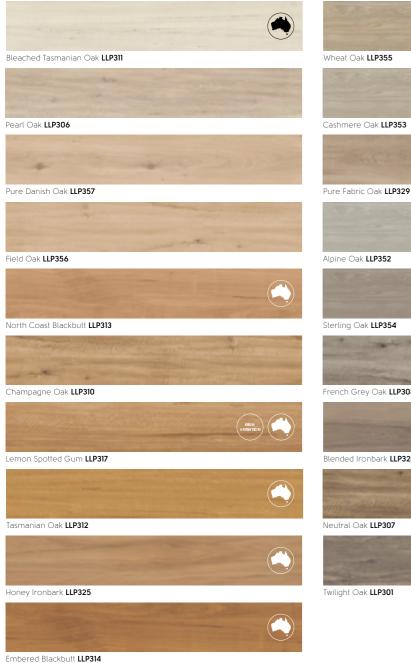

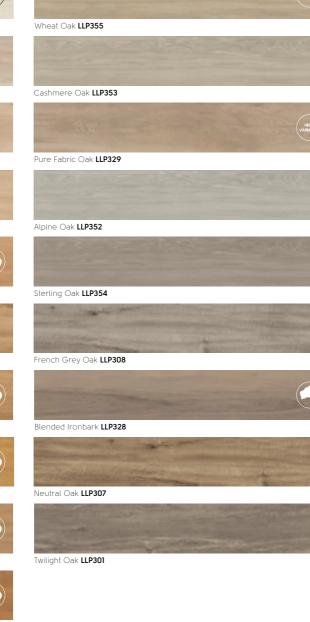





| | Standard | Result | | |
|-----------------------------------|---|--|--|--|
| Size | ISO 24342 | 1500.0 mm x 250.0 mm | | |
| Thickness | ISO 24346 | 4.5 mm | | |
| Wearlayer | ISO 24340 | 0.55 mm | | |
| Surface treatment | | K-Guard+® PU coating | | |
| Backing | | PVC Friction Pad | | |
| Mana at 1 | Commercial | 15 years wear | | |
| Warranty ¹ | Residential | Lifetime wear | | |
| Bevelled edge | | No | | |
| Standards | ISO 10582 | Pass | | |
| | ISO 10874 - Commercial | 33: Commercial heavy | | |
| Classification | ISO 10874 - Domestic | 23: Domestic heavy | | |
| Reaction to fire | AC/NIZC ICO 0220 1-2002 | CRF: 8.3 kW/m ² | | |
| Reaction to life | AS/NZS ISO 9239.1:2003 | Smoke Value: 143% min | | |
| Staining resistance | EN ISO 26987 | Excellent | | |
| Light fastness | ISO 105-B02 | Pass (≥ 7) | | |
| Abrasion resistance | ISO 10582 | Туре 1 | | |
| Flexibility | ISO 24344 | Pass | | |
| Dimensional stability | ISO 23999 | Pass (≤ 0.10%) | | |
| | ISO 140-8 Improved Impact Sound Insulation | $\triangle L_w = 14 \text{ dB}$ | | |
| | ASTM E492-09 Impact Insulation Class | IIC 56 dB | | |
| Acoustic impact noise reduction | Suitable for use on upper floors of residential high-rise apartment buildings without the need for a separate acoustic underlay under certain build specifications – precise details available from Karndean. | | | |
| | NCC 2016 F5.3 (a) result refers to MULTI Res specification including | Karndean INSUL Marshall Day Software report for your AAAC Star rating | | |
| Electrical behaviour body voltage | EN 1815 AATCC 134-1996 | Pass Pass | | |
| Indentation - residual | ISO 24343-1 | Pass (≤ 0.1 mm) | | |
| Castor chair continuous use | ISO 4918 | Pass | | |
| _ | 100 0000 | 0.0245 m²K/W | | |
| Thermal resistance | ISO 8302 | Suitable for underfloor heating. Max 27°C | | |
| Slip resistance ² | AS/NZS 4586:2013 | R10, P2 | | |
| Adhesive | Karndean Hi-Tack PS Adhesive whe | en applicable; please refer to our installation instruction | | |
| Recycling | | Suitable | | |
| Phthalate free | | Yes | | |

Subject to terms.
 Subject to terms.<



technical data



View EPD

Explore technical

Mountain Spotted Gum LLP315





resources & BIM assets



Get installation guidelines



Learn about adhesive options

KARNDEAN LOOSELAY ORIGINALS



The Karndean LooseLay Originals collection is inspired by the natural beauty of popular wood and stone species. Our wood designs reflect the timeless elegance of European Oak, the characterful texture of Rustic Oak, and the modern simplicity of Limed Oak - offering styles to suit any interior aesthetic. The stone designs authentically replicate natural surfaces, from the clean minimalism of Concrete and the refined luxury of Honed Limestone to the organic texture of Pietra, all available in a versatile, contemporary colour palette.

LooseLay Originals blends the beauty of nature with the comfort, durability, and practicality of luxury vinyl flooring.



Maine LLT213

Concrete




View the range



Nisida LLT210

Concrete

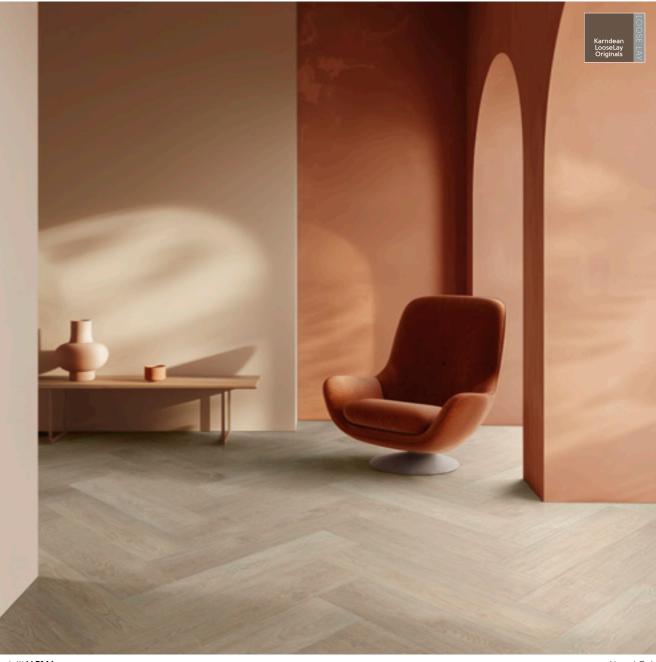

Budelli LLP146





Hamden LLP156

Character Oak

Limed Oak

Achieve outstanding acoustic performance and installation flexibility with Karndean LooseLay Originals.

Designed with innovative K-Wave® friction grip backing, this advanced flooring solution reduces noise transfer by up to 14dB - making it ideal for both residential and commercial spaces that require a quieter environment.

LooseLay Originals is engineered for long-term stability, featuring a fibreglass reinforcement layer that minimises expansion and contraction for a durable, dependable installation. Suitable for subfloors with up to 95% relative humidity (adhesive dependent), it provides a cost-effective approach to moisture management while offering a highperformance, low-maintenance finish.

AT A GLANCE

1050.0mm x 250.0mm (41.34" x 9.84")

| | - | | HEGH VASBUTION | | |
|---|---------------|----------------------------|-------------------|-----------------------|------------------|
| Hamden LLP156 | Character Oak | Stamford LLP109 | Rustic Oak | Bridgeport LLP157 | European Oak |
| and all and | carde - | and the second | | | - and the second |
| Levanzo LLP150 | Limed Oak | Danbury LLP154 | European Oak | Waterbury LLP152 | Limed Oak |
| and the second | - Tear | An adam | нон | | and services |
| Budelli LLP146 | Limed Oak | Hartford LLP112 | Rustic Oak | Brockton LLP153 | European Oak |
| | | Laboration and the | and the second | and the second second | |
| Providence LLP108 | White Oak | Heritage Oak LLP102 | Rustic Oak | Country Oak LLP92 | Character Oak |
| | | | | AT THE OWNER | the second state |
| Cambridge LLP113 | Rustic Oak | Lampione LLP147 | European Oak | Sicilia LLP142 | Character Oak |
| | | | | | - |
| Vintage Timber LLP105 | Rustic Oak | Ashland LLP95 | White Oak | Linosa LLP148 | European Oak |

500.0mm x 610.0mm (19.69" x 24.02")

| Capri LLT209 | Maine LLT213 | Dakota LLT212 | Tino LLT208 | |
|----------------------|--------------------|---|-----------------------|-----------------|
| | Charles of the | | | |
| Guebec LLT219 | Utah LLT216 | Ontario LLT218 | Colorado LLT201 | |
| Nisida LLT210 | Vermont LLT217 | Vulcano LLT211 | Madison LLT203 | |
| floor score | GOLD PROD | Clobal GreenTag orns Contain Base Australia Contractor Base Contractor | | ling stralia |

| | Standard | Result |
|-----------------------------------|---|---|
| Size | ISO 24342 | See page opposite |
| Thickness | ISO 24346 | 4.5 mm |
| Wear layer | ISO 24340 | 0.55 mm |
| Surface treatment | | K-Guard+® PU coating |
| Backing | | PVC Friction Pad |
| Warranty ¹ | Commercial Residential | 15 years wear Lifetime wear |
| Bevelled edge | | No |
| Standards | ISO 10582 | Pass |
| Classification | ISO 10874 - Commercial ISO 10874 - Domestic | 33: Commercial heavy 23: Domestic heavy |
| Reaction to fire | AS/NZS ISO 9239.1:2003 | CRF: 8.3 kW/m² Smoke Value: 143% min |
| Staining resistance | EN ISO 26987 | Excellent |
| Light fastness | ISO 105-B02 | Pass (≥ 7) |
| Abrasion resistance | ISO 10582 | Туре 1 |
| Flexibility | ISO 24344 | Pass |
| Dimensional stability | ISO 23999 | Pass (≤ 0.10%) |
| | ISO 140-8 Improved Impact Sound Insulation ASTM E492-09 Impact Insulation Class | △L _w = 14 dB IIC 56 dB |
| Acoustic impact noise reduction | Suitable for use on upper floors of r need for a separate acoustic under available from Karndean. | residential high-rise apartment buildings without the lay under certain build specifications – precise detail arndean INSUL Marshall Day Software report for your |
| | MULTI Res specification including A/ | |
| Electrical behaviour body voltage | EN 1815 AATCC 134-1996 | Pass Pass |
| Indentation - residual | ISO 24343-1 | Pass (≤ 0.1 mm) |
| Castor chair continuous use | ISO 4918 | Pass |
| Thermal resistance | ISO 8302 | 0.0245 m²K/W Suitable for underfloor heating. Max 27ºC |
| Slip resistance ² | AS/NZS 4586:2013 | Planks: R10, P2 (Except for LLP95, LLP152, LLP153, LLLP154: R10, P1) Tiles: R9, P2 |
| Adhesive | Karndean Hi-Tack PS Adhesive when | applicable; please refer to our installation instruction |
| Recycling | | Suitable |
| | | |

1 Subject to terms.

2 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values. Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.





Access full technical data View EPD

Explore technical





resources & BIM assets



Get installation guidelines



Learn about adhesive options

KORLOK

Our Korlok collection draws inspiration from some of the world's most sought-after natural wood and stone species, including the modern elegance of European Oak, the timeless appeal of Australian Spotted Gum and Blackbutt, the rustic charm of Barnwood and Hickory, and the understated beauty of Ash - offering a style to complement any interior.


The range also features stone designs influenced by both nature and contemporary design trends. Choose from the sleek minimalism of Concrete, the refined luxury of Marble, the classic sophistication of Limestone and Slate, and the bold character of Terrazzo. With its wide-ranging palette, Korlok offers versatile options to suit every aesthetic.







View the range

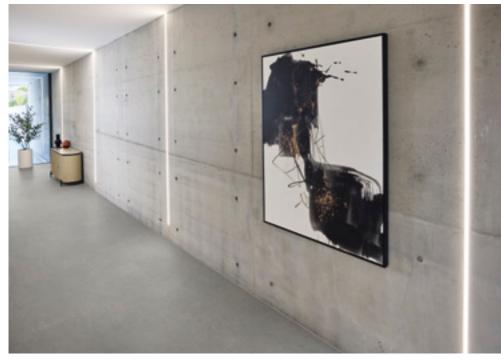

Grey Castello Marble **RKT2417**



Limed Loire Oak **RKP8243**



Golden Ash RKP8242



Light Spotted Gum RKP8239

Smooth, quiet, and built for performance, this flooring is ideal for demanding multi-level projects.

It absorbs minor subfloor imperfections and reduces noise transfer by up to 21dB, creating a more comfortable, peaceful environment. The innovative Välinge 5G® click-lock system enables quick, secure installation, minimising downtime and on-site disruption.

Its dense cellular structure boosts resilience and indentation resistance, while the 100% PVC rigid core allows for easy hand-cutting. This eliminates the need for power tools, reduces dust, and ensures a safer, cleaner installation even in occupied spaces.

AT A GLANCE

1420.0 x 225.0mm (55.91" x 8.86")

Warm Ash RKP8103

Golden Ash RKP8242







Antique French Oak **RKP8110**



457.0 x 600.0mm (17.99" x 23.62")







Grey Castello Marble **RKT2417**

Pebble Grey **RKT2410**

Our three striking Korlok Breccia Marble designs are available in a larger tile format, setting them apart from the rest of our stone collection.

This expanded size is ideal for showcasing the intricate, natural beauty of Italian Breccia marble where fragments of rock are naturally embedded in the stone, creating a distinctive, organic pattern.

457.0 x 935.0mm (17.99" x 36.81")





Bianco Breccia Marble **RKT3021**

Luna Breccia Marble **RKT3020**










Tortora Breccia Marble **RKT3018**



Pale Loire Oak **RKP8245**

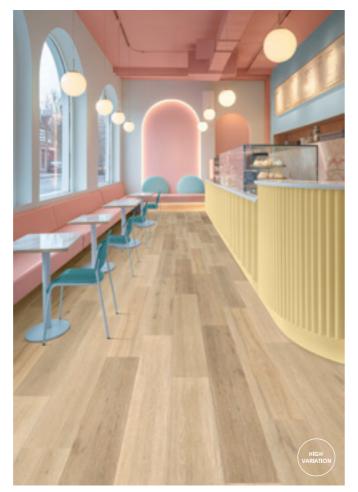

Bisque Ash RKP8241

| | Standard | Result |
|---------------------------------|---|--|
| Size | EN ISO 24342 | See pages 54 - 55 |
| Thickness | EN ISO 24346 | 6.5 mm |
| Wear layer | EN ISO 24340 | 0.55 mm |
| Locking system ¹ | | 5G® Fold Down installation system |
| Surface treatment | | K-Guard+® PU coating |
| Warranty ² | Commercial Domestic | 15 years wear Lifetime wear |
| Bevelled edge | | Micro |
| Standards | EN 16511 | Pass: Multilayer modular floorcovering panels |
| Classification | ISO 10874 - Commercial ISO 10874 - Domestic | 33: Commercial heavy 23: Domestic heavy |
| Reaction to fire | AS ISO 9239.1:2003 | CRF: 6.8 kW/m² Smoke Value: 154% min. |
| Slip resistance ³ | AS4586:2013 | R10, P2 |
| Staining | EN 438-2 | Pass (grade 5) |
| Light fastness | EN ISO 105-B02 | Pass (≥ 6) |
| Abrasion resistance | EN 13329 Annex E | Pass (4000 cycles) |
| Furniture chair leg | EN 424 | Pass (no visible damage) |
| Dimensional stability | BS EN ISO 23999 | Pass (≤ 0.25%) |
| Swelling | ISO 24336 | Pass (0.2%) |
| | EN ISO 10140-1:2016 NCC F5.3(a) requirement of ≤ 62 dB under ISO 717.2:2013 | $\Delta L_w = 21 \text{ dB}$ Ln,w = 52 dB |
| Acoustic impact noise reduction | G6.3.2 impact insulation class ≥ 55 IIC ASTM E492-09 | Pass IIC 62 |
| | Suitable for use on upper floors of resid a separate acoustic underlay. | lential high rise apartment buildings without the need for |
| Indentation - residual | ISO 24343-1 | Pass (< 0.1 mm) |
| Impact resistance | EN 13329 Annex F | Pass (≥ 1800 mm) |
| Castor chair continuous use | ISO 4918 | Pass (25,000 cycles) |
| Thermal resistance | ISO 8302 | 0.0515 m²K/W Suitable for underfloor heating. Max 27°C |
| Recycling | | Suitable |
| Phthalate free | | Yes |

5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.
 Subject to terms. Please see our website.
 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.
 Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.





Access full technical data View EPD







Explore technical resources & BIM assets




Get installation guidelines

VAN GOGH

The design you want in the format you need

Van Gogh showcases a stunning selection of timber-inspired designs, celebrating the rich diversity and character of the world's most beautiful woods. From classic European species like Oak, Elm, Maple, and Birch to quintessential Australian timbers such as Blackbutt and Spotted Gum, this collection highlights the natural beauty, colour, and texture of these iconic woods. With a variety of tones and textures, the Van Gogh Range offers a versatile selection that complements any interior style, bringing the warmth and elegance of nature into your space.

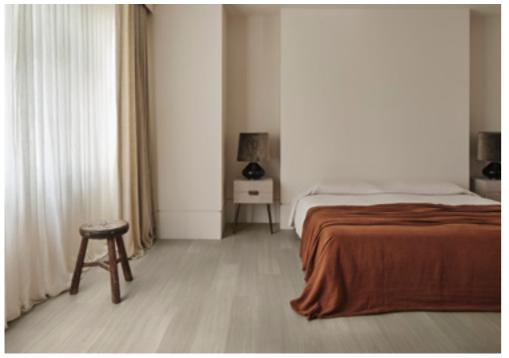

Misty Grey Oak VGW112T | SCB-VGW112T



Tranquil Oak VGW135T | SCB-VGW135T







Blush Oak VGW107T



River Spotted Gum VGW131T | SCB-VGW131T



View the range

Designed for versatility, Van Gogh is available in both gluedown and rigid core formats, allowing you to tailor installation to project-specific requirements. The gluedown option provides unlimited design flexibility, including precise cut and pattern installations, while the rigid core format offers a quick, floating installation with an acoustic backing that reduces noise transfer ideal for multi-level buildings.

Both formats feature Karndean's signature wood-look designs with exceptional durability, dimensional stability, and scratch resistance, ensuring long-term performance in both residential and commercial settings.

AT A GLANCE

Gluedown: 1219.2mm x 177.8mm (48.0" x 7.0") | Rigid core (SCB-): 1220.0mm x 180.0mm (48.03" x 7.09")



Marron Elm VGW132T | SCB-VGW132T









Country Oak VGW8IT | SCB-VGW8IT

Distressed Oak VGW82T | SCB-VGW82T



Smoked Maple VGW128T | SCB-VGW128T

Nocturne Oak VGW134T | SCB-VGW134T



Green Building Council Australia

/ERIFIED FOUNDING MEMBER 00 Ø. score ENVIRONMENTAL PRODUCT DECLARATION BASED ON LCA CERTIFIED BY SCS Global Se



Recycling

Phthalate free

1 5G[®] is a patented technology invented by Välinge Innovation AB. The 5G[®] word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 Subject to terms. Please see our website.

3 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values. Every Karndean range and format meets our certification policy standards - be sure to verify the current certification status.





Access full technical data View EPD



| Gluedown result | Rigid core result |
|---|---|
| 1219.2 mm x 177.8 mm | 1220.0 mm x 180.0 mm |
| 3.0 mm | 5.5 mm |
| 0.55 mm | 0.55 mm |
| - | 5G® Fold Down installation system |
| K-Guard+® PU coating | K-Guard+® PU coating |
| 15 years wear Lifetime wear | 15 years wear Lifetime wear |
| Micro | Micro |
| Pass - | - Pass: Multilayer modular floorcovering panels |
| 33: Commercial heavy 23: Domestic heavy | 33: Commercial heavy 23: Domestic heavy |
| CRF: 7.3 kW/m² Smoke value: 124% min. - | - CRF: 10.4 kW/m² Smoke value: 200% min. |
| Excellent | - Pass (grade 5) |
| R10, P2 - | - R10, P3 |
| Pass (≥ 7) - | - Pass (≥ 6) |
| Type 1 - | - Pass (> 4000 cycles) |
| Pass (≤ 0.25%) - | - Pass (≤ 0.25%) |
| Pass | - |
| Pass | - |
| Pass (≤ 0.1 mm) | Pass (≤ 0.1 mm) |
| Karndean Mega-Bond Two-part chemical cure adhesive or, one-part modified silane heat and moisture resistant adhesive. | None required; please install according to our installation instructions. |
| Suitable | Suitable |
| Yes | Yes |
| | |



Explore technical resources & BIM assets



Get installation guidelines





Learn about adhesive options

KNIGHT TILE

The design you want in the format you need

The Knight Tile collection offers a versatile range of wood and stone designs, ideal for both residential and light commercial spaces.

Our wood planks are designed to capture the authentic grain of timber, with options like the cool tones of Coastline Oak, the balanced mid-tones of Mid Limed Oak, and the deep, rich hues of Shadow Studio Oak. The stone designs offer a variety of looks, from classic light tones to bold, contemporary dark styles. Featured designs include the timeless Grey Riven Slate, the sleek Honed Oyster Slate, and the striking Honed Charcoal Slate - all perfect for seamlessly integrating into any interior style.




Shadow Studio Oak **KP150-7**



Coastal Blackbutt KP157-7 | SCB-KP157





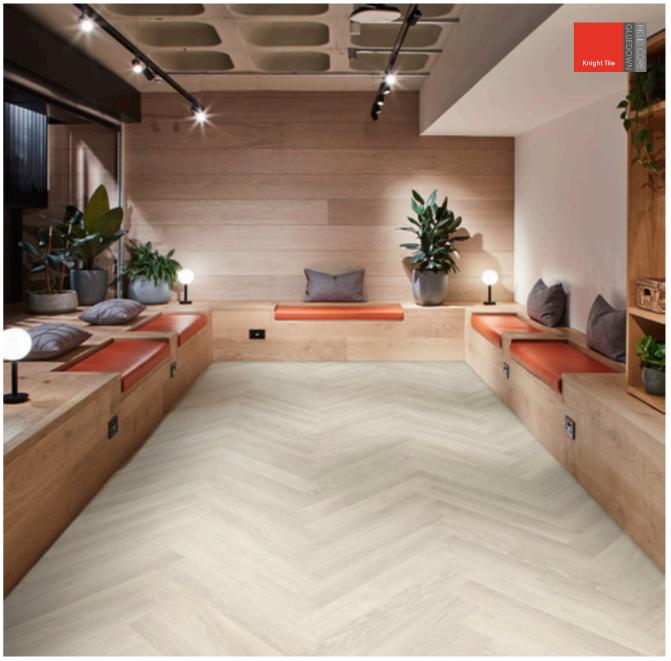

Nordic Limed Oak KP153-7



Honed Pebble Slate ST20 | SCB-ST20-18

View the range

Balancing style and versatility, Knight Tile is offered in both gluedown and rigid core formats, providing flexibility to meet various project needs.

The gluedown format allows for detailed design customisation, including borders and patterns, while the rigid core option offers a fast, floating installation with an integrated acoustic backing that reduces noise transfer and enhances comfort underfoot.

With a wide range of natural wood and stone visuals, Knight Tile delivers a durable, low-maintenance flooring solution perfect for residential and light commercial spaces. Whether your priority is precision installation or quick fitting, Knight Tile offers the ideal combination of aesthetics and practicality.

AT A GLANCE

Gluedown: 914.4mm x 152.4mm (36.0" x 6.0") | Rigid core (SCB-): 914.4mm x 150.0mm (36.0" x 5.91")

| ALL DESCRIPTION OF THE PARTY |
|--|
| Nordic Limed Oak KPI53 SCB-KPI53 |
| 44 White Painted Oak KP105-7 SCB-KP105 |
| (MEG) WARDIN |
| Coastal Blackbutt KP157-7 SCB-KP157 |
| |
| Rose Washed Oak KP95-7 SCB-KP95 |
| WARNO |
| Grey Limed Oak KP138-7 SCB-KP138 |
| - In the the second |
| KP146 Light Worn Oak KP104-7 SCB-KP104 |
| |
| Urban Spotted Gum KP141-7 SCB-KP141 |
| (MARINA) WARRAN |
| Shadow Studio Oak KP150-7 SCB-KP150 |
| |
| Shadow |

Gluedown: 914.4mm x 152.4mm (36.0" x 6.0") | Rigid core (SCB-): 914.4mm x 150.0mm (36.0" x 5.91")

Grey Riven Slate STI6 | SCB-STI6-18



oked Concret

ST21 | SCB-ST21-18







ST19 | SCB-ST19-18





| | Standard | Gluedown result | Rigid core result |
|------------------------------|--|--|--|
| Size | EN ISO 24342 | See page opposite | See page opposite |
| Thickness | EN ISO 24346 | 2.0 mm | 4.5 mm |
| Wear layer | EN ISO 24340 | 0.3 mm | 0.3 mm |
| Locking system ¹ | | - | 2G™ angling installation system |
| Surface treatment | | K-Guard+® PU coating | K-Guard+® PU coating |
| Warranty ² | Commercial | 10 years light commercial wear | 10 years wear |
| | Domestic | Lifetime wear | Lifetime wear |
| Bevelled edge | | No | No |
| Standards | EN ISO 10582 EN 16511 | Pass - | - Pass: Multilayer modular floorcovering panels |
| Classification | ISO 10874 - Commercial ISO 10874 - Domestic | 31: Commercial moderate 23: Domestic heavy | 31: Commercial moderate 23: Domestic heavy |
| Reaction to fire | AS/NZS ISO 9239.1:2010 AS ISO 9239.1:2003 | CRF: 8.1 kW/m² Smoke value: 42% min. - | - CRF: 10.1 kW/m² Smoke value: 171% min. |
| Staining resistance | EN ISO 26987 EN 438-2 | Excellent | - Pass (Grade 5) |
| Light fastness | ISO 105-B02 EN ISO 105-B02 | Pass (≥ 6) - | - Pass (≥ 6) |
| Abrasion resistance | ISO 10582 EN 13329 Annex E | Туре 1 - | - Pass (> 10 000 cycles) |
| Flexibility | ISO 24344 | Pass | - |
| Dimensional stability | ISO 23999 BS EN ISO 23999 | Pass (≤ 0.25%) - | - Pass (≤ 0.25%) |
| Slip resistance ³ | AS/NZS 4586:2013 | Planks: R10, P2 Tiles: R9, P3 | - |
| Supresistance | AS4586:2013 Appendix D | - | Planks: R10, P3 Tiles: R10, P4 |
| Adhesive | General use: High temperature: | Karndean Mega-Bond Two-part chemical cure adhesive or, one-part modified silane heat and moisture resistant adhesive | None required; please instal according to our installation instructions. |
| Recycling | | Suitable | Suitable |
| Phthalate free | | Yes | Yes |
| | | | |

1 2G[™] is a patented technology invented by Välinge Innovation AB. The 2G[™] word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 Subject to terms. Please see our website.

Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.
 Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.





Access full technical data View EPD

Explore technical







resources & BIM assets



Get installation guidelines



Learn about adhesive options

OPUS

Opus is the ideal choice for commercial interiors and new builds, where style, durability, and practicality are essential.

With a contemporary range of wood and stone-inspired designs, Opus provides a versatile foundation for modern spaces. The warm, natural tones of oak offer timeless appeal, while marbles and terrazzo deliver a sleek, architectural finish.

Engineered for high-traffic environments, Opus combines precision-crafted formats, flexible installation options, and NCC-compliant slip ratings, creating flooring that as functional as it is beautiful.




Rhine Oak WP432 | WP432-SR



Niveus WP411 | WP411-SR





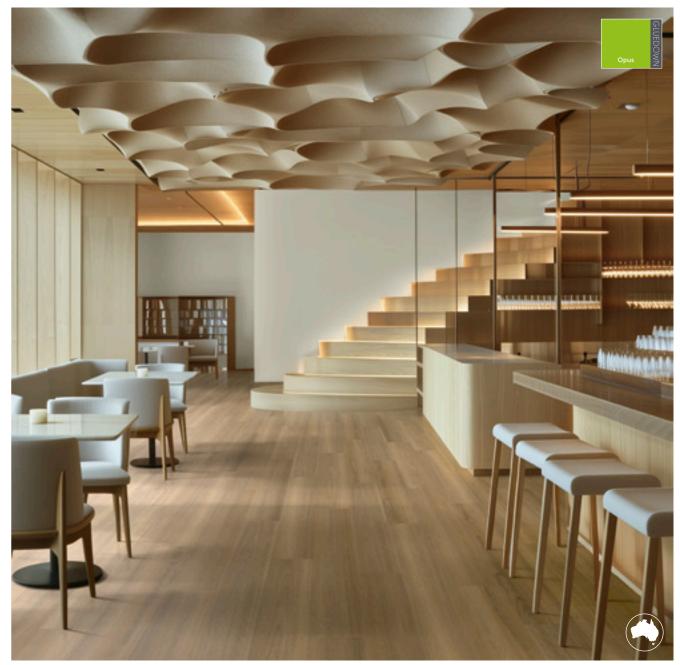

Coastal Eucalypt WP434 | WP434-SR



Mosel Oak WP430 | WP430-SR

View the range

Opus is a durable and versatile LVT range, designed for modern commercial environments.

Featuring large-format wood-look planks and stonelook tiles in a contemporary colour palette, each design is available with both P3 and P4* slip ratings, providing flexibility to meet diverse performance requirements while maintaining a cohesive aesthetic.

Utilise contrasting tones, textures, and laying patterns to define zones, guide movement, and elevate retail, hospitality or workplace spaces effortlessly.

AT A GLANCE

1219.2mm x 228.6mm (48.0" x 9.0")



Metsu Oak WP424 | WP424-SR





en Oak WP426 | WP426-SR



Vermeer Oak **WP427 | WP427-SR**



Potter Oak WP428 | WP428-SR



Our three striking Opus Terrazzo designs are offered in a generously larger tile format of 457mm x 935mm, setting them apart from the rest of the stone tiles in the collection.

This larger size is perfect for highlighting the intricate beauty of terrazzo, allowing its captivating patterns to take centre stage. The expanded surface area creates a seamless, impactful look - ideal for making a bold design statement in any project.

457.2mm x 914.4mm (18.0" x 36.0")





Oscuro Terrazzo SP741 | SP741-SR



Platino Terrazzo SP742 | SP742-SR

609.6mm x 609.6mm (24.0" x 24.0")



P4





Granada SP814 | SP814-SR

Sillano Marble SP816 | SP816-SR

Opus P4

Opus P4/R10-R11 rated designs feature an enhanced finish with a rougher surface texture, specifically designed for commercial environments requiring a high slip rating. These P4/R10-R11 rated designs, ending in '-SR,' are available by indent order. This means these designs are not stocked for immediate dispatch, and lead times are available upon request. Please speak with your Karndean Business Manager for more information.

Opus P3/R9-R10 tiles and planks are available for immediate dispatch.




P4




Salute Blanco SP743 | SP743







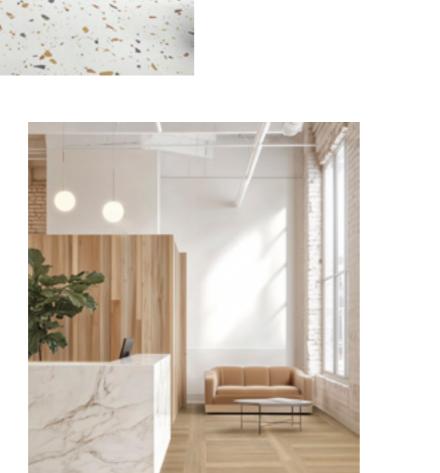

Coastal Eucalypt WP434 | WP434-SR



| | Standard | Result |
|--|--|--|
| Size | EN ISO 24342 | See pages 68 - 69 |
| Thickness | EN ISO 24346 | 2.5 mm |
| Wearlayer | EN ISO 24340 | 0.55 mm |
| Surface treatment | | K-Guard+® PU coating |
| Warranty ¹ | Commercial Domestic | 15 years wear Lifetime wear |
| Bevelled edge | | Micro |
| Standards | EN ISO 10582 | Pass |
| Classification | EN ISO 10874 - Commercial EN ISO 10874 - Domestic | 33: Commercial heavy 23: Domestic heavy |
| Reaction to fire | AS/NZS 9239.1:2010 | CRF: > 11 kW/m² Smoke value: 93% min. |
| Staining resistance | EN ISO 26987 | Excellent |
| Light fastness | EN ISO 105-B02 | Pass (≥7) |
| Abrasion resistance | EN ISO 10582 | Туре 1 |
| Dimensional stability | ISO 23999 | Pass (≤0.25%) |
| Acoustic impact noise reduction ² | EN ISO 717-2 / EN ISO 140-8 | $\Delta L_w = 2 dB$ |
| Indentation - residual | ISO 24343-1 | Pass (≤0.1 mm) |
| Castor chair continuous use | ISO 4918 | Pass |
| Thermal resistance | ISO 8302 | 0.0097 m²K/W Suitable for underfloor heating. Max 27°C |
| Slip resistance ³ | AS/NZS 4586:2013 | Opus Planks: R10, P3 Tiles: R9, P3 Opus P4³ Planks: R11, P4 Tiles: R10, P4 |
| | General use: | Karndean Mega-Bond |
| Adhesive | High temperature: | Two-part chemical cure adhesive or, One-part modified silane heat and moistur resistant adhesive |
| | GBCA/NZGBC GreenStar Rating System | GreenRate Level 'A'; LCA Silver Plus |
| | Floorscore SCS-EC10.3-2014 v4.0 | Indoor air quality certified; Compliant low emitting VOC emissions. |
| Environmental | Indoor Air Comfort | Gold certification Compliant low emitting VOC emissions. |
| Livioninende | Environmental Product Declaration | External third-party verified Type III EPD |
| | NSF/ANSI 332 | Sustainability Assessment for Resilient Floo Coverings; Conformant product |
| | ISO 14001 / ISO 9001 | Manufactured to quality and environment management systems standards |

Subject to terms. Please see our website.
 Result is Ln,w = 58 dB when installed on Regupol 4515 acoustic underlay

Result is LIW = 36 db Witeri installed on Regulpol 435 accounce Unitertay
Silp resistance is measured on result on the surface of the product can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values. Where a product has been tested using the wet pendulum method and received a 'P' rating - that does not mean that the product is designed for use in wet areas. Only product specifically noted as being suitable for wet areas should be used in those conditions. Use in wet conditions may result in reduced slip resistance and increased risk of slips and falls. Please ensure that products in installed and maintained according to the provided guidelines.
Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.







Access full technical data View EPD

Explore technical





resources & BIM assets



Get installation guidelines



Learn about adhesive options

ART SELECT

The premium Art Select range captures the timeless charm and character of natural wood, bringing Oak and Hickory to life with intricate designs and realistic embossing.

Each plank reveals the unique grains, knots, and textures that make real wood so enchanting. Far more than a beautiful floor, every Art Select design narrates its own story, imbuing any space with a sense of depth, warmth, and refined elegance.



Hickory Peppercorn EW02



Winter Oak **RL04**



Auburn Oak AP02



Spring Oak **RL01**



View the range

Infuse your space with the finest natural aesthetics with Karndean Art Select. Inspired by the beauty of genuine wood and stone, this premium collection showcases intricate textures, rich tones, and authentic detailing, creating a truly luxurious finish.

Art Select's gluedown format offers endless design possibilities, from custom layouts to inlay borders, while its superior wear layer ensures exceptional durability and resistance to heavy foot traffic. Whether enhancing highend residential interiors or prestigious commercial spaces, Art Select seamlessly blends timeless elegance with the enduring practicality of Karndean LVT.

AT A GLANCE

228.6mm x 76.2mm (9.0" x 3.0")

Spring Oak **AP01**

Dawn Oak **AP02** Midnight Oak AP03

914.4mm x 152.4mm (36.0" x 6.0")






Hickory Paprika **EW01**

Dawn Oak **HC01**



Hickory Nutmeg EW03



Hickory Peppercorn EW02

1219.2mm x 177.8mm (48.0" x 7.0")



Summer Oak **RL02**



Winter Oak **RL04**

| | Standard | Result |
|-----------------------------------|--|---|
| Size | EN ISO 24342 | See page opposite |
| Thickness | EN ISO 24346 | 3.0 mm |
| Wearlayer | EN ISO 24340 | 0.7 mm |
| Surface treatment | | K-Guard+® PU coating |
| Warranty ¹ | Commercial Domestic | 20 years wear Lifetime wear |
| Bevelled edge | | Standard |
| Standards | EN ISO 10582 | Pass |
| Classification | ISO 10874 - Commercial ISO 10874 - Domestic | 34: Commercial very heavy 23: Domestic heavy |
| Reaction to fire | AS/NZS 9239.1:2003 | CRF: Smoke value: Handcrafted Wood 7.1 kW/m² 121% min Oak Royale 6.4 kW/m² 114% min Oak Premier 8.5 kW/m² 177% min Parquet 8.5 kW/m² 220% min |
| Staining resistance | EN ISO 26987 | Excellent |
| Light fastness | ISO 105-B02 | Pass (≥ 6) |
| Abrasion resistance | ISO 10582 | Туре 1 |
| Flexibility | ISO 24344 | Pass |
| Dimensional stability | ISO 23999 | Pass (≤ 0.25%) |
| Acoustic impact noise reduction | EN ISO 717-2/EN ISO 140-8 | $\triangle L_w = 2 \text{ dB}$ |
| Electrical behaviour body voltage | EN 1815 | Pass |
| Indentation - residual | ISO 24343-1 | Pass (≤ 0.1 mm) |
| Castor chair continuous use | ISO 4918 | Pass |
| Thermal resistance | ISO 8302 | 0.0147 m²K/W Suitable for underfloor heating. Max 27°C |
| | | APO1, APO2, APO3, RLO1, RLO2, RLO3. RLO4 R9, P1 |
| Slip resistance ² | AS/NZS 4586:2013 | EW01, EW02, EW03, HC01, HC02, HC03, R9, P2 HC04, HC05, HC06 |
| | General use: | Karndean Mega-Bond |
| Adhesive | High temperature: | Two-part chemical cure adhesive or, one-part modified silane heat and moisture resistant adhesive. |
| Recycling | | Suitable |
| Phthalate free | | Yes |

¹ Subject to terms. Please see our website. ² Result is Ln,w = 58 dB when installed on Regupol 4515 acoustic underlay.

As the server of the server of the server of the server of the product can affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.
Every Karndean range and format meets our certification policy standards – be sure to verify the current certification status.







Access full technical data View EPD





Explore technical resources & BIM assets



Get installation guidelines



Learn about adhesive options

RESOURCES & SUPPORT

We've curated a comprehensive portfolio of resources, both online and offline, to support your project.

From downloadable files available in our Technical Hub and inspiration drawn from our case studies, to our full suite of digital tools — including our interactive visualiser, Floorstyle, and BIM files, we're here to assist you in selecting the perfect floor for your project.

DIGITAL TOOL SUITE

To ensure you have everything you need from Karndean Commercial for your projects, visit **karndeancommercial.com** where you can access our Floorstyle designer tool and Technical Hub.



Floorstyle designer tool

Our interactive room viewer, Floorstyle, lets you view our wide range of floors in typical commercial settings.




With improved usability, more sector-specific settings, optional colour schemes and side-by-side comparison, you can discover our stylish and highly practical flooring in a truly visual manner.





Specifiers can now access our complete portfolio of wood and stone designs as BIM components. With many advantages over previous project management tools, BIM allows specifiers to include both 3D colour models and technical details in one

place, enabling clients to visualise what the end product will look like and other project team members to easily access the technical specifications they require.



Continue your professional journey with us

As a leader in flooring design, we are proud to share our knowledge and expertise to help you expand your skills and inspire you to explore the endless possibilities of flooring design.



Whether you are looking to design exceptional interiors that stand out from the crowd, maximise accessibility or enhance indoor environmental quality, our free CPD seminars will guide you through design principles, innovative flooring solutions and the latest legislation.



Product Aware

We're excited to be part of Product Aware, a new tool that simplifies the way that we assess the sustainability credentials of the products we choose.

Sustainability Data Sheets are available at karndeancommercial.com



LooseLay Originals: Brockton LLP153 🏾

TECHNICAL HUB

On the technical hub, you will find all the product regulatory and compliance information you need to design and install a floor that will stand out for all the right reasons.



Our technical hub has been designed for architects, interior designers and contractors, placing all the information you need conveniently at your fingertips, from technical data to help you specify the best product for any situation, to advice on installation and ongoing cleaning and maintenance.

On the hub you can find out more about our commitment to producing stylish and durable floors with the lowest possible impact on the environment and our sustainability accreditations. Our environmental product declarations are available to download, providing detailed information about each of our formats: loose lay, rigid core and gluedown. Discover a wealth of resources, including:

- Technical Data Sheets (TDS) and Sustainability Data Sheets (SDS) for detailed product specifications
- Environmental Product Declarations (EPD) for sustainability insights
- Karndean Evolve® and ResiLoop initiatives for eco-conscious design
- Acoustic flooring solutions to enhance sound control
- BIMStore for seamless project integration
- Case Studies showcasing innovative applications
- Installation Guides for flawless implementation
- Floorstyle for interactive room visualisations
- Warranty Information for added peace of mind
- Cleaning & Maintenance Guides for long-term care
- FAQs to address your top questions

Explore these tools to elevate your projects, streamline your process, and enhance design outcomes!

www.karndeancommercial.com/technicalhub





LooseLay Originals: Levanzo LLP150

QUALITY AND SERVICE

Our Distribution Centre is one of our greatest assets. Working seamlessly, we move hundreds of pallets in and out of the facility every day. We pride ourselves on our stock holding capability to ensure the product you order is delivered in full and on time.

In addition to the regular daily despatch of products to our customers, we operate a full next day samples service. This can include swatch samples, full size planks or tiles.

All of our products are manufactured to ISO 9001. In addition to this, our robust quality control mechanisms ensure that our products reach their final destination in top condition.


We also have a highly experienced technical service team who are at hand to support you through the specification, installation and maintenance of your chosen design.

For more information on how to order your sample today, contact your local commercial business manager or call our customer service team on:

1800 331 170

karndeancommercial.com



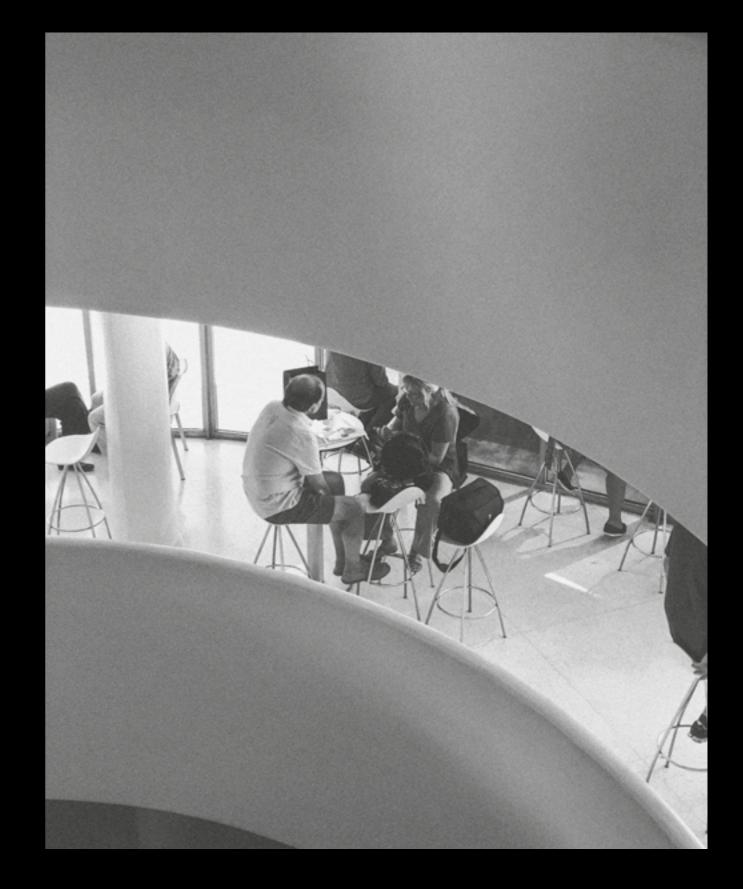

Imagery and Design Reproduction

Photography and print cannot always produce a perfect representation of our products. This includes colour, pattern variation and installation elements used.

For this reason we strongly recommend obtaining a product sample and where possible viewing a larger sample in-store. We also recommend visiting our website for information on installation, after care and product selection. We love developing new ideas and improving on our existing designs which means that sometimes products are withdrawn at short notice.

We hate to disappoint and will work with you to find an alternative design. Please contact Customer Service for more information. It is recommended that when selecting flooring products, you verify compliance with building regulations and certification practices relevant to your local area. All Karndean range and format credentials are at our certification policy level. Please check for the current certification status.





I.

11

t. 1800 331 170 karndeancommercial.com

KD8698AUS | BR25-COMM | 07/25