



Karndean  
COMMERCIAL





# CONTENTS

|  |     |
|--|-----|
| Introduction                           | 2   |
| Karndean Inspiration                   | 3   |
| Karndean Design Aesthetics             | 4   |
| Karndean Evolve™                       | 6   |
| <b>Commercial Sectors</b>              |     |
| Healthcare                             | 10  |
| Education                              | 12  |
| Hospitality                            | 14  |
| Multi-family                           | 16  |
| Modular                                | 17  |
| <b>Designs and Product Collections</b> |     |
| Karndean LVT                           | 18  |
| Installation Formats                   | 20  |
| Wood-Inspired Designs                  | 22  |
| Stone-Inspired Designs                 | 28  |
| Abstract-Inspired Designs              | 30  |
| Art Select                             | 32  |
| Van Gogh                               | 46  |
| Opus                                   | 54  |
| Knight Tile                            | 70  |
| Karndean LooseLay                      | 78  |
| Korlok Select                          | 90  |
| Korlok Reserve                         | 102 |
| <b>Design Solutions</b>                |     |
| Emblems and Logos                      | 108 |
| Solid Colors                           | 109 |
| Design and Grout Strips                | 110 |
| Trims                                  | 112 |
| Design Borders                         | 113 |
| Adhesives and Flooring Products        | 114 |
| <b>Resources and Support</b>           |     |
| Online Tools and Resources             | 116 |
| Customer Support                       | 118 |
| Samples                                | 119 |
| Contact Us                             | 120 |



**Karndean  
COMMERCIAL**

## ALWAYS ONE STEP AHEAD

A family-owned business founded in 1973, we've continually been at the forefront of LVT innovation, offering the most beautifully realistic wood- and stone-inspired designs in a flooring product that meets the practical considerations of commercial installation and performance.

With over 50 years of experience, we're always one step ahead.







## Inspired by Wood and Stone From Around the World

We travel the world to seek out the beautiful woods and stones that inspire our LVT flooring – straight-grain ash from the rugged Rocky Mountains to luxurious marble from one of Italy's oldest quarries.


In the hands of our talented design team, those woods and stones are used to craft flooring of different colors, textures and character, providing stylish options for a variety of interior design aesthetics.

Every wood and stone design is a Karndean original, each as unique as the space you're creating.



# KARNDEAN DESIGN AESTHETICS

## THE SYNTHESIS OF STYLE + MOOD

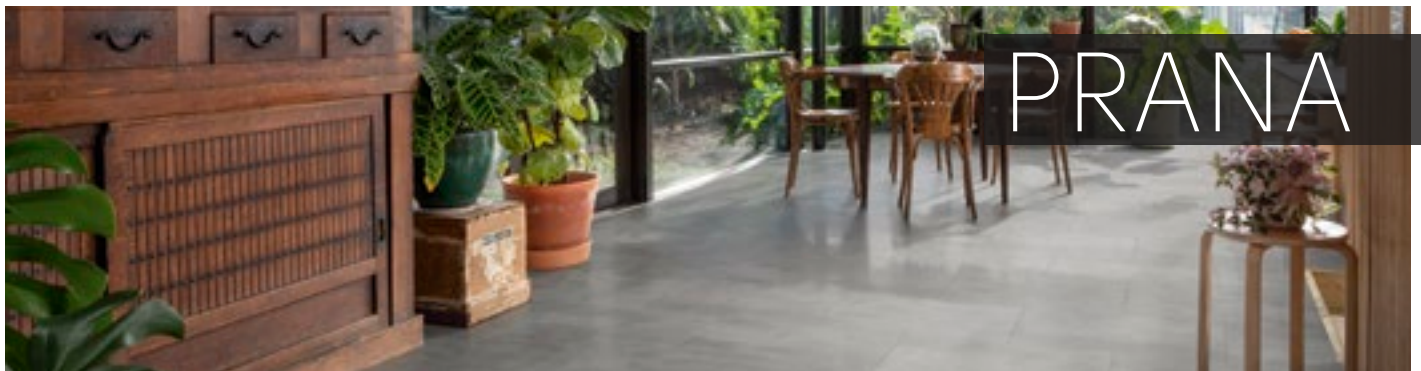

■ Vermont LLT217



■ Niveus WP411



■ Pale Limed Oak CH-KP94 | SCB-CH-KP94

Create a feeling. Evoke a mood. Express a distinctive style.

The character, color and texture of our original flooring designs are carefully chosen to complement larger interior design aesthetics – holistic perspectives that shape the look, feel and function of an entire space.

Our design aesthetics are continually influenced by the world around us. Changing behaviors, attitudes and values are represented through design choices for colors, textures, shapes and forms.

Which design aesthetic matches your vision? Use it to choose a floor that makes the right impression. For more information visit [karndeancommercial.com/aesthetics](https://karndeancommercial.com/aesthetics).

## BALANCE | COMFORT | RENEWAL

In yoga, prana refers to breath, a life-sustaining force. Just as breathing exercises bring a sense of calm and relaxation, we can create comfortable spaces where people continually return to decompress from everyday deadlines and to-do lists – familiar spaces for renewal, physically and mentally. In a larger sense, these spaces offer balance against the jarring emotional toll of the world's crises and conflicts, allowing those who use these spaces to maintain a healthy equilibrium.



## CONFIDENCE | ASSUREDNESS | PURPOSE

Technology is seamlessly integrated with everyday life, allowing us to remain connected in the ways we choose – or to tune out the noise entirely. A constant presence, technology remains sleek and unobtrusive in form, each new iteration more refined than the last. In commercial settings, the influence translates to an “optimization” of the space, where every design choice is intentional, favoring fine-tuned function and understated luxury over excess and indulgence. The elegant minimalism is an exercise in control, creating a sense of order when life, and the world at large, can be loud and chaotic.



## INSPIRATION | ESCAPE | STIMULATION

Designed to stimulate the senses and spark the imagination, these spaces mirror the influence of fully immersive experiences, offering an escape from the same-old, same-old. Rich with striking patterns, mood-enhancing colors and bold juxtapositions, the maximalist ethos also reflects a niche of social media influencer culture, one that celebrates the joy of indulgence. Mix + Max disregards conventional rules to make a statement loud and clear, putting the fun and fearlessness of the creative spirit on full display.







# KARND EANEVOLVE™

## THE PROMISE OF A BETTER TOMORROW

Sustainable manufacturing.  
Complete supply chain transparency.  
Closed-loop product life cycles.  
And an even stronger commitment  
to fair and inclusive workplaces.

It's a continuing journey, and there  
are no shortcuts. But we know now's  
the time for everyone to begin taking  
bigger steps. Ours is a promise to think  
differently, act decisively, and create  
real change.

It's a promise to Evolve.

# CREATING REAL CHANGE

## 01

### **Confront climate change**

Reducing our carbon footprint through energy efficiency and use of renewable energy.

## 02

### **Individual health and well-being**

Ensuring the health and safety of those involved with manufacturing and use of our products.

## 03

### **Sustainable resource use**

Conserving natural resources; using post-industrial and post-consumer recycled materials; making products that can be recycled; elimination of raw materials derived from crude oil; creating closed-loop production processes.

## 04

### **Inclusion and diversity**

Nurturing an equitable, inclusive and diverse workplace culture through engagement and education.

## 05

### **Supply chain transparency**

Third-party certifications for environmental and social responsibility, including fair treatment and safe conditions for workers.

## 06

### **Employee education**

Educating employees about the importance of sustainability, helping them understand what role they play and increasing the likelihood of achieving our goals.

# ENVIRONMENTAL CLAIMS

Our partnership with The Anti-Greenwash Charter ensures you can trust that claims about our products and operations are fair, accurate and substantiated.



# 42% BY 2030

## GREENHOUSE GAS EMISSIONS REDUCTIONS

We've achieved a major milestone in our journey toward a sustainable future. The Science Based Targets initiative (SBTi), an international corporate climate-action organization, has approved our targets for greenhouse gas emissions reductions, validating that our near-term targets are aligned with the reductions necessary to prevent global warming from reaching catastrophic levels.



**We are committed to reducing absolute Scope 1 and Scope 2 GHG emissions 42% by 2030 from a 2022 base year.\***

Our approved targets meet SBTi's most ambitious designation by aligning with a 1.5° C climate trajectory, which refers to the goal of limiting global warming to 1.5° C above pre-industrial temperatures.

\*According to the U.S. Environmental Protection Agency, Scope 1 emissions are generated from sources owned or controlled by an organization; Scope 2 applies to indirect emissions from purchased energy.

"The climate crisis demands fundamental change in the way companies operate, and we are proud to step up and have our leadership independently recognized. Everyone has a responsibility to take meaningful action – and meeting the rigorous criteria for approval of our science-based targets affirms we are doing just that."

**Jamie Shaw, Karndean Global Head Of Sustainability**



■ River Marble **ST31 | SCB-ST31-G**



# THE PROMISE OF A BETTER TOMORROW

Sustainability includes protecting both the planet and its people. We meet third-party standards and have earned certifications that demonstrate our commitment to reducing our environmental impact while ensuring human health and safety.

## LEED projects

We are a member of the U.S. Green Building Council.  
Our products can earn LEED v4 points in two categories:

MR (Materials and Resources) - We have product-specific EPDs, which report objective third party-verified data about a product's environmental impact based on its life cycle.

EQ (Indoor Environmental Quality) - Products are FloorScore® certified.

## FloorScore®

Our flooring products are FloorScore® certified for post-installation indoor air quality, with independent testing proving them to be very low emitting in volatile organic compounds (VOCs). Our adhesives are either water-based or solvent-free with very low VOC emissions.

FloorScore® certification allows our products to be used for WELL v2 projects.

## NSF/ANSI 332

Most products are certified to NSF/ANSI 332, the foremost U.S. standard by which to evaluate and verify sustainability of floor coverings across the entire product life cycle.

## ASSURE CERTIFIED™

Our rigid core products are ASSURE CERTIFIED™ by the Resilient Floor Covering Institute (RFCI) and SCS Global Services, ensuring the flooring was manufactured to the highest standards and meets all the requirements for indoor air quality, rigorous performance, and low heavy metals and ortho-phthalates content.

## ISO 14001

Our products are manufactured in purpose-built factories certified to the ISO 14001 environmental standard, which provides a framework for measuring and reducing environmental impact, from facility water usage to eco-friendly product packaging.

## California Prop 65

Our flooring products are in compliance with California Proposition 65, free from chemicals known to cause cancer, birth defects or other reproductive harm. Products are free from heavy metals, BPA, formaldehyde and unsafe phthalates.

## mindful MATERIALS

Our products are included in the mindful MATERIALS database, which provides environmental information for architects, designers and contractors.




CERTIFIED BY  
SCS Global Services



# commercial sectors

## HEALTHCARE

Choose from countless stylish looks and colors to create vibrant modern spaces that inspire confidence and a sense of calm. Our durable LVT is hygienic, waterproof and easy to clean.

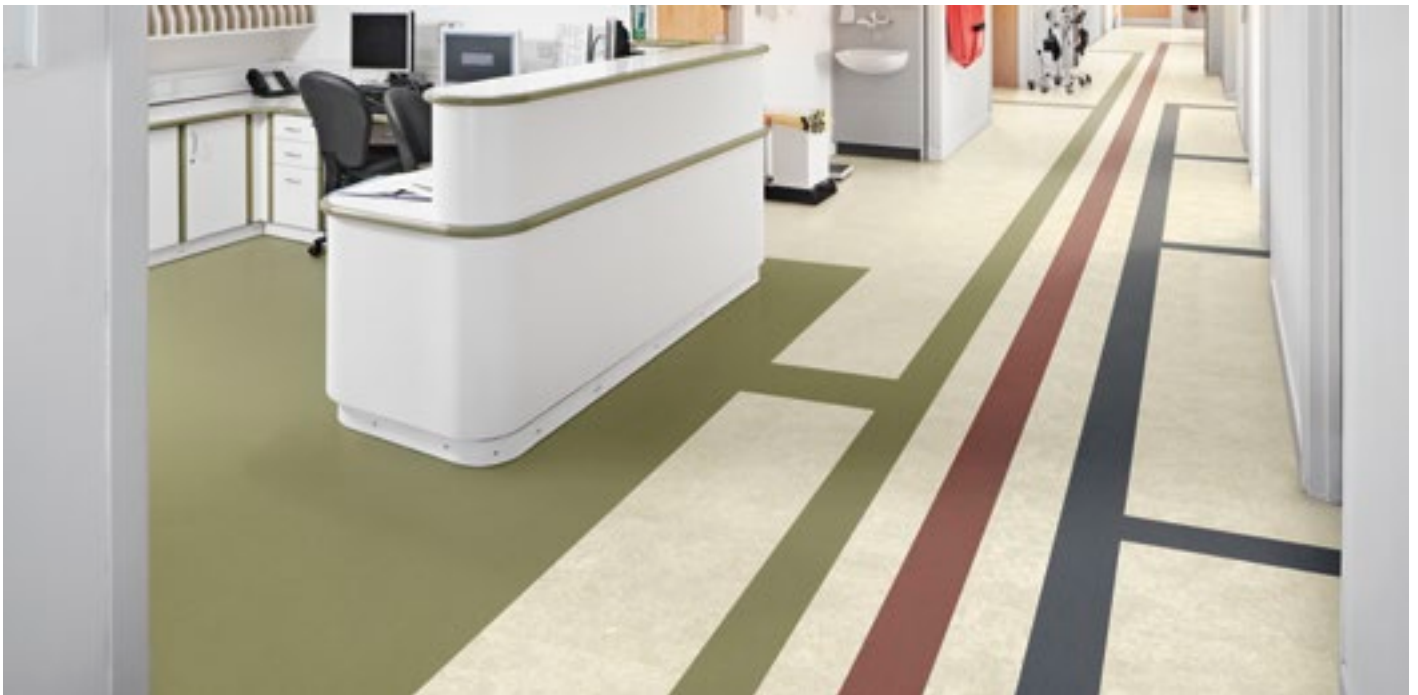

■ Toledo SP811 | Burnt Sienna SP719 | Indigo SP720 | Olive SP740



■ Salute Grisio SP118 | Burnt Sienna SP719 | Indigo SP720 | Ochre SP726



Healthcare, education, hospitality, multi-family – our LVT combines style, durability and performance for heavily trafficked environments.



■ Basque Oak **RL26** | Serrano Oak **RL28**



■ Nude Danish Oak **LLP358**

# EDUCATION

Durable, hygienic, and easy to clean and maintain – our LVT checks all the boxes for education spaces, from classrooms, dormitories and cafeterias to pre-K spaces.



■ Black Iron **SP728** | Burnt Sienna **SP719** | Chalk Grey **SP724**



■ Capri **LLT209**



■ Urban Spotted Gum **KP141** | SCB-KP141-6



■ Swan Bay Ash **LLP361**



# HOSPITALITY

Bars and restaurants to hotels and resorts – most have a distinct brand identity, with thoughtfully designed spaces to match. Impress with high-end style as part of an elevated brand experience.



■ Wheat Oak **LLP355**



■ Dune Oak **RL24** | Calacatta d'Oro **LM33** | Pavimento Bianco **LM42**



■ Pearl Onyx **LM35** | Rose Onyx **LM36** | Dove Artisan Oak **RL30**



■ Calacatta d'Oro **LM33**



# MULTI-FAMILY

Create stylish spaces that feel like home for residents without costly, time-consuming maintenance for building staff and management.



■ Mountain Slate **RKT3003-G**



■ Indigo **SP720** | Amber **SP721** | Black Iron **SP728** | Stratus **SP731**

# MODULAR

Modular construction continues to emerge as a growing sector, in many cases offering a cost-efficient solution for single- and multi-family housing. Available in three installation formats – loose lay, gluedown and rigid core – our stylish, durable LVT is ideal for a streamlined construction process.



■ Arctic Mist **RKT3005-G**



■ Sterling Oak **LLP354**

# LVT designs and product collections

## THE BEAUTY OF NATURE

## THE PERFORMANCE OF LVT

Inspired by wood and stone hand-selected from around the world, our stylish, durable LVT is guaranteed for up to 20 years in commercial settings. Available in three installation formats - gluedown, rigid core and loose lay - you can choose from hundreds of original designs to create beautiful spaces.

The variety of wood, stone and even abstract looks offers limitless creative possibilities – including the ability to mix and match for zoning and wayfinding.



### Stylish, realistic designs

Each and every design is original, meticulously crafted by our design team to capture the distinctive grains, textures and markings of hand-selected wood and stone.



### Waterproof and easy to clean

Our LVT is impervious to water, and it's easy to clean, too, with a pH neutral solution and mop. No harsh chemicals, waxing or machinery are needed.



### Exceptional durability

Guaranteed for up to 20 years with wear layers up to 30 mil, our LVT features K-Guard+® surface protection for scratch- and scuff-resistance.



### Quieter environments

Karndean LooseLay and rigid core products have a backing that reduces noise to lower floors. Our QuietChoice underlayment can be used with gluedown products to meet IIC 50 code requirements.



### Installation options

Choose from gluedown, loose lay or rigid core for installation based on site and project needs.



### Safe and hygienic

Our LVT is nonporous and does not harbor dust or contribute to bacterial growth. Materials used in the product are tested for safety.



All our collections offer something different — wear layer, thickness, installation format — but they've got one thing in common: stylish designs for creating beautiful spaces. Light or dark. Cool, warm or neutral. Choose from hundreds of wood and stone looks, or expand your creative palette with abstracts and solid colors.




■ Natural Prime Oak **VGW115T** | **SCB115**

# INSTALLATION FORMATS

Choose from gluedown, loose lay or rigid core for installation based on site and project needs.

## Gluedown

Gluedown LVT provides limitless design possibilities, including the ability to mix and match for zoning and wayfinding. Pieces can be cut and laid to create beautiful custom installations.

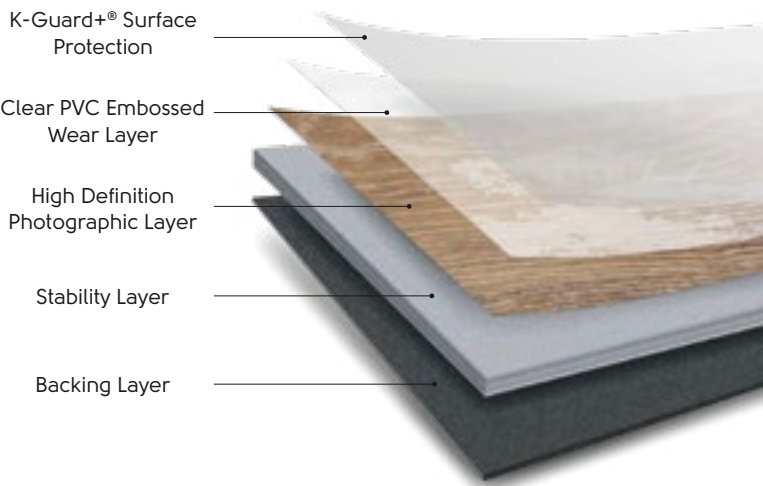


## Loose lay

Loose lay LVT combines the best features of gluedown and rigid core. Create custom installations, like gluedown, with the fast, easy installation of a non-adhesive “floating” floor.

It’s all possible because of our K-Wave® friction-grip backing, which holds the floor in place – adhesive is only required around a perimeter. Karndean LooseLay also includes SureFit™ technology for increased dimensional stability, eliminating the need for expansion gaps and transition strips.


At 4.5 mm thick, Karndean LooseLay transitions easily to most carpet tile. Although it’s made for installation as a floating floor, the product also can be fully glued down if preferred.

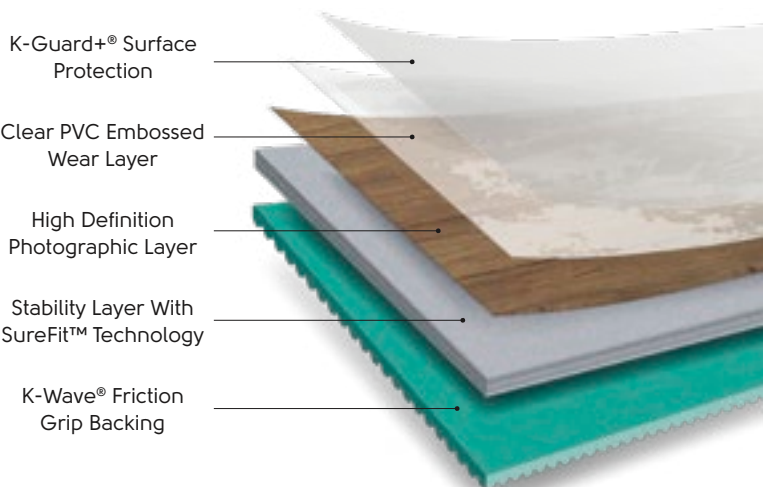

## Rigid core

Rigid core LVT is an easy-to-install “floating floor” that requires minimal site prep – pieces easily click and lock together, without the need for adhesive. Our rigid core flooring includes K-Core® technology that ensures a stable core for installation over most hard subfloors, concealing imperfections.

Rigid core also contributes to quieter environments, with a backing that reduces noise to lower floors by up to 25 dB.

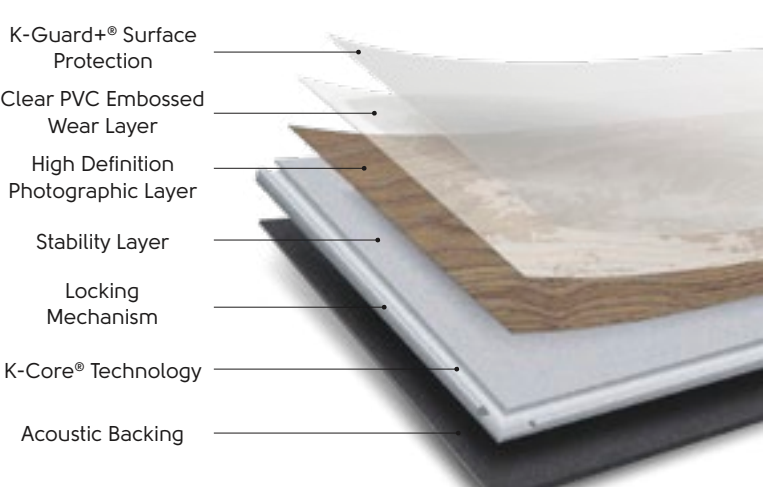

### Gluedown benefits



#### Custom layouts

Create one-of-a-kind installations, including zoning and wayfinding



#### Creative possibilities

Compatible with LVT design strips and decorative borders for more customization



#### Easy to replace

Single planks and tiles can be lifted and replaced



#### Seamless installations

No expansion gaps or transition strips needed

### Loose lay benefits



#### Fast, easy installation

K-Wave® friction-grip backing keeps flooring in place – no full-spread adhesive required



#### Quieter spaces

K-Wave® backing reduces noise to lower floors by 16 dB and provides extra cushion



#### Seamless installations

SureFit™ technology increases dimensional stability, eliminating need for expansion gaps



#### Easy to replace

Single planks and tiles can be lifted and replaced



#### Custom layouts

Create one-of-a-kind installations, including zoning and wayfinding

### Rigid core benefits



#### Fast, easy installation

Pieces easily click and lock together – no adhesive required and minimal site prep



#### K-Core® technology

Ensures a stable core for installation over most hard subfloors, concealing imperfections



#### Quieter spaces

Backing reduces noise to lower floors by up to 25 dB and provides extra cushion

# Wood-Inspired Designs

Product Collections:

■ Kortok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay



■ KP105  
■ SCB-KP105-6



■ RKP8217



■ KP133  
■ SCB-KP133-6



■ RL38  
■ AKP-RL38



■ VGW137T  
■ SCB137



■ RL45  
■ AKP-RL45




■ WP331




■ LLP95



■ KP154  
■ SCB-KP154-6




■ LLP306




■ LLP149



■ RL32  
■ AKP-RL32




■ SM-RKP8105



■ RKP8105



■ KP159  
■ SCB-KP159-6



■ RCP6546



■ LLP355



■ RKP8249




■ RL35  
■ AKP-RL35




■ LLP157



■ LLP352




■ WP432




■ RL26  
■ AKP-RL26



■ SM-RL26  
■ AKP-SM-RL26




■ RL43  
■ AKP-RL43




■ LLP353




■ RL21  
■ AKP-RL21




■ SM-RL21-28  
■ AKP-SM-RL21-28



■ RKP8236




■ VGW139T  
■ SCB139




■ LLP330




■ WP311




■ RCP6532




■ RKP8108



■ SM-RKP8116



■ RKP8116

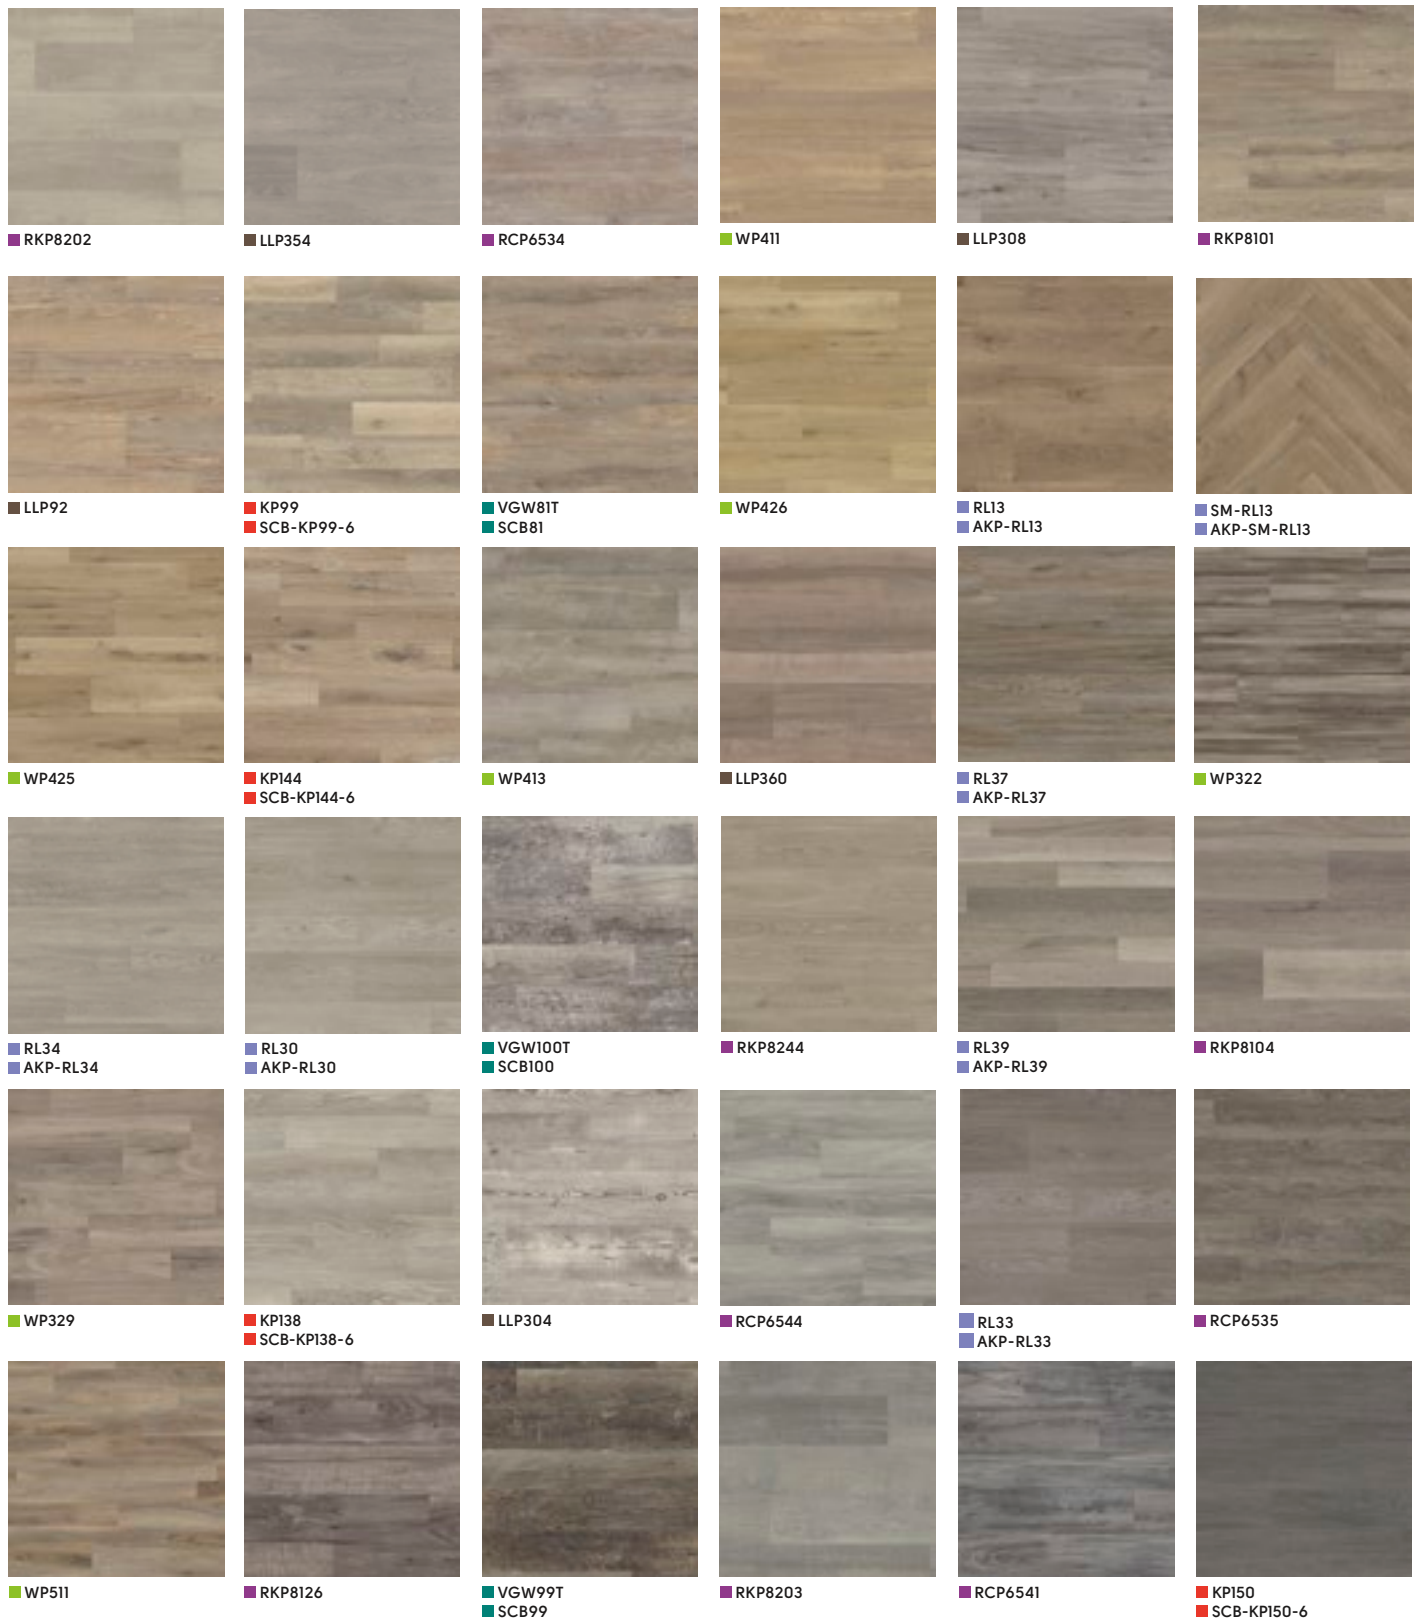





# Wood-Inspired Designs

Product Collections:

■ Kortok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay

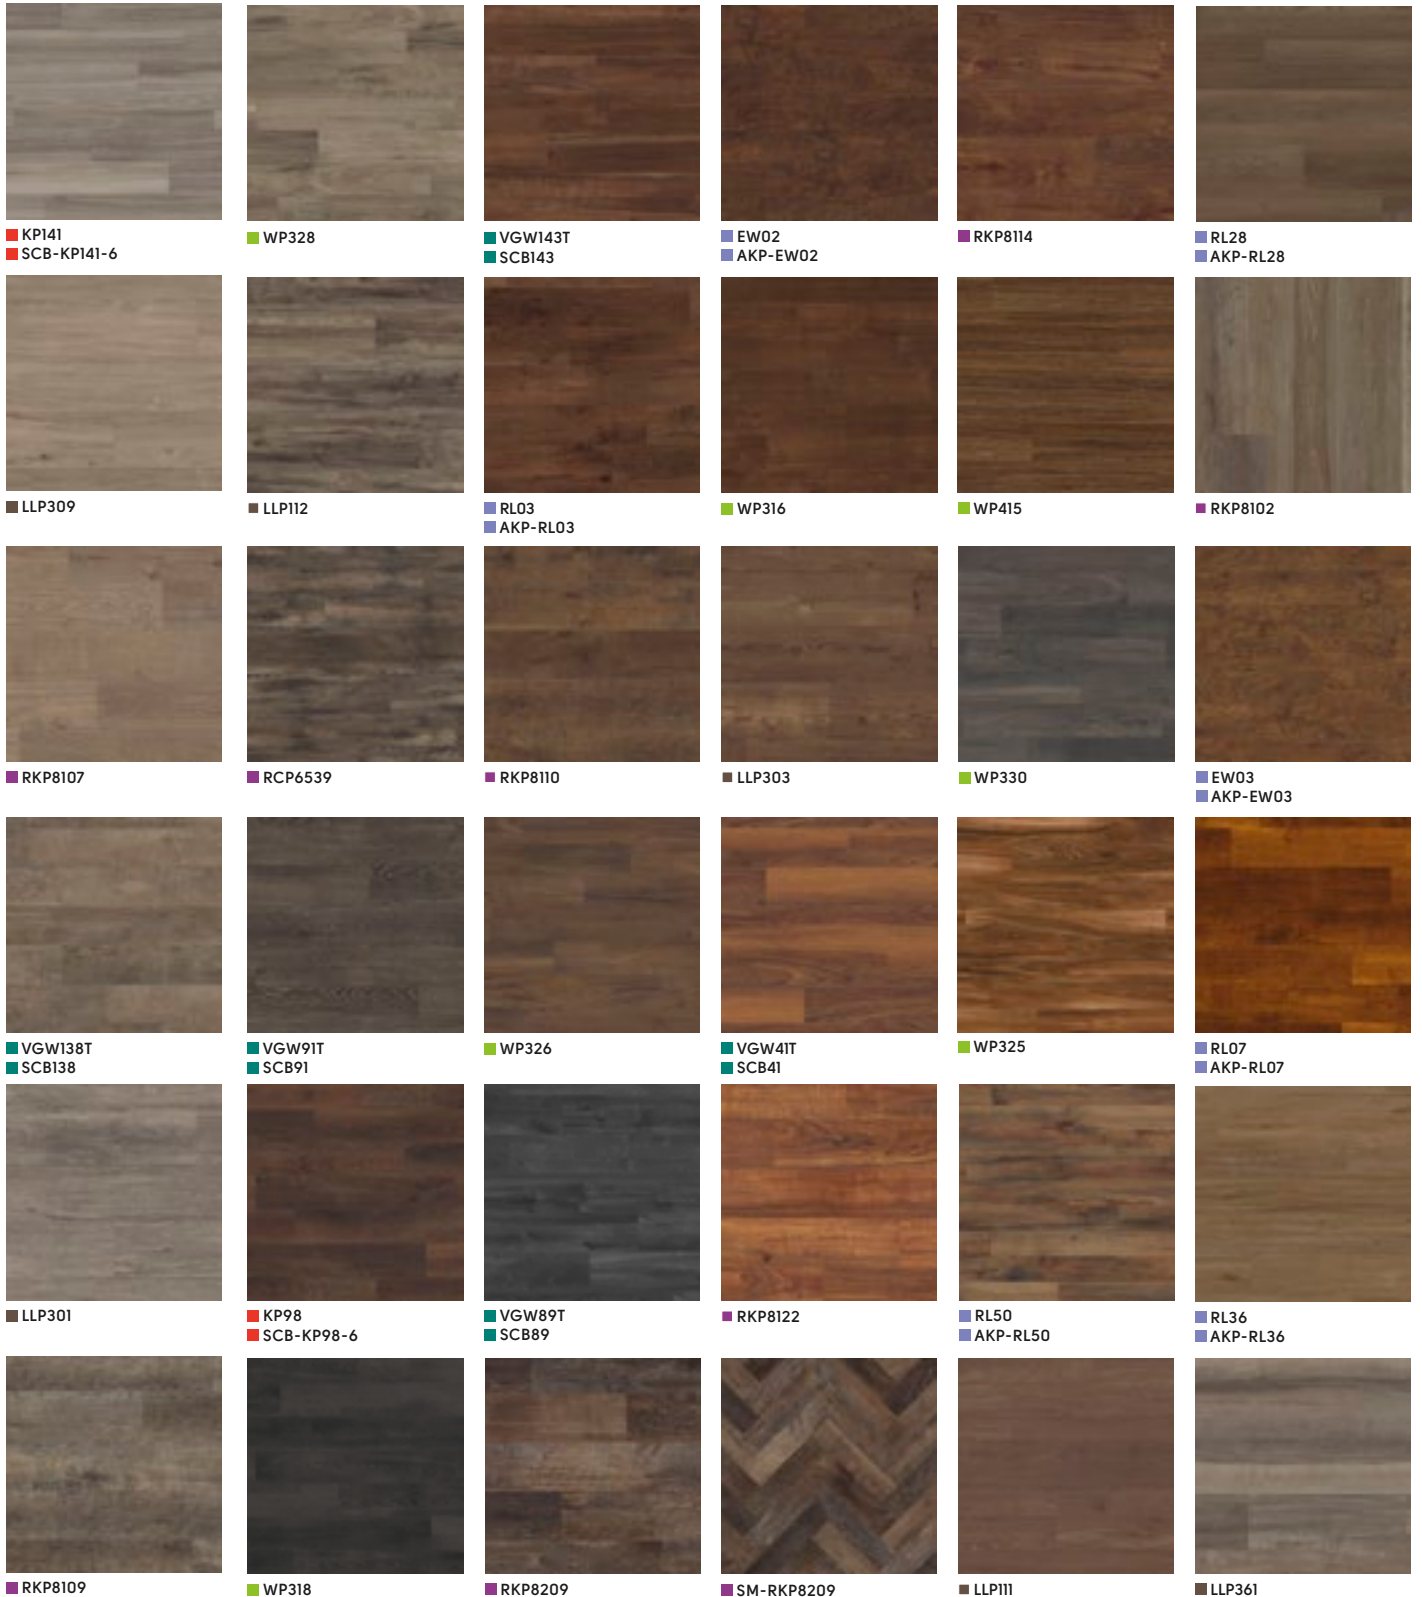


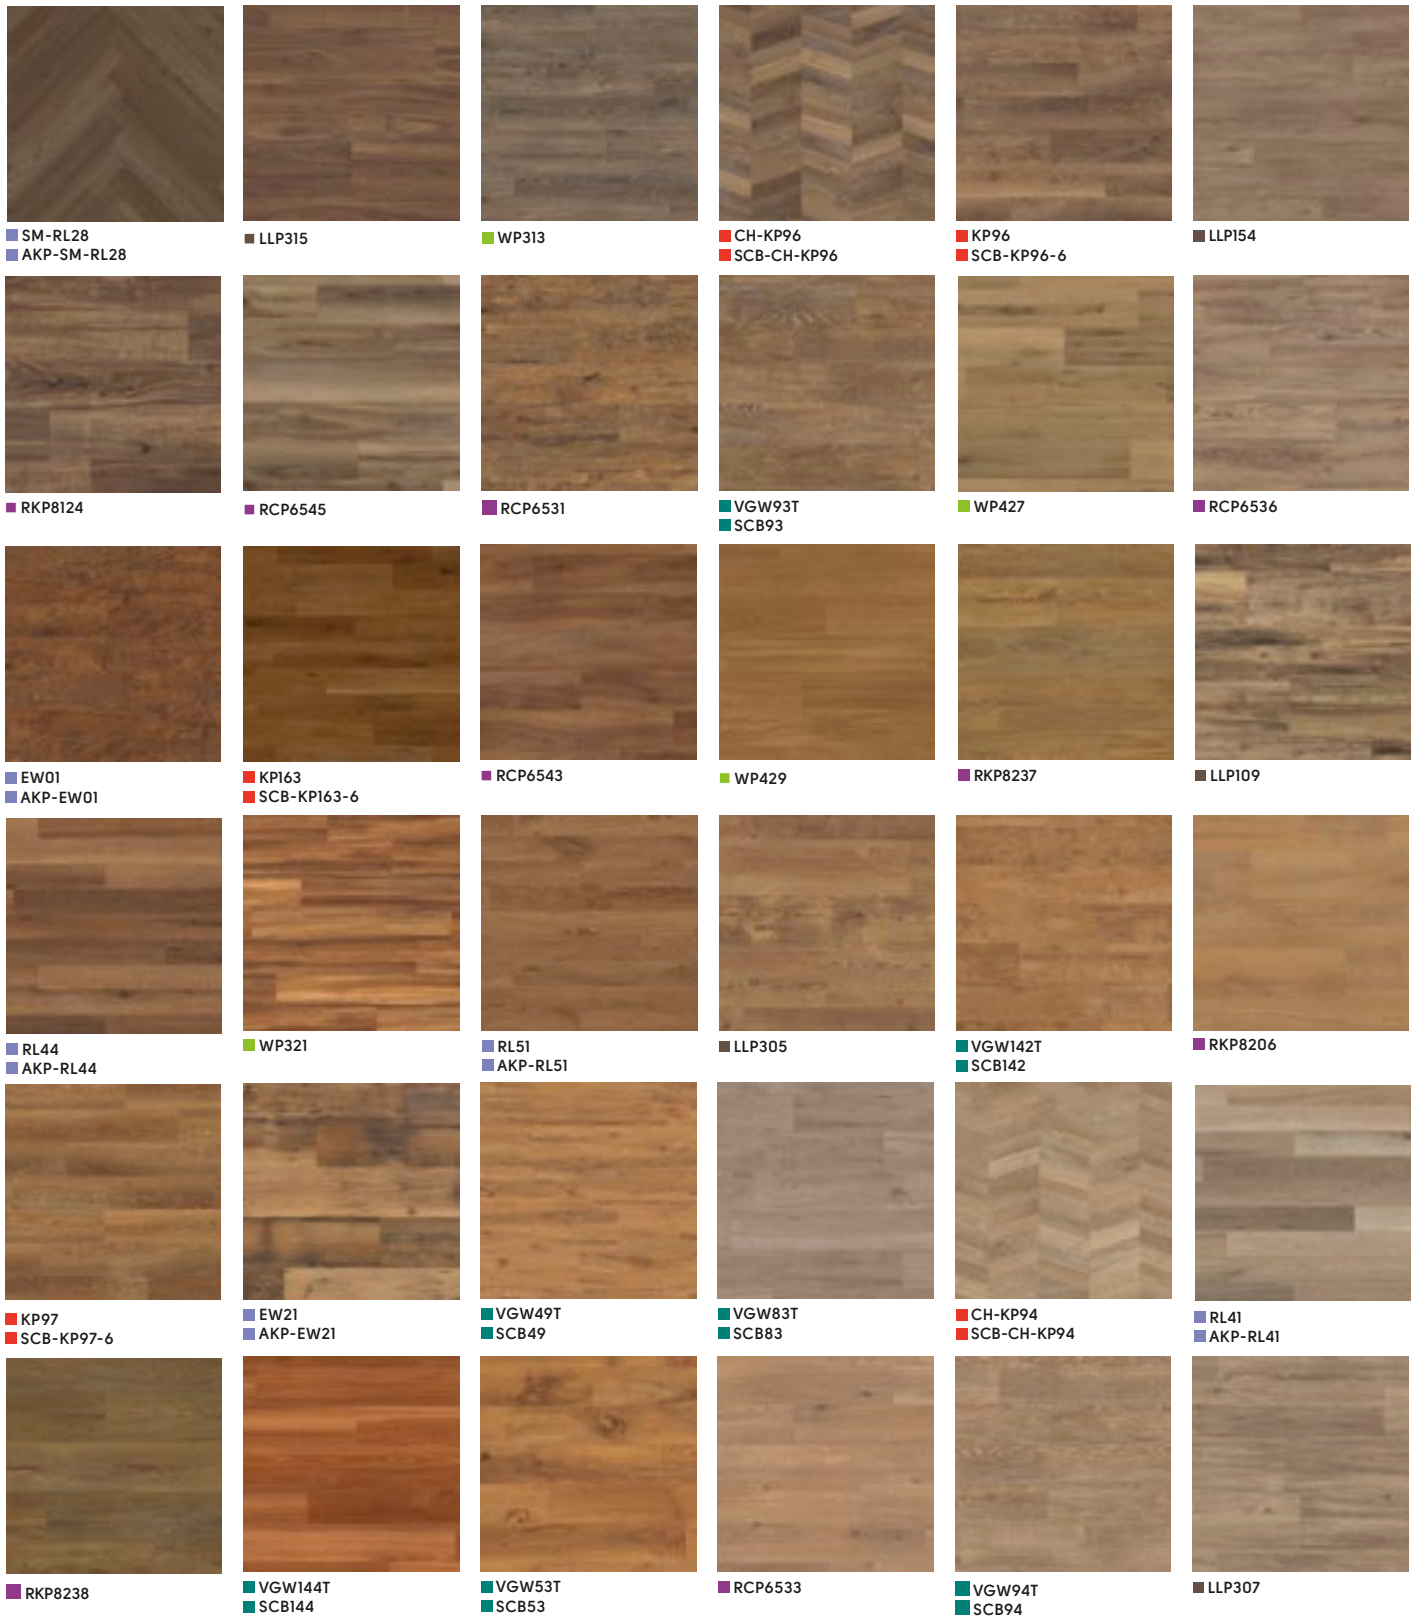


# Wood-Inspired Designs

Product Collections:


■ Kortok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay




■ VGW76T  
■ SCB76




■ VGW44T  
■ SCB44



■ LLP39



■ VGW39T  
■ SCB39




■ VGW42T  
■ SCB42



■ RL49  
■ AKP-RL49




■ VGW86T  
■ SCB86




■ WP433



■ LLP359



■ KP145  
■ SCB-KP145-6




■ VGW85T  
■ SCB85




■ LLP94




■ KP155  
■ SCB-KP155-6




■ LLP317



■ RL01  
■ AKP-RL01




■ LLP113




■ RKP8215




■ RKP8103




■ KP94  
■ SCB-KP94-6




■ RKP8111




■ RL48  
■ AKP-RL48




■ VGW115T  
■ SCB115




■ WP430




■ RKP8250




■ RL24  
■ AKP-RL24




■ LLP357



■ KP158  
■ SCB-KP158-6




■ LLP310




■ LLP358



■ LLP356



■ VGW136T  
■ SCB136



■ EW13  
■ AKP-EW13



■ RCP6552






■ Pale Limed Oak CH-KP94 | SCB-CH-KP94

# Stone-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay




■ RKT3013-G




■ SM-RKT3013-G



■ LM32  
■ AKT-LM32




■ LM33  
■ AKT-LM33



■ LM35  
■ AKT-LM35



■ RKT3021-G



■ RKT3012-G




■ SM-RKT3012-G



■ ST31  
■ SCB-ST31-G




■ SP816



■ ST17  
■ SCB-ST17-G



■ LM50  
■ AKT-LM50



■ ST18  
■ SCB-ST18-G




■ ST33  
■ SCB-ST33G




■ SP811



■ RKT2408



■ LM36  
■ AKT-LM36



■ LM37  
■ AKT-LM37



■ LM40  
■ AKT-LM40



■ LM44  
■ AKT-LM44



■ LM43  
■ AKT-LM43




■ LM30  
■ AKT-LM30



■ SP812



■ LLT218




■ LM42  
■ AKT-LM42




■ LM39  
■ AKT-LM39




■ LLT201




■ RKT3018-G



■ RKT3011-G




■ ST24  
■ SCB-ST24-G



■ LM51  
■ AKT-LM51




■ LM45  
■ AKT-LM45




■ RKT3007-G



■ ST16  
■ SCB-ST16-G



■ SP213



■ RKT2417-G






# Abstract-Inspired Designs

Product Collection:

■ Opus



■ SP731



■ SP116




■ SP220



■ SP733




■ SP734



■ SP118



■ SP729



■ SP117



■ SP724  
■ SP725



■ SP721



■ SP219



■ SP722  
■ SP723



■ SP726



■ SP719



■ MAYF-02



■ SP730




■ SP735



■ SP740



■ SP720



■ MAYF-01



■ CLIF-04




■ CLIF-01



■ SP732



■ SP727  
■ SP728

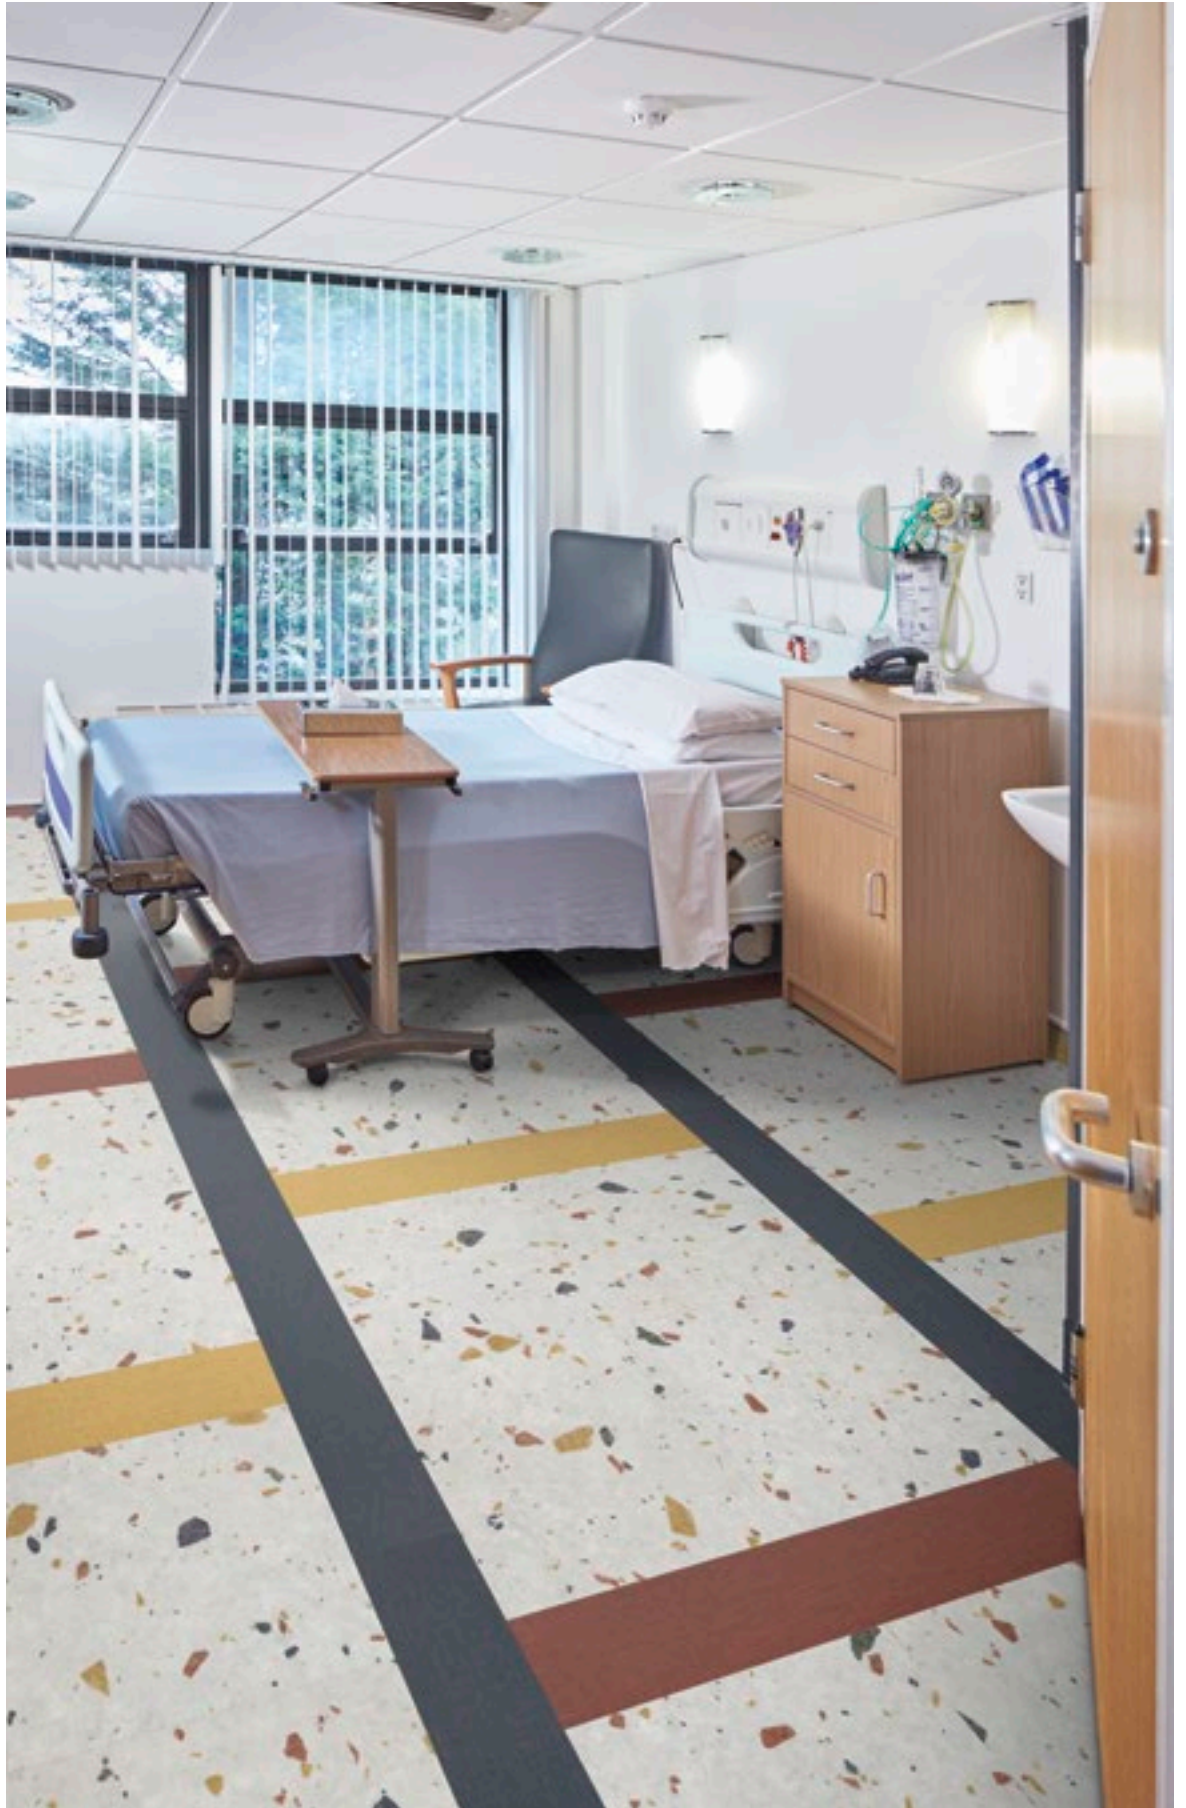

■ Salute Grigio **SP118** | Burnt Sienna **SP719** | Indigo **SP720** | Yellow Ochre **SP726**

# Art Select

This collection elevates LVT design to an artform, combining hands-on craftsmanship and cutting-edge manufacturing technology to replicate hardwood and stone flooring in breathtaking detail. Backed by a 20-year commercial warranty, the collection includes almost 50 beautifully realistic wood and stone designs – all with a top-of-the-line 30 mil wear layer, and all available in both gluedown and rigid core for installation.

Sophisticated design to commercial-grade durability, Art Select offers unparalleled style and performance.



■ Lago Quartzite **LM49** | **AKT-LM49**



### 5G® Locking Mechanism

Art Select rigid core can be installed with confidence. Backed by our HoldFast™ 20-year warranty, the 5G® locking mechanism securely locks pieces at the end seams with a single click.

| Gluedown  | Art Select          | Rigid Core   |
|---|---------------------|--|
| 36.0" x 6.0"   56.0" x 9.0"   48.0" x 7.0"<br>48.0" x 4.50"   28.0" x 4.50" | Plank Size          | 36.0" x 5.91"   55.91" x 8.86"  <br>48.03" x 7.05"   48.0" x 4.25"   28.0" x 4.25" |
| 18.0" x 18.0"   18.0" x 36.0"   18.0" x 24.0"                               | Tile Size           | 18.0" x 18.0"   18.0" x 36.0"   17.99" x 23.62"                                    |
| 30mil   | Wear Layer          | 30mil  |
| 3mm   | Thickness           | 7mm  |
| 20 years  | Commercial Warranty | 20 years   |
| Begins with EW   RL   SM-RL   LM  | Product Code        | Begins with AKP-   AKT-  |

|                                 | Standard   | Gluedown   | Rigid Core   |
|---------------------------------|--|--|--|
| Size                            | ASTM F2421   | See Product Listing<br>N/A   | N/A<br>See Product Listing   |
| Locking system <sup>1</sup>     |  | N/A  | 5G® Fold Down installation system <sup>2</sup>    |
| Thickness                       | ASTM F386<br>ASTM F387   | 3.0 mm<br>N/A  | N/A<br>7.0 mm  |
| Wear layer                      | ASTM F410  | 30 mil <sup>3</sup> (0.7 mm)   | 30 mil <sup>3</sup> (0.7 mm)   |
| Surface treatment               |  | K-Guard+® PU coating   | K-Guard+® PU coating   |
| Warranty <sup>4</sup>           | Commercial   | 20 years   | 20 years   |
| Beveled edge                    |  | Standard   | Standard   |
| Classification                  |  | ASTM 1700: Class III Type B  | ASTM F3261: Resilient flooring with Rigid Polymeric Core   |
| Reaction to fire                | ASTM E648-06   | Class I  | Class I  |
| Smoke density                   | ASTM E662-06   | Pass (<450)  | N/A  |
| Flammability test               | ASTM D2859   | Pass   | Pass   |
| Slip resistance <sup>5</sup>    | ASTM D2047   | Pass (Dry 0.80)  | Pass (Dry > 0.8)   |
| Staining resistance             | ASTM F925  | Pass   | Pass   |
| Heat fastness                   | ASTM F1514   | Pass   | Pass   |
| Light fastness                  | ASTM F1515   | Pass   | Pass   |
| Electrostatic propensity        | AATCC 134-1996   | N/A  | 1.7 kv   |
| Abrasion resistance             | ASTM D4060   | Pass (>50,000 Cycles)  | Pass (>50,000 Cycles)  |
| Dimensional stability           | ASTM F2199<br>ISO 23999  | Pass<br>N/A  | N/A<br>Pass  |
| Acoustic impact noise reduction | ASTM E2179<br>ASTM E492  | ΔIIC = 9 dB<br>IIC = 46 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  | ΔIIC = 25 dB<br>IIC = 68 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)   |
| Static load                     | ASTM F970  | Pass (1800 psi at 0.005")  | Pass (400 psi at 0.005")   |
| Indentation - residual          | ASTM F1914   | Pass   | Pass   |
| Thickness swell                 | NALFA 3.2  | N/A  | Pass (Class 4)   |
| Flexibility                     | ASTM F137  | Pass   | N/A  |
| Adhesive                        |  | DrySet<br>K-Spray<br>Karndean Epoxy<br>K99 HM  | None required; please install according to our installation instructions.  |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0<br>Environmental Product Declaration<br>NSF / ANSI 332<br><br>ISO 14001 / ISO 9001<br><br>ASSURE CERTIFIED™ | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>External third-party verified Type III EPD<br><br>Sustainability Assessment for Resilient Floor Coverings; Conformant product<br>Manufactured to quality and environment management systems standards<br>N/A | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>External third-party verified Type III EPD<br><br>Sustainability Assessment for Resilient Floor Coverings; Silver certified product<br>Manufactured to quality and environment management systems standards<br>Conformance with Rigid Core Flooring Standard SCS-0011 VI-0 |
| Recycling                       |  | Suitable   | Suitable   |
| Phthalate free                  | CPSC-C1001-09.3  | Yes  | Yes  |

<sup>1</sup> 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> 5G® along short edge; 2G™ long edge

<sup>3</sup> Nominal.

<sup>4</sup> Subject to terms. Please see our website.

<sup>5</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



# Art Select **Wood Designs**

Gluedown: 28.0" x 4.50" (35ft<sup>2</sup> per box) | Rigid Core\*: 28.0" x 4.25" (24.79ft<sup>2</sup> per box)




Basque Oak - Accent Plank  
Gluedown **SM-RL26** | Rigid Core **AKP-SM-RL26**  
Image of full-sized plank on page 41



Glacier Oak - Accent Plank  
Gluedown **SM-RL21-28** | Rigid Core **AKP-SM-RL21-28**  
Image of full-sized plank on page 41



Salon Oak - Accent Plank  
Gluedown **SM-RL13** | Rigid Core **AKP-SM-RL13**  
Image of full-sized plank on page 39

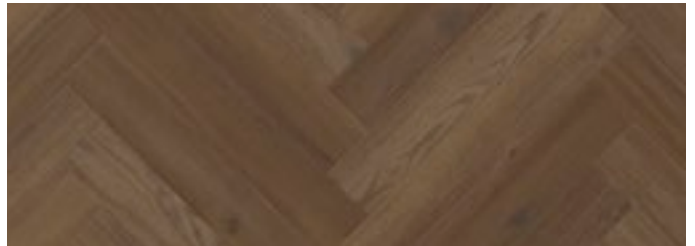

Serrano Oak - Accent Plank  
Gluedown **SM-RL28** | Rigid Core **AKP-SM-RL28**  
Image of full-sized plank on page 40



■ Basque Oak **SM-RL26** | **AKP-SM-RL26**



Available in gluedown and rigid core installation formats.


\*These SKUs can only be laid in a herringbone pattern.



Gluedown: 36.0" x 6.0" (36ft² per box) | Rigid Core: 36.0" x 5.91" (23.62ft² per box)



Hickory Paprika  
Gluedown **EW01**  
Rigid Core **AKP-EW01**

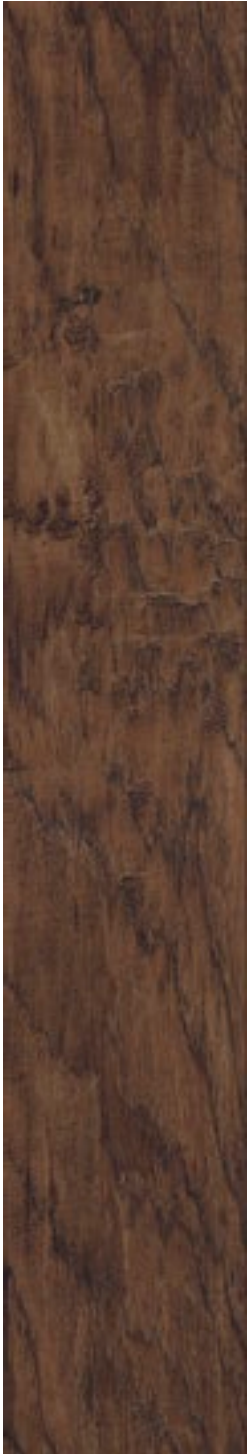

Hickory Nutmeg  
Gluedown **EW03**  
Rigid Core **AKP-EW03**



Hickory Peppercorn  
Gluedown **EW02**  
Rigid Core **AKP-EW02**

Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Wood Designs**

Gluedown: 48.0" x 4.50" (36ft² per box) | Rigid Core: 48.0" x 4.25" (25.5ft² per box)



Canadian Maple  
Gluedown **RL49**  
Rigid Core **AKP-RL49**




Canterbury Ash  
Gluedown **RL41**  
Rigid Core **AKP-RL41**



Natural Oak  
Gluedown **RL48**  
Rigid Core **AKP-RL48**



Lorenzo Warm Oak  
Gluedown **RL51**  
Rigid Core **AKP-RL51**

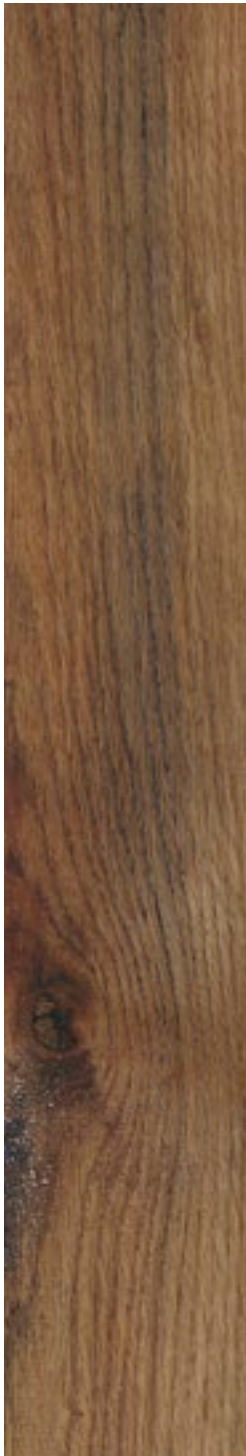

Blended Oak  
Gluedown **RL50**  
Rigid Core **AKP-RL50**



Available in gluedown and rigid core installation formats.




Golden Kent Ash  
Gluedown **RL44**  
Rigid Core **AKP-RL44**



Belmont Hickory  
Gluedown **RL45**  
Rigid Core **AKP-RL45**



Fieldstone Ash  
Gluedown **RL43**  
Rigid Core **AKP-RL43**

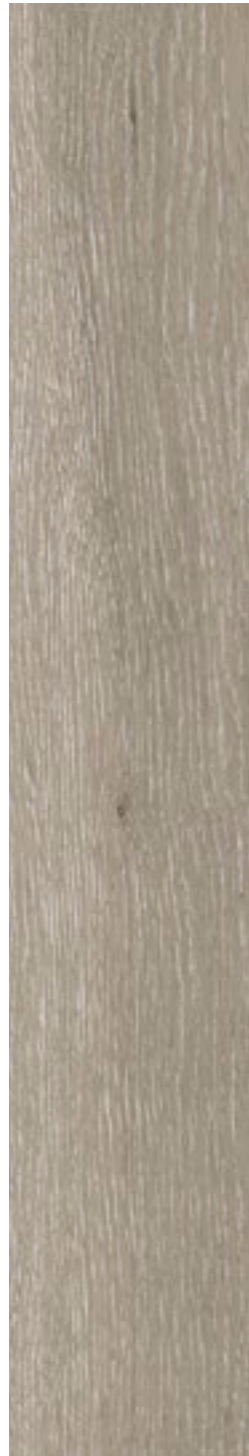

Castle Hill Ash  
Gluedown **RL39**  
Rigid Core **AKP-RL39**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Art Select **Wood Designs**

Gluedown: 48.0" x 7.0" (35ft² per box) | Rigid Core: 48.03" x 7.05" (23.51ft² per box)



Spring Oak  
Gluedown **RL01**  
Rigid Core **AKP-RL01**



Merino Oak  
Gluedown **RL36**  
Rigid Core **AKP-RL36**



Autumn Oak  
Gluedown **RL03**  
Rigid Core **AKP-RL03**



Santina Cherry  
Gluedown **RL07**  
Rigid Core **AKP-RL07**



Cotton Oak  
Gluedown **RL38**  
Rigid Core **AKP-RL38**



Available in gluedown and rigid core installation formats.





Damask Oak  
Gluedown **RL35**  
Rigid Core **AKP-RL35**



Canvas Oak  
Gluedown **RL34**  
Rigid Core **AKP-RL34**



Salon Oak  
Gluedown **RL13**  
Rigid Core **AKP-RL13**



Tweed Oak  
Gluedown **RL37**  
Rigid Core **AKP-RL37**

**Disclaimer: color and pattern reproduction**


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Wood Designs**

Gluedown: 56.0" x 9.0" (35ft² per box) | Rigid Core: 55.91" x 8.86" (27.51ft² per box)




Classic Hickory  
Gluedown **EW13**  
Rigid Core **AKP-EW13**

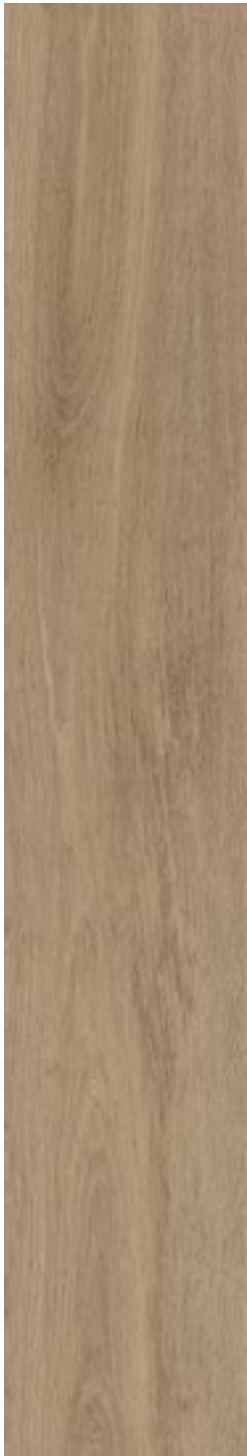

Dune Oak  
Gluedown **RL24**  
Rigid Core **AKP-RL24**



Reclaimed Chestnut  
Gluedown **EW21**  
Rigid Core **AKP-EW21**

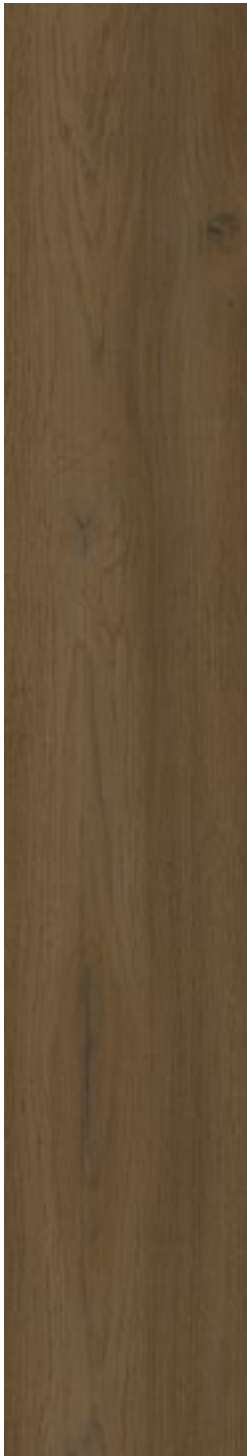

Serrano Oak  
Gluedown **RL28**  
Rigid Core **AKP-RL28**



Pale Artisan Oak  
Gluedown **RL32**  
Rigid Core **AKP-RL32**



Available in gluedown and rigid core installation formats.



Basque Oak  
Gluedown **RL26**  
Rigid Core **AKP-RL26**



Glacier Oak  
Gluedown **RL21**  
Rigid Core **AKP-RL21**



Dove Artisan Oak  
Gluedown **RL30**  
Rigid Core **AKP-RL30**



Grey Artisan Oak  
Gluedown **RL33**  
Rigid Core **AKP-RL33**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Stone** Designs

Gluedown: 18.0" x 24.0" (36ft² per box) | Rigid Core: 17.99" x 23.62" (23.61ft² per box)



Alpine Quartzite  
Gluedown **LM50**  
Rigid Core **AKT-LM50**

Gluedown: 18.0" x 18.0" (36ft² per box) | Rigid Core: 18.0" x 18.0" (22.50ft² per box)



Doric Marble  
Gluedown **LM32**  
Rigid Core **AKT-LM32**




Sterling Quartzite  
Gluedown **LM51**  
Rigid Core **AKT-LM51**



Ionic Marble  
Gluedown **LM30**  
Rigid Core **AKT-LM30**



Lago Quartzite  
Gluedown **LM49**  
Rigid Core **AKT-LM49**

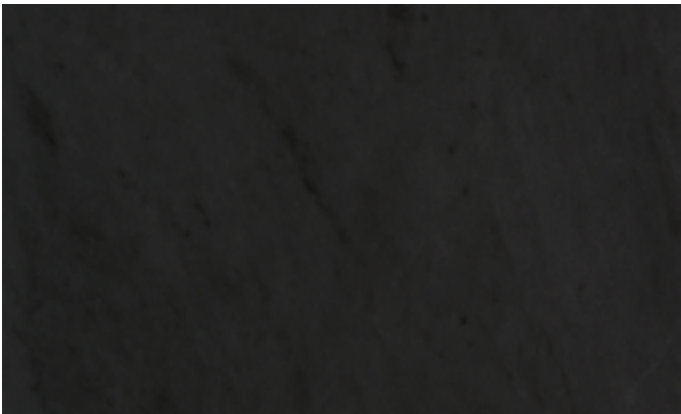

Corinthian Marble  
Gluedown **LM31**  
Rigid Core **AKT-LM31**



Available in gluedown and rigid core installation formats.





■ Doric Marble **LM32** | Ionic Marble **LM30** | Corinthian Marble **LM31**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Stone** Designs

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box) | Rigid Core: 18.0" x 36.0" (271ft<sup>2</sup> per box)



Pearl Onyx  
Gluedown **LM35**  
Rigid Core **AKT-LM35**



Silk Travertino  
Gluedown **LM37**  
Rigid Core **AKT-LM37**




Calacatta d'Oro  
Gluedown **LM33**  
Rigid Core **AKT-LM33**



Pavimento Crema  
Gluedown **LM40**  
Rigid Core **AKT-LM40**



Brezza Ceppo  
Gluedown **LM43**  
Rigid Core **AKT-LM43**

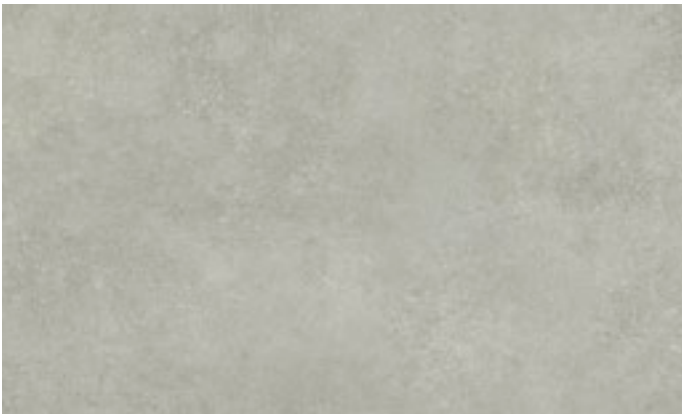

Pavimento Bianco  
Gluedown **LM42**  
Rigid Core **AKT-LM42**




Available in gluedown and rigid core installation formats.



Caliza Classico  
Gluedown **LM39**  
Rigid Core **AKT-LM39**



Rose Onyx  
Gluedown **LM36**  
Rigid Core **AKT-LM36**

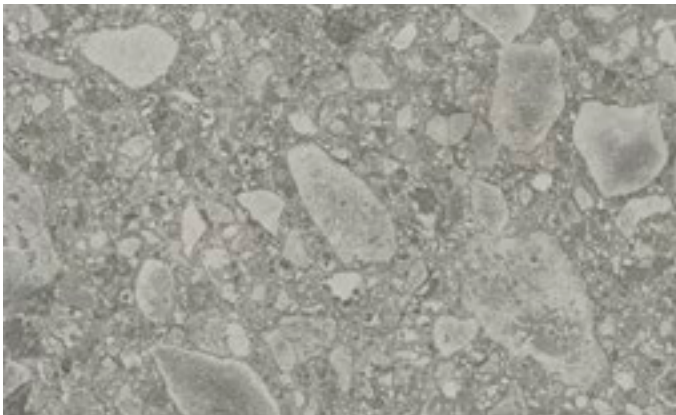

Naturale Ceppo  
Gluedown **LM45**  
Rigid Core **AKT-LM45**



Sabbia Ceppo  
Gluedown **LM44**  
Rigid Core **AKT-LM44**



Champagne Travertino  
Gluedown **LM38**  
Rigid Core **AKT-LM38**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh

From painted oak floorboards found in a Holland farmhouse to cedar planks salvaged from a school in San Diego, our Van Gogh collection is inspired by wood samples from around the world, lovingly crafted to capture the distinctive textures and grain details that make them unique.



■ Vintage Pine **VGW76T** | **SCB76**

| Gluedown        | Van Gogh            | Rigid Core      |
|-----------------|---------------------|-----------------|
| 48.0" x 7.0"    | Plank Size          | 48.03" x 7.09"  |
| 20mil           | Wear Layer          | 20mil           |
| 3mm             | Thickness           | 4.5mm           |
| 15 years        | Commercial Warranty | 15 years        |
| Begins with VGW | Product Code        | Begins with SCB |



|                                 | Standard   | Gluedown   | Rigid Core  |
|---------------------------------|--|--|---|
| Size                            | ASTM F2421   | See Product Listing  | See Product Listing   |
| Thickness                       | ASTM F386<br>ASTM F387   | 3.0 mm<br>N/A  | N/A<br>4.5 mm   |
| Locking system <sup>1</sup>     |  | N/A  | Click locking system  |
| Wear layer                      | ASTM F410  | 20 mil (0.50 mm)   | 20 mil (0.50 mm)  |
| Surface treatment               |  | K-Guard+® PU coating   | K-Guard+® PU coating  |
| Warranty <sup>2</sup>           | Commercial   | 15 Years   | 15 Years  |
| Beveled edge                    |  | Micro  | Micro   |
| Classification                  | ASTM F1700<br>ASTM F3261   | Class III Type B<br>N/A  | N/A<br>Pass: Resilient flooring with Rigid Polymeric Core   |
| Reaction to fire                | ASTM E648-06   | Class 1  | Class 1   |
| Smoke density                   | ASTM E662-06   | Pass (< 450)   | Pass (< 450)  |
| Flammability test               | ASTM D2859   | Pass   | Pass  |
| Slip resistance <sup>3</sup>    | ASTM D2047   | Pass (Dry 0.89)  | Pass (Dry 0.8)  |
| Staining resistance             | ASTM F925  | Pass   | Pass  |
| Heat fastness                   | ASTM F1514   | Pass   | Pass  |
| Light fastness                  | ASTM F1515   | Pass   | Pass  |
| Electrostatic propensity        | AATCC 134-1996   | N/A  | 1.1 kV  |
| Abrasion resistance             | ASTM D4060   | Pass (25,000 cycles)   | Pass (20,000 Cycles)  |
| Dimensional stability           | ASTM F2199<br>ISO 23999  | Pass<br>N/A  | N/A<br>Pass   |
| Acoustic impact noise reduction | ASTM E2179-09<br>ASTM E492-09  | $\Delta$ IIC = 6 dB<br>IIC = 46 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  | $\Delta$ IIC = 22 dB<br>IIC = 69 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  |
| Static load                     | ASTM F970  | Pass (1,000 psi at 0.005")   | Pass (600 psi at 0.005")  |
| Indentation - residual          | ASTM F1914   | Pass   | Pass  |
| Flexibility                     | ASTM F137  | Pass   | N/A   |
| Adhesive                        |  | DrySet<br>K-Spray<br>Karndean Epoxy<br>K99 HM  | None required; please install according to our installation instructions.   |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0<br>Environmental Product Declaration<br>NSF / ANSI 332<br><br>ISO 14001 / ISO 9001<br><br>ASSURE CERTIFIED™ | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>External third-party verified Type III EPD<br><br>Sustainability Assessment for Resilient Floor Coverings; Silver certified product<br>Manufactured to quality and environment management systems standards<br>N/A | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>N/A<br><br>N/A<br><br>Manufactured to quality and environment management systems standards<br>Conformance with Rigid Core Flooring Standard SCS-0011 V1-0 |
| Recycling                       |  | Suitable   | Suitable  |
| Phthalate free                  | CPSC-C-1001-09.3   | Yes  | Yes   |

<sup>1</sup> Produced under license from Flooring Industries

<sup>2</sup> Subject to terms. Please see our website.


<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Van Gogh **Wood Designs**

Gluedown: 48.0" x 7.0" (35ft<sup>2</sup> per box) | Rigid Core: 48.03" x 7.09" (23.64ft<sup>2</sup> per box)




Natural Prime Oak  
Gluedown **VGW115T**  
Rigid Core **SCB115**

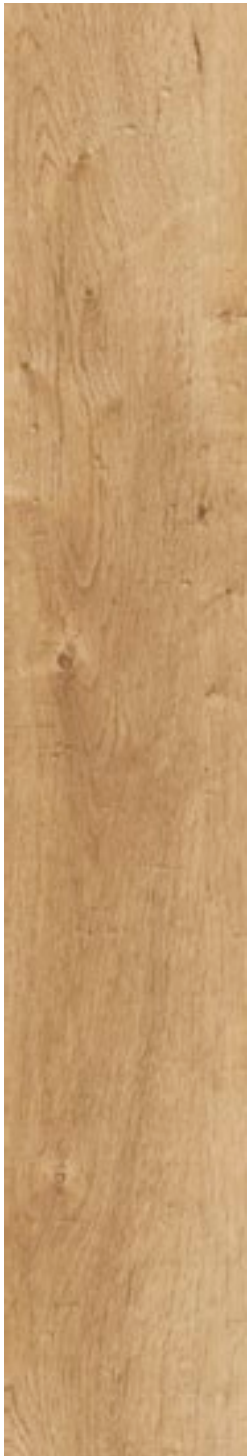


French Oak  
Gluedown **VGW85T**  
Rigid Core **SCB85**



Honey Oak  
Gluedown **VGW94T**  
Rigid Core **SCB94**

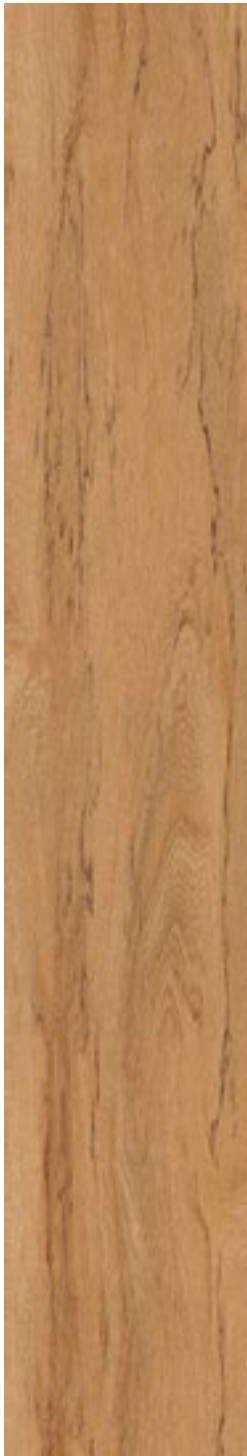

Rimu  
Gluedown **VGW49T**  
Rigid Core **SCB49**

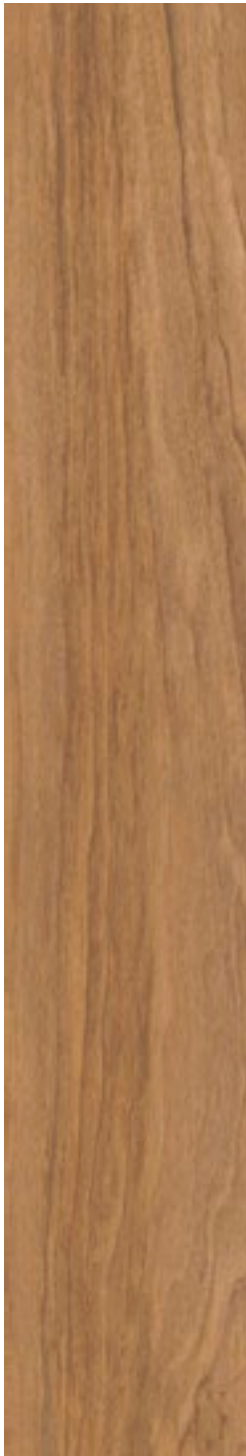


Lancewood  
Gluedown **VGW44T**  
Rigid Core **SCB44**



Available in gluedown and rigid core installation formats.



Natural School Cedar  
Gluedown **VGW142T**  
Rigid Core **SCB142**

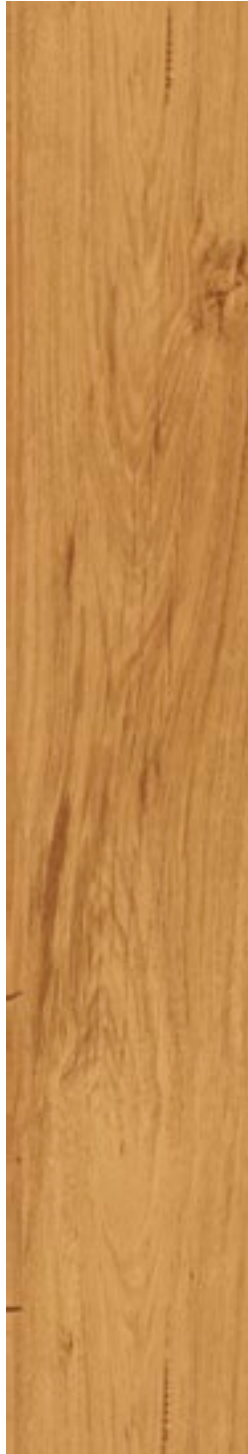

Antique Karri  
Gluedown **VGW39T**  
Rigid Core **SCB39**



Vintage Pine  
Gluedown **VGW76T**  
Rigid Core **SCB76**

**Disclaimer: color and pattern reproduction**


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh **Wood Designs**


Gluedown: 48.0" x 7.0" (35ft² per box) | Rigid Core: 48.03" x 7.09" (23.64ft² per box)



Wellington Oak  
Gluedown **VGW53T**  
Rigid Core **SCB53**

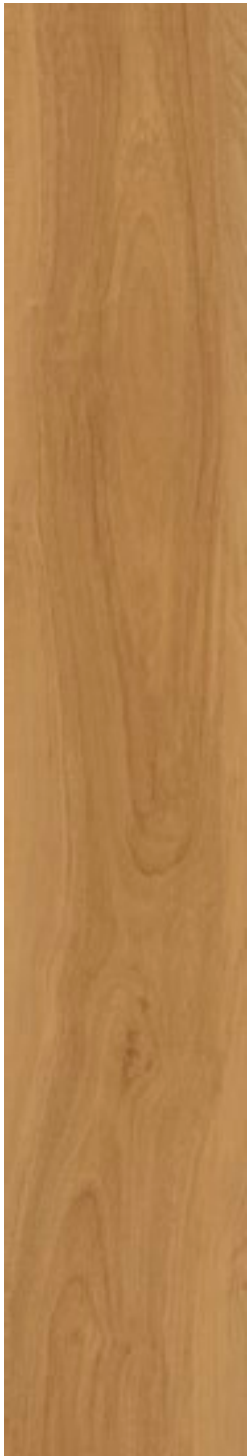


Jatoba  
Gluedown **VGW42T**  
Rigid Core **SCB42**

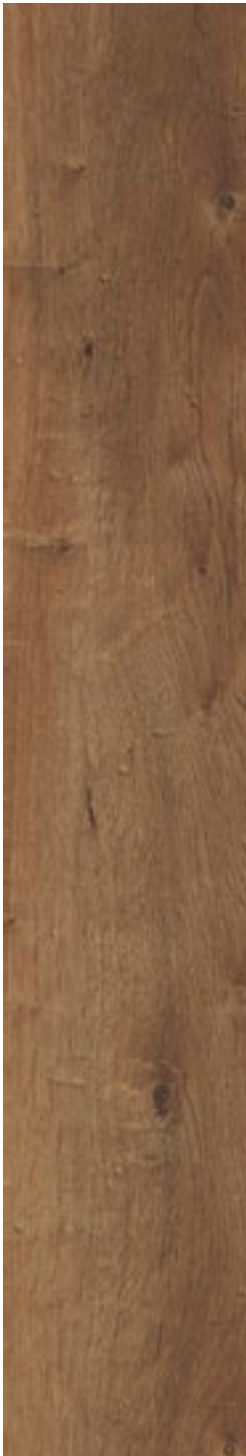

Classic Oak  
Gluedown **VGW86T**  
Rigid Core **SCB86**



Hessian Oak  
Gluedown **VGW93T**  
Rigid Core **SCB93**

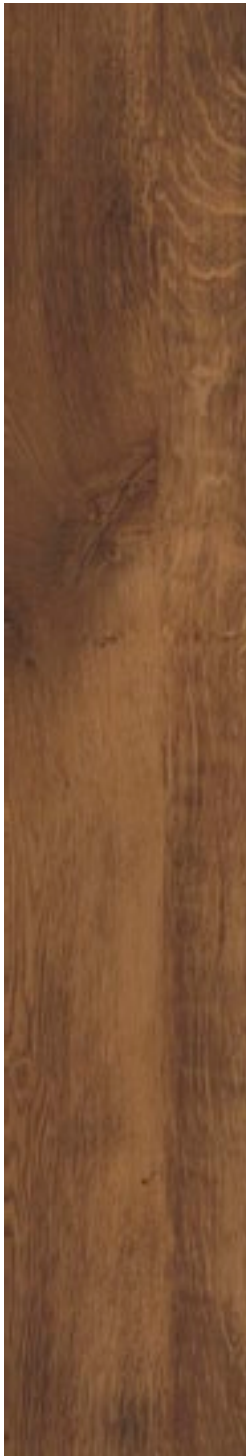


Smoked Oak  
Gluedown **VGW70T**  
Rigid Core **SCB70**



Available in gluedown and rigid core installation formats.




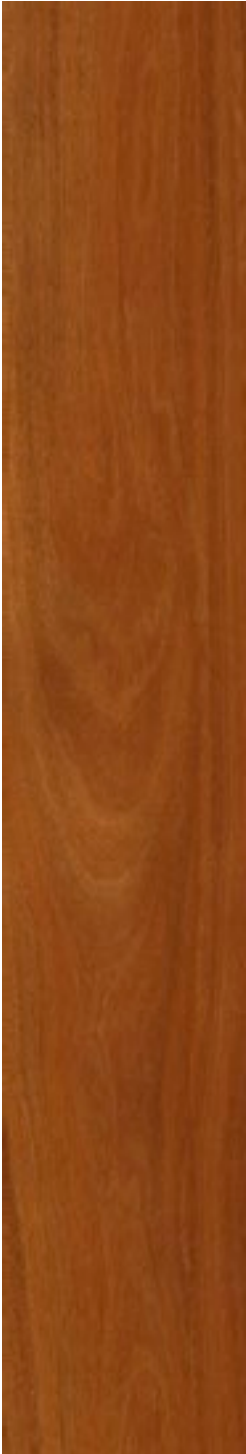

Auburn Spotted Gum  
Gluedown **VGW144T**  
Rigid Core **SCB144**



Merbau  
Gluedown **VGW41T**  
Rigid Core **SCB41**

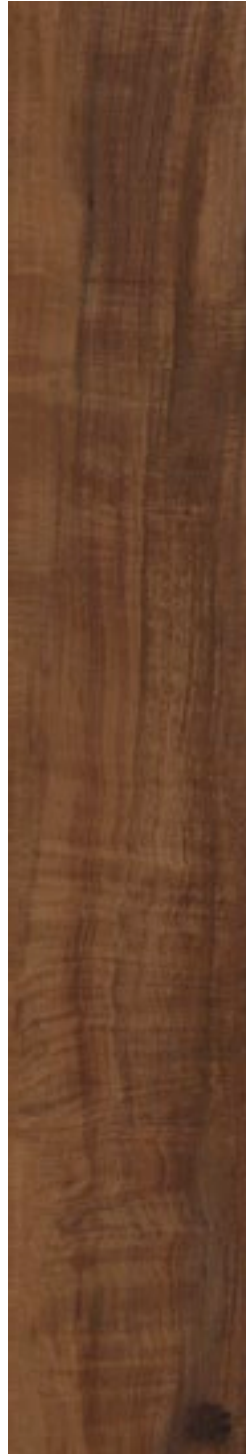

Ohana Koa  
Gluedown **VGW143T**  
Rigid Core **SCB143**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh **Wood Designs**

Gluedown: 48.0" x 7.0" (35ft² per box) | Rigid Core: 48.03" x 7.09" (23.64ft² per box)



Silver Farmhouse Oak  
Gluedown **VGW137T**  
Rigid Core **SCB137**



Country Oak  
Gluedown **VGW81T**  
Rigid Core **SCB81**



Light Country Oak  
Gluedown **VGW139T**  
Rigid Core **SCB139**



Blond Farmhouse Oak  
Gluedown **VGW136T**  
Rigid Core **SCB136**



Aged Redwood  
Gluedown **VGW100T**  
Rigid Core **SCB100**




Available in gluedown and rigid core installation formats.




Frosted Birch  
Gluedown **VGW83T**  
Rigid Core **SCB83**



Smoked School Cedar  
Gluedown **VGW138T**  
Rigid Core **SCB138**

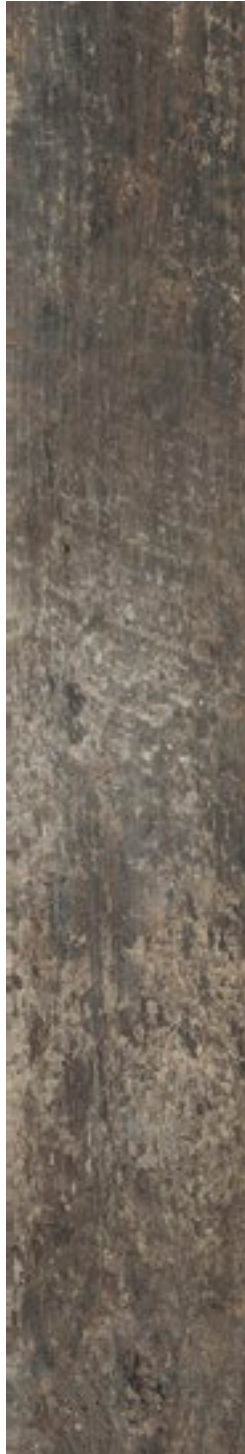

Reclaimed Redwood  
Gluedown **VGW99T**  
Rigid Core **SCB99**

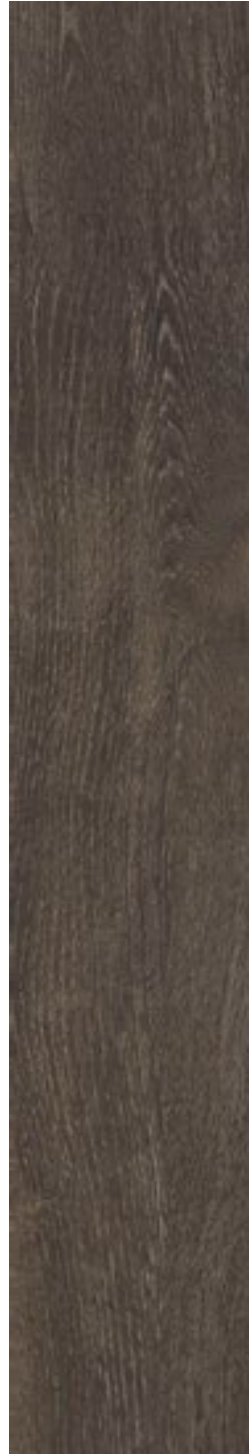

Tawny Oak  
Gluedown **VGW91T**  
Rigid Core **SCB91**



Ebony  
Gluedown **VGW89T**  
Rigid Core **SCB89**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Opus

With designs that skew modern and contemporary, the Opus collection dramatically expands the creative palette beyond wood- and stone-inspired looks to abstracts, geometric shapes and solid colors.



■ Indigo SP720 | Zinc SP722 | Contarini SP734

| Opus                | Gluedown  |
|---------------------|---|
| Plank Size          | 48.0" x 9.0"   36.0" x 6.0"   36.0" x 4.0"                                    |
| Tile Size           | 3.0" x 18.0"   18.0" x 18.0"<br>18.0" x 24.0"   18.0" x 36.0"   24.0" x 24.0" |
| Abstract Sizes      | 18.0" x 24.0"   6.0" x 36.0"<br>18.0" x 36.0"   9.0" x 9.0"   12.0" x 12.0"   |
| Wear Layer          | 20mil   |
| Thickness           | 3mm   |
| Commercial Warranty | 15 years  |
| Product Code        | Begins with WP   SP   SM-SP   CLIF   MAYF                                     |

|                                 | Standard   | Gluedown   |
|---------------------------------|--|--|
| Size                            | ASTM F2421   | See Product Listings   |
| Thickness                       | ASTM F386  | 2.5 mm   |
| Wear layer                      | ASTM F410  | 20 mil (0.50 mm)   |
| Surface treatment               |  | K-Guard+® PU coating   |
| Warranty <sup>1</sup>           | Commercial   | 15 years   |
| Beveled edge                    |  | Micro  |
| Classification                  | ASTM F1700   | Class III Type B   |
| Reaction to fire                | ASTM E648-06   | Class 1  |
| Smoke density                   | ASTM E662-06   | Pass (< 450)   |
| Flammability test               | FF 1-70; Federal Approved  | Pass   |
| Slip resistance <sup>2</sup>    | ASTM D2047   | Pass (Dry 0.89)  |
| Light fastness                  | ASTM F1515   | Pass<br>ΔE = 5.0   |
| Abrasion resistance             | ASTM D3884   | 124,000 Cycles   |
| Dimensional stability           | ASTM F2199   | Pass   |
| Acoustic impact noise reduction | ASTM E2179-09<br>ASTM E492-09  | ΔIIC = 4 dB<br>IIC = 44 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  |
| Static load                     | ASTM F970  | 2,000 psi  |
| Flexibility                     | ASTM F137  | Pass   |
| Adhesive                        |  | DrySet<br>K-Spray<br>Karndean Epoxy<br>K99 HM  |
| Environmental                   | Indoor Air Comfort<br>Floorscore SCS-EC10.3-2014 v4.0<br>Environmental Product Declaration<br>NSF/ANSI 332<br>ISO 14001 / ISO 9001 | Gold certification<br>Compliant low emitting VOC emissions.<br>Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>External third-party verified Type III EPD<br>Sustainability Assessment for Resilient Floor Coverings;<br>Conformant product<br>Manufactured to quality and environment<br>management systems standards |
| Recycling                       |  | Suitable   |
| Phthalate free                  | CPSC-C1001-09.3  | Yes  |

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Opus Wood Designs

Gluedown: 48.0" x 9.0" (36ft² per box)



AVAILABLE IN 2025

Rhine Oak  
Gluedown **WP432**



Niveus  
Gluedown **WP411**



AVAILABLE IN 2025

Mosel Oak  
Gluedown **WP430**



AVAILABLE IN 2025

Vermeer Oak  
Gluedown **WP427**




AVAILABLE IN 2025

Bronze Teak  
Gluedown **WP433**



Available in a gluedown installation format.

AVAILABLE IN 2025

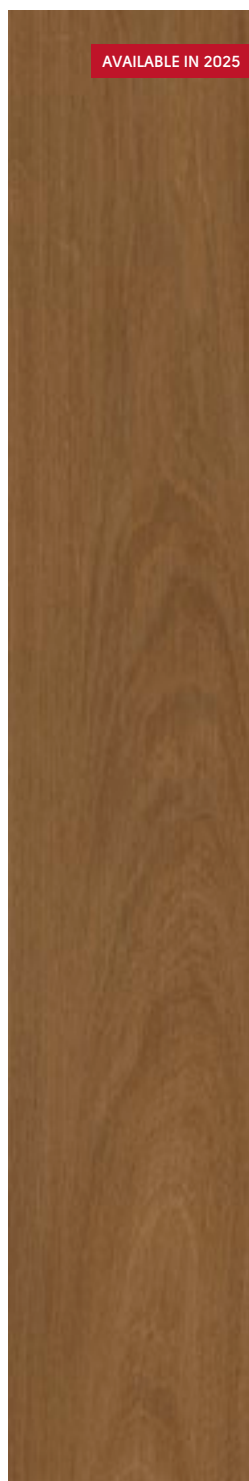

Barolo Oak  
Gluedown **WP429**



Ordo  
Gluedown **WP415**



■ Barolo Oak **WP429**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Opus Wood Designs

Gluedown: 48.0" x 9.0" (36ft² per box)



AVAILABLE IN 2025



AVAILABLE IN 2025



Leyster Oak  
Gluedown **WP425**

Steen Oak  
Gluedown **WP426**

Magna  
Gluedown **WP413**

Argen  
Gluedown **WP414**



Available in a gluedown installation format.

Gluedown: 36.0" x 6.0" (36ft² per box)



Textum  
Gluedown **WP331**



Grano  
Gluedown **WP311**



Tenebra Walnut  
Gluedown **WP330**




Carbo  
Gluedown **WP318**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Wood Designs

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box)

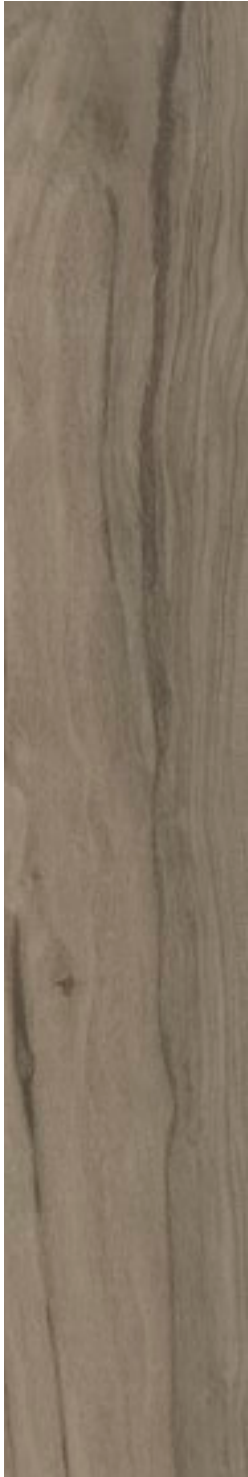

Bleached Grey Walnut  
Gluedown **WP329**




Washed Walnut  
Gluedown **WP328**



Ignea  
Gluedown **WP313**



Canitia  
Gluedown **WP322**

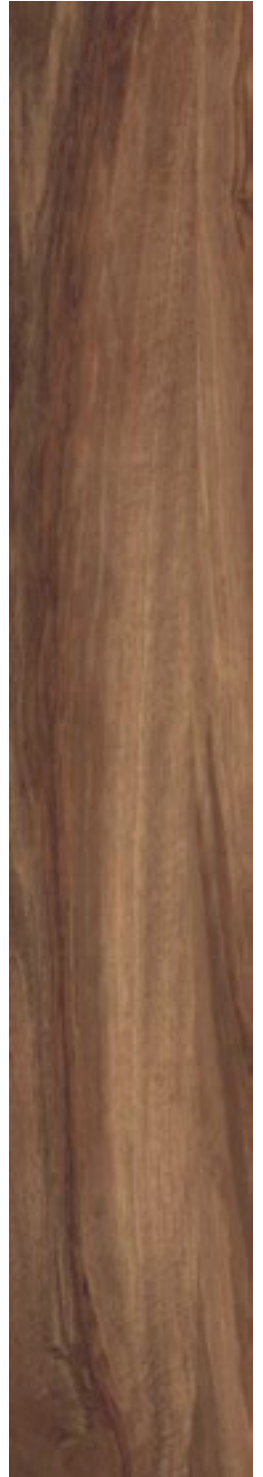

Arrado  
Gluedown **WP325**




Available in a gluedown installation format.

Gluedown: 36.0" x 4.0"  
(36ft<sup>2</sup> per box)



Luteus  
Gluedown **WP321**

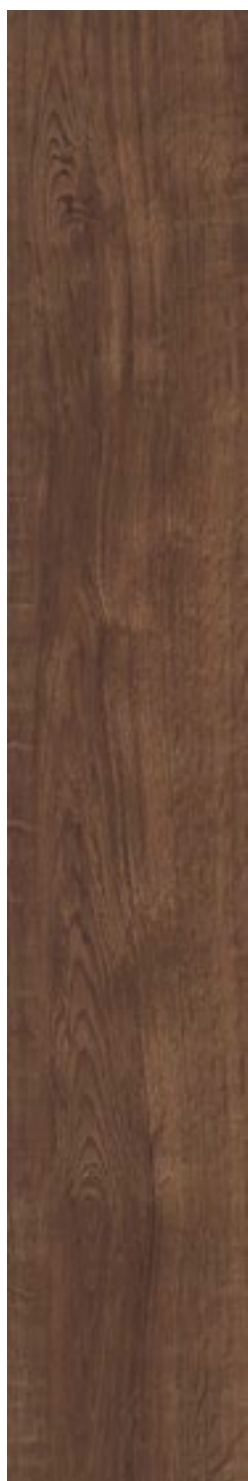

Rubra  
Gluedown **WP316**



Natural Walnut  
Gluedown **WP326**



Weathered Elm  
Gluedown **WP511**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Opus Stone Designs

Gluedown: 18.0" x 24.0" (36ft<sup>2</sup> per box)




Terra  
Gluedown **SP212**



Urbus  
Gluedown **SP213**




Fumo  
Gluedown **SP216**

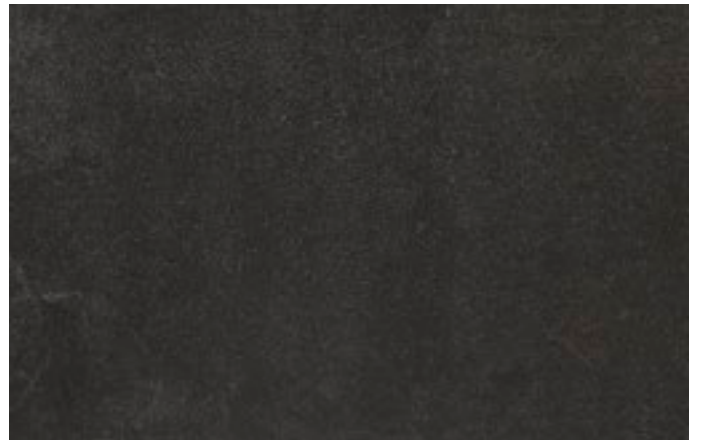

Lutum  
Gluedown **SP218**

---

Gluedown: 3.0" x 18.0" (36ft<sup>2</sup> per box)

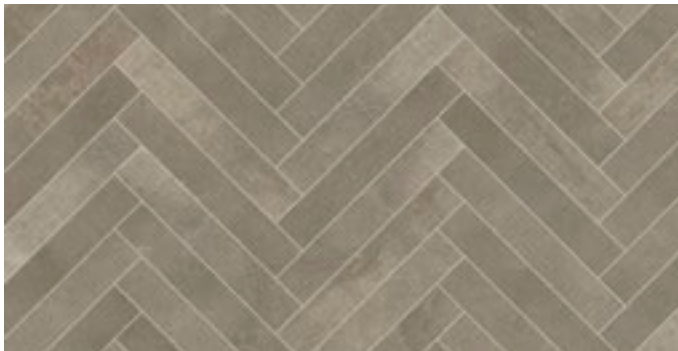


Fumo - Accent Plank  
Gluedown **SM-SP216**




Available in a gluedown installation format.


Gluedown: 24.0" x 24.0" (40ft<sup>2</sup> per box)

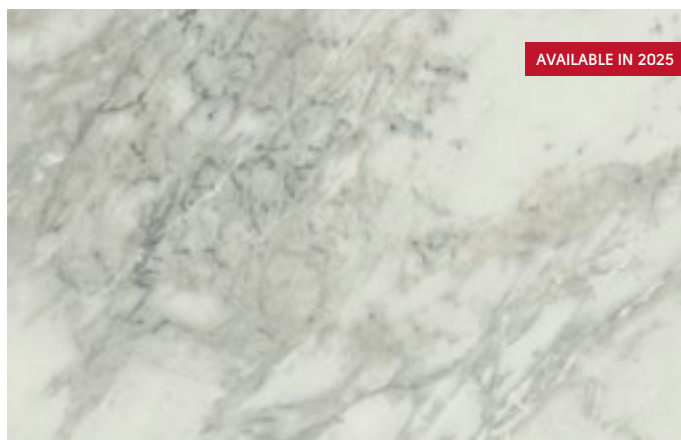

Sillano Marble  
Gluedown **SP816**

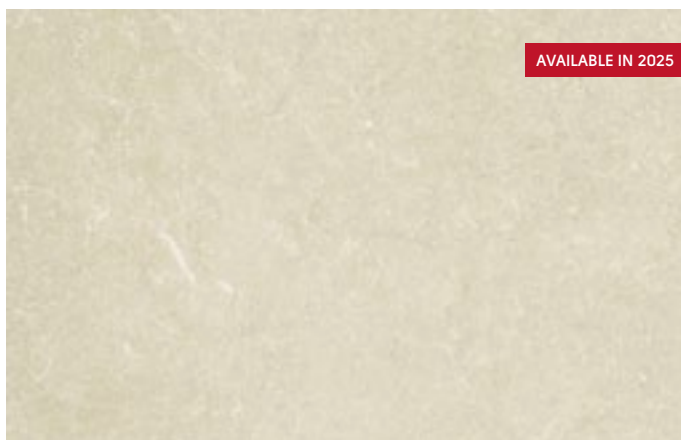


Toledo  
Gluedown **SP811**

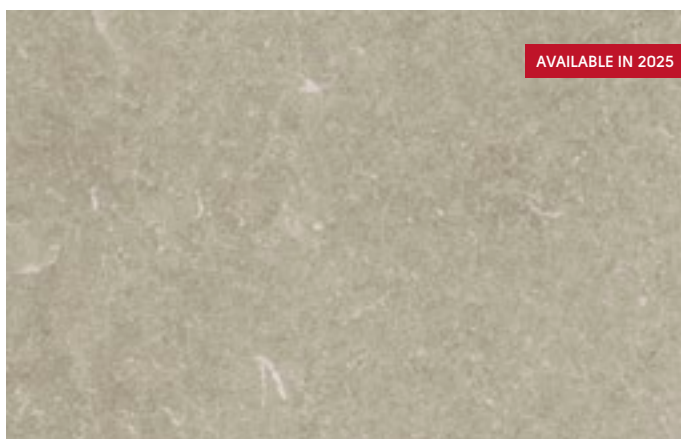

Pamplona  
Gluedown **SP812**

Gluedown: 18.0" x 18.0" (36ft<sup>2</sup> per box)

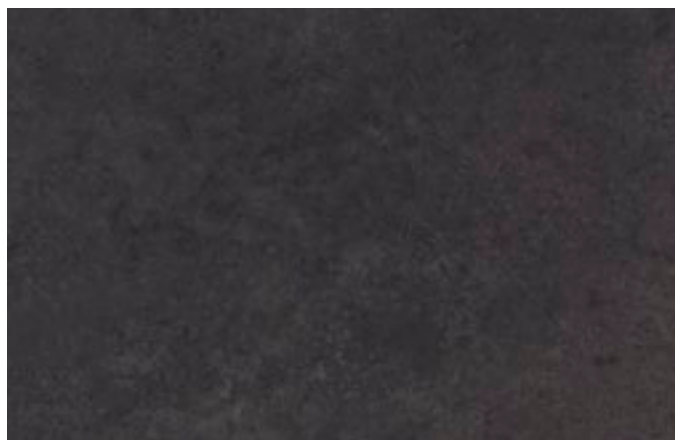

Nero  
Gluedown **SP115**

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)



Clarus  
Gluedown **SP714**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Abstract Designs

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box)



Zinc  
Gluedown **SP722**



Chalk Grey  
Gluedown **SP724**



Yellow Ochre  
Gluedown **SP726**



Amber  
Gluedown **SP721**



Burnt Sienna  
Gluedown **SP719**




Available in a gluedown installation format.

AVAILABLE IN 2025



Olive  
Gluedown **SP740**

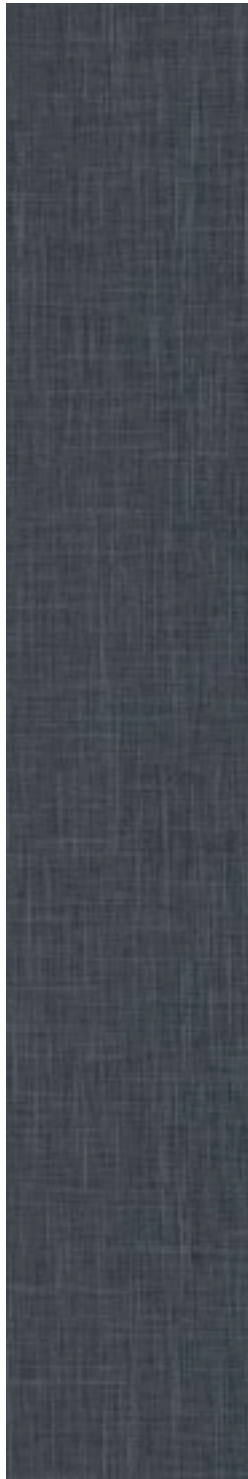

Indigo  
Gluedown **SP720**



Black Iron  
Gluedown **SP727**


**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Opus Abstract Designs

Gluedown: 18.0" x 18.0" (36ft<sup>2</sup> per box)

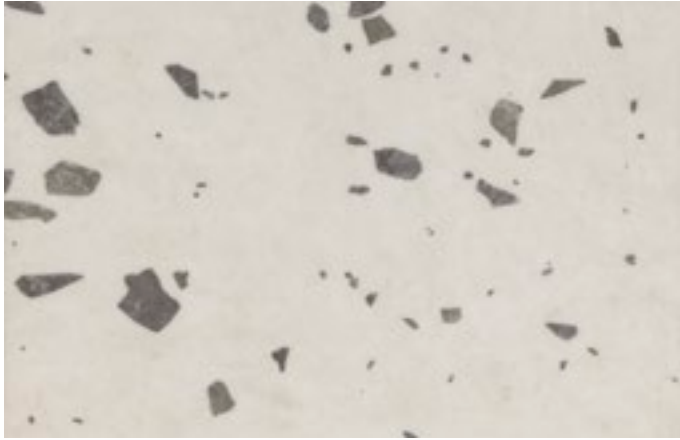

Noale  
Gluedown **SP116**

Gluedown: 18.0" x 24.0" (36ft<sup>2</sup> per box)



Casablanca  
Gluedown **SP219**



Salute Grisio  
Gluedown **SP118**



Marrakesh  
Gluedown **SP220**



Luca  
Gluedown **SP117**



Available in a gluedown installation format.

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)



Leoncini  
Gluedown **SP730**



Stratus  
Gluedown **SP731**



San Marco  
Gluedown **SP729**



Umbra  
Gluedown **SP732**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Abstract Designs

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)




Zinc  
Gluedown **SP723**




Chalk Grey  
Gluedown **SP725**



Albertina  
Gluedown **SP733**

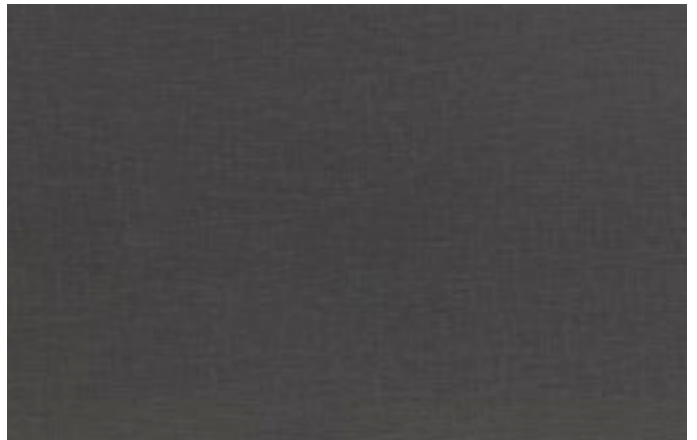

Black Iron  
Gluedown **SP728**

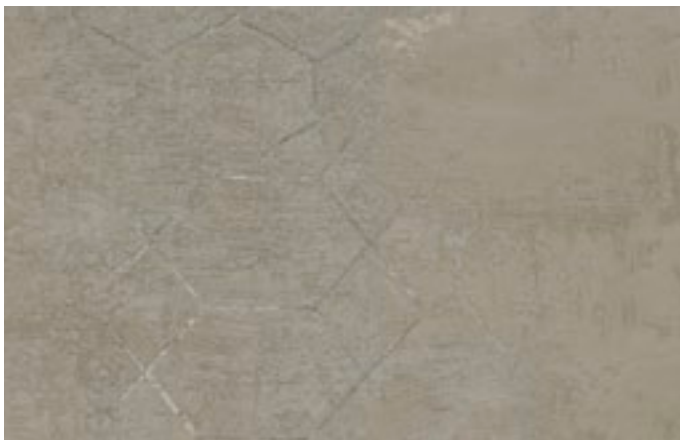

Tizina  
Gluedown **SP735**



Contarini  
Gluedown **SP734**




Available in a gluedown installation format.



# Heritage Collection

Using geometric patterns to create bold, sophisticated looks, the Heritage collection captures the opulence of traditional English architectural styles. For details, contact your Karndean representative.

Gluedown: 12.0" x 12.0" (16ft<sup>2</sup> per box)

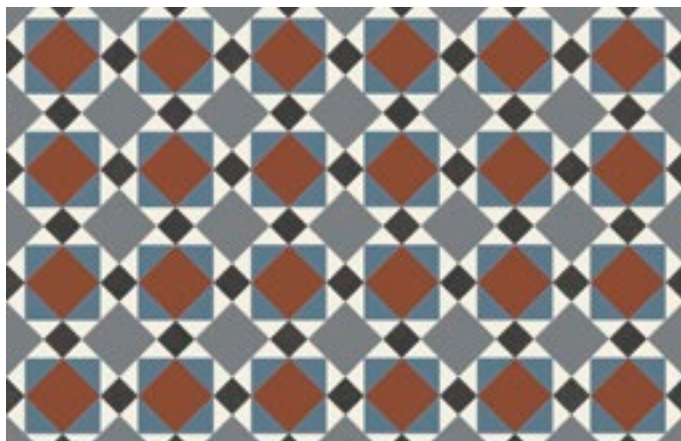

Mayfair  
Gluedown **MAYF-01**



Mayfair  
Gluedown **MAYF-02**

Gluedown: 9.0" x 9.0"\* (18ft<sup>2</sup> per box)




Clifton  
Gluedown **CLIF-01**




Clifton  
Gluedown **CLIF-04**

Gluedown: 12.0" x 12.0"



Gluedown: 9.0" x 9.0" \*



\*Two different square tiles (represented in the line drawings) are used to form the Clifton designs (CLIF-01 and CLIF-04). Orders arrive in the form of the individual square tiles, which are then laid together to form the Clifton designs.

## Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Knight Tile

Oak and pine to marble, slate and terrazzo, the Knight Tile collection offers both wood- and stone-inspired designs and a range of color tones. Each design is available in both gluedown and rigid core for installation.



■ Washed Character Oak **KPI44** | **SCB-KPI44-6**

| Gluedown                    | Knight Tile         | Rigid Core                     |
|-----------------------------|---------------------|--------------------------------|
| 36.0" x 6.0"   48.0" x 9.0" | Plank Size          | 36.0" x 5.91"   48.03" x 8.86" |
| 12.0" x 18.0"               | Tile Size           | 12.0" x 18.0"                  |
| 12mil                       | Wear Layer          | 12mil                          |
| 2mm                         | Thickness           | 4.5mm                          |
| 10 years                    | Commercial Warranty | 10 years                       |
| Begins with KP   CH-KP   ST | Product Code        | Begins with SCB                |

|                                 | Standard   | Gluedown   | Rigid Core  |
|---------------------------------|--|--|---|
| Size                            | ASTM F2421   | See Product Listing  | See Product Listing   |
| Thickness                       | ASTM F386<br>ASTM F387   | 2.0 mm<br>N/A  | N/A<br>4.5 mm   |
| Locking system <sup>1</sup>     |  |  | 2G™ angling installation system   |
| Wear layer                      | ASTM F410  | 12 mil (0.30 mm)   | 12 mil (0.30 mm)  |
| Surface treatment               |  | K-Guard+® PU coating   | K-Guard+® PU coating  |
| Warranty <sup>2</sup>           | Commercial   | 10 Years   | 10 Years  |
| Beveled edge                    |  | No   | No  |
| Classification                  |  | ASTM F1700: Class III Type B   | ASTM F3261: Resilient flooring with Rigid Polymeric Core  |
| Reaction to fire                | ASTM E648-06   | Class 1  | Class 1   |
| Smoke density                   | ASTM E662-06   | Pass (< 450)   | Pass (< 450)  |
| Flammability test               | ASTM D2859   | Pass   | Pass  |
| Slip resistance <sup>3</sup>    | ASTM D2047   | Pass (Dry 0.91)  | Pass (Dry 0.64)   |
| Staining resistance             | ASTM F925  | Pass   | Pass  |
| Heat fastness                   | ASTM F1514   | Pass   | Pass  |
| Light fastness                  | ASTM F1515   | Pass   | Pass  |
| Abrasion resistance             | ASTM D3884<br>ASTM D4060   | Pass (16,000 Cycles)<br>N/A  | N/A<br>Pass (14,000 Cycles)   |
| Dimensional stability           | ASTM F2199<br>ISO 23999  | Pass<br>N/A  | N/A<br>Pass   |
| Acoustic impact noise reduction | ASTM E2179-09<br>ASTM E492-09  | ΔIIC = 4 dB<br>IIC = 43 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 70 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  | ΔIIC = 22 dB<br>IIC = 68 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 69 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)  |
| Static load                     | ASTM F970  | Pass (1500 psi at 0.005")  | Pass (700 psi at 0.005")  |
| Indentation - residual          | ASTM F1914   | Pass   | Pass  |
| Thickness swell                 | NALFA 3.2  | N/A  | Pass (Class 4)  |
| Flexibility                     | ASTM F137  | Pass   | N/A   |
| Adhesive                        |  | DrySet<br>K-Spray<br>Karndean Epoxy<br>K99 HM  | None required; please install according to our installation instructions.   |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0<br>Environmental Product Declaration<br>NSF / ANSI 332<br>ISO 14001 / ISO 9001<br><br>ASSURE CERTIFIED™ | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>External third-party verified Type III EPD<br><br>Sustainability Assessment for Resilient Floor Coverings; Conformant product<br>Manufactured to quality and environment management systems standards<br><br>N/A | Indoor air quality certified;<br>Compliant low emitting VOC emissions.<br>N/A<br><br>N/A<br>Manufactured to quality and environment management systems standards<br><br>Conformance with Rigid Core Flooring Standard SCS-0011 V1-0 |
| Recycling                       |  | Suitable   | Suitable  |
| Phthalate free                  | CPSC-C1001-09.3  | Yes  | Yes   |

<sup>1</sup> 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> Subject to terms. Please see our website.


<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Knight Tile Wood Designs

Gluedown: 48.0" x 9.0" (36ft² per box) | Rigid Core: 48.03" x 8.86" (29.55ft² per box)



Pale Limed Oak - Chevron Plank  
Gluedown **CH-KP94** | Rigid Core **SCB-CH-KP94**  
Image of full-sized plank on page 75

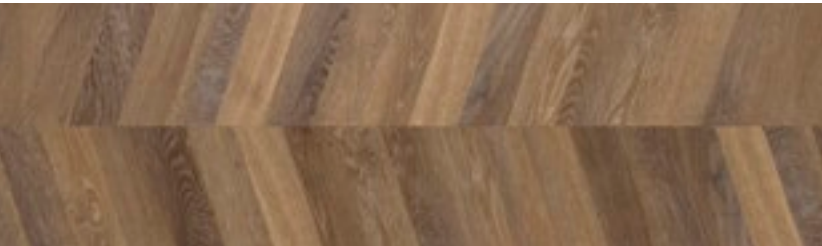

Mid Limed Oak - Chevron Plank  
Gluedown **CH-KP96** | Rigid Core **SCB-CH-KP96**  
Image of full-sized plank on page 73



Mid Limed Oak **CH-KP96** | **SCB-CH-KP96**

Gluedown: 36.0" x 6.0" (36ft² per box)  
Rigid Core: 36.0" x 5.91" (29.53ft² per box)



Meadow Cherry  
Gluedown **KP158**  
Rigid Core **SCB-KP158-6**




Natural Character Oak  
Gluedown **KP145**  
Rigid Core **SCB-KP145-6**



Available in gluedown and rigid core installation formats.



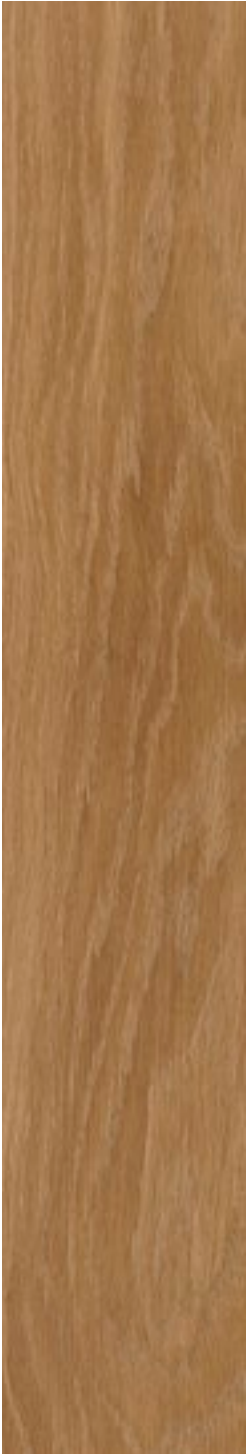

Honey Limed Oak  
Gluedown **KPI55**  
Rigid Core **SCB-KPI55-6**




Classic Limed Oak  
Gluedown **KP97**  
Rigid Core **SCB-KP97-6**



Russet Character Oak  
Gluedown **KPI63**  
Rigid Core **SCB-KPI63-6**



Mid Limed Oak  
Gluedown **KP96**  
Rigid Core **SCB-KP96-6**

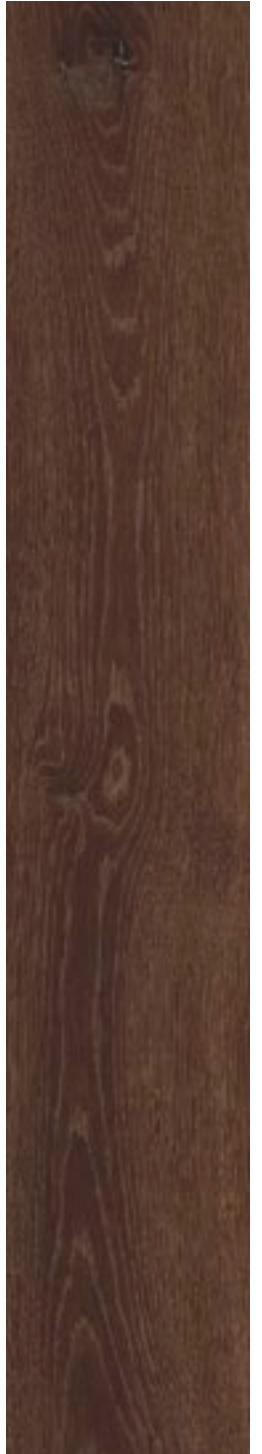

Aged Oak  
Gluedown **KP98**  
Rigid Core **SCB-KP98-6**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Knight Tile **Wood Designs**

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box) | Rigid Core: 36.0" x 5.91" (29.53ft<sup>2</sup> per box)



White Painted Pine  
Gluedown **KP105**  
Rigid Core **SCB-KP105-6**



Natural Scandi Pine  
Gluedown **KP133**  
Rigid Core **SCB-KP133-6**



Dutch Limed Oak  
Gluedown **KP154**  
Rigid Core **SCB-KP154-6**



Norfolk Acacia  
Gluedown **KP159**  
Rigid Core **SCB-KP159-6**



Washed Character Oak  
Gluedown **KP144**  
Rigid Core **SCB-KP144-6**



Available in gluedown and rigid core installation formats.




Pale Limed Oak  
Gluedown **KP94**  
Rigid Core **SCB-KP94-6**



Lime Washed Oak  
Gluedown **KP99**  
Rigid Core **SCB-KP99-6**



Grey Limed Oak  
Gluedown **KP138**  
Rigid Core **SCB-KP138-6**

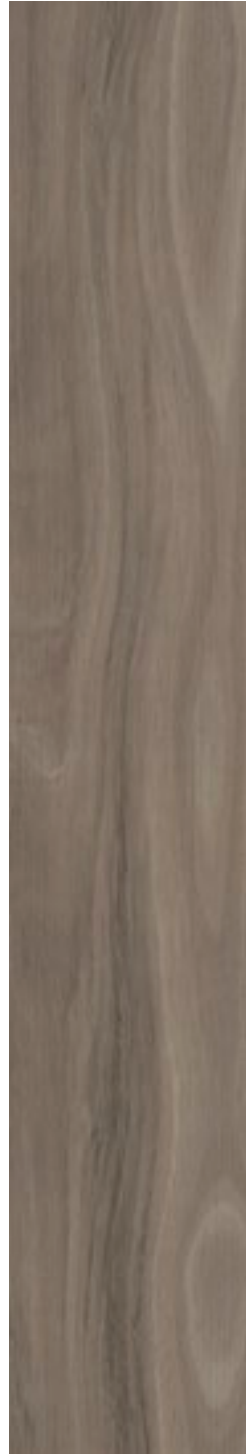

Urban Spotted Gum  
Gluedown **KP141**  
Rigid Core **SCB-KP141-6**



Shadow Studio Oak  
Gluedown **KP150**  
Rigid Core **SCB-KP150-6**

#### Disclaimer: color and pattern reproduction


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Knight Tile **Stone Designs**

Gluedown: 12.0" x 18.0" (36ft<sup>2</sup> per box) | Rigid Core: 12.0" x 18.0" (30ft<sup>2</sup> per box)



Honed Oyster Slate  
Gluedown **ST17**  
Rigid Core **SCB-ST17-G**

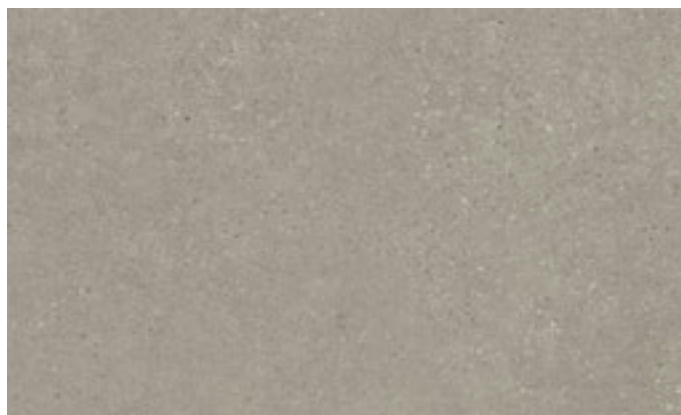

Olten Stone  
Gluedown **ST24**  
Rigid Core **SCB-ST24-G**




Ivory Riven Slate  
Gluedown **ST18**  
Rigid Core **SCB-ST18-G**



Grey Riven Slate  
Gluedown **ST16**  
Rigid Core **SCB-ST16-G**



River Marble  
Gluedown **ST31**  
Rigid Core **SCB-ST31-G**

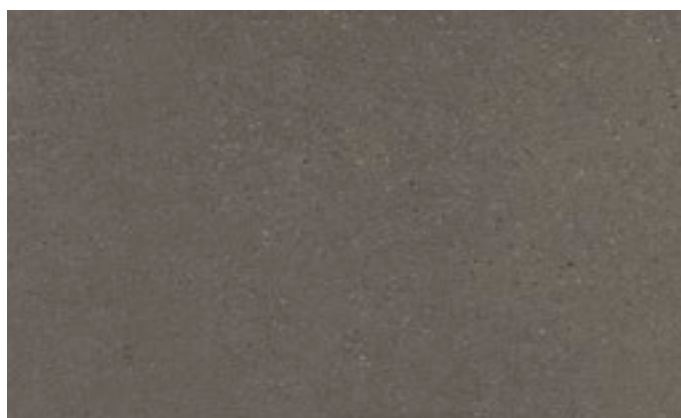


Bern Stone  
Gluedown **ST30**  
Rigid Core **SCB-ST30-G**




Available in gluedown and rigid core installation formats.




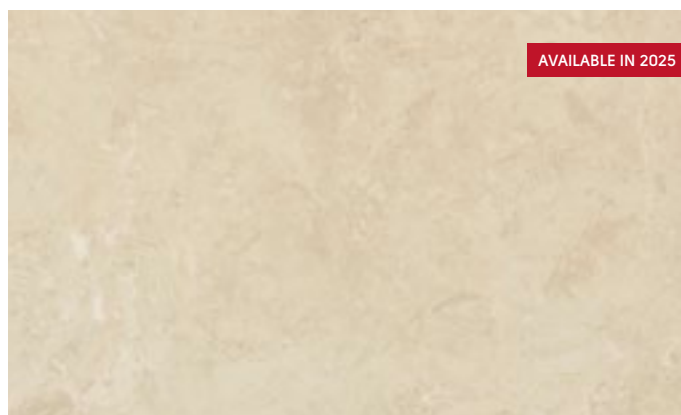

Natural Limestone  
Gluedown **ST33**  
Rigid Core **SCB-ST33-G**

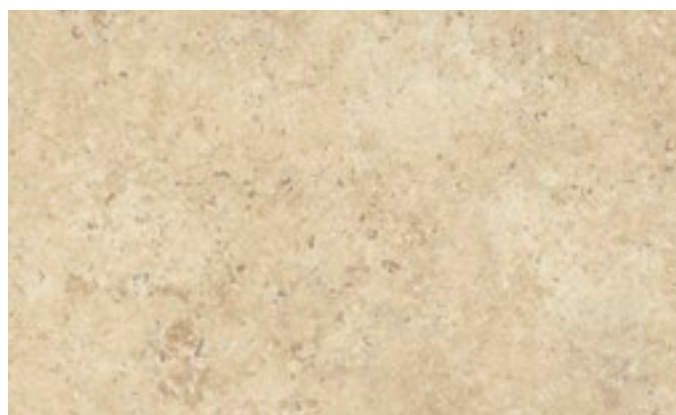


Soapstone  
Gluedown **ST5-18**  
Rigid Core **SCB-ST5-G**

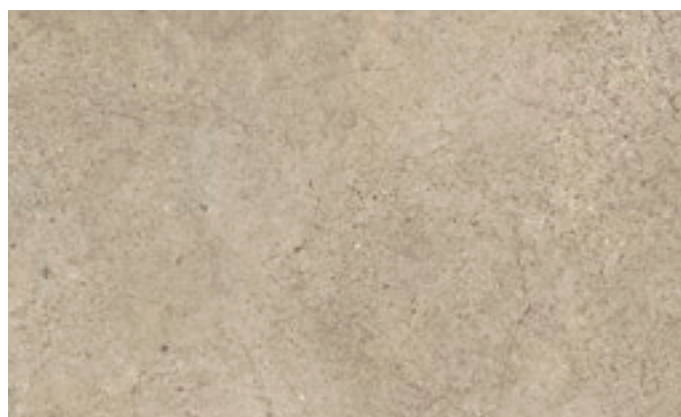

Portland Stone  
Gluedown **ST13**  
Rigid Core **SCB-ST13-G**



Bath Stone  
Gluedown **ST12**  
Rigid Core **SCB-ST12-G**

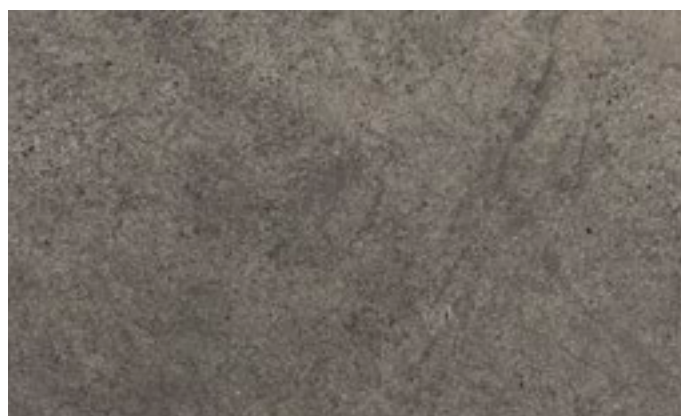

Cumbrian Stone  
Gluedown **ST14**  
Rigid Core **SCB-ST14-G**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Karndean LooseLay

LooseLay combines the best features of two installation formats, gluedown and non-adhesive “floating floors.” It can be cut and laid in custom patterns, like gluedown, while offering faster, easier installation – only minimal adhesive and subfloor prep are needed.\*

It’s all possible because of our K-Wave® friction-grip backing, which keeps pieces firmly in place with the added benefit of reducing noise to lower floors. SureFit™ technology gives the LVT extra dimensional stability, eliminating the need for expansion gaps and transition strips.

At 4.5 mm thick, LooseLay transitions easily to most carpet tile.

\*Note: LooseLay can be fully glued down if preferred.



■ Bridgeport LLP157

| Wood Designs                    | LooseLay Specs      | Stone Designs   |
|---------------------------------|---------------------|-----------------|
| 41.34" x 9.84"   59.06" x 9.84" | Sizes               | 19.69" x 24.02" |
| 33.91   32.29                   | ft² Per Box         | 32.83           |
| 20 mil                          | Wear Layer          | 20 mil          |
| 4.5 mm                          | Thickness           | 4.5 mm          |
| 15 Years                        | Commercial Warranty | 15 Years        |
| Begins with LLP                 | Product Code        | Begins with LLT |

|                                 | Standard                                       | Loose Lay  |
|---------------------------------|--|--|
| Size                            | ASTM F2421                                     | See Product Listing  |
| Thickness                       | ASTM F386                                      | 4.5 mm   |
| Wear layer                      | ASTM F410                                      | 20 mil (0.50 mm)   |
| Surface treatment               |  | K-Guard+® PU coating   |
| Warranty <sup>1</sup>           | Commercial                                     | 15 years   |
| Beveled edge                    |  | No   |
| Classification                  | ASTM F1700                                     | Class III Type B   |
| Reaction to fire                | ASTM E648-06                                   | Class 1  |
| Staining resistance             | ASTM F925                                      | Pass   |
| Smoke density                   | ASTM E662-06                                   | Pass (< 450)   |
| Flammability test               | FF 1-70; Federal Approved                      | Pass   |
| Slip resistance <sup>2</sup>    | ASTM D2047                                     | Dry 0.92   |
| Light fastness                  | ASTM F1515                                     | Pass $\Delta E = 1.7$  |
| Abrasion resistance             | ASTM D3884                                     | 113,000 Cycles   |
| Dimensional stability           | ASTM F2199                                     | Pass   |
| Acoustic impact noise reduction | ASTM E2179-09<br>ASTM E492-09                  | $\Delta IIC = 16$ dB<br>IIC = 56 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice) |
| Static load                     | ASTM F970                                      | 1,000 psi  |
| Flexibility                     | ASTM F137                                      | Pass   |
| Electrostatic propensity        | AATCC 134-1996                                 | Pass   |
| Indentation - residual          | ASTM F1914                                     | Pass   |
| Adhesive                        | Please refer to our installation instructions. |  |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0               | Indoor air quality certified;<br>Compliant low emitting VOC emissions.   |
|                                 | Environmental Product Declaration              | Product-specific Type III EPD (products with external third-party verification)  |
|                                 | NSF / ANSI 332                                 | Sustainability Assessment for Resilient Floor Coverings;<br>Silver certified product   |
|                                 | ISO 14001 / ISO 9001                           | Manufactured to quality and environment management systems standards   |
| Recycling                       |  | Suitable   |
| Phthalate free                  | CPSC-C1001-09.3                                | Yes  |

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Karndean LooseLay **Wood Designs**


Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Pure Danish Oak  
Loose Lay **LLP357**



Field Oak  
Loose Lay **LLP356**

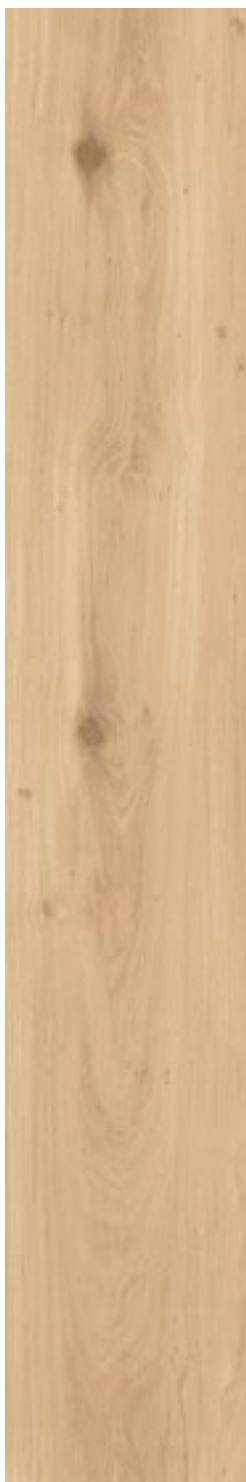

Nude Danish Oak  
Loose Lay **LLP358**



Worn Fabric Oak  
Loose Lay **LLP330**




Champagne Oak  
Loose Lay **LLP310**



Available in a loose lay installation format.




Lemon Spotted Gum  
Loose Lay **LLP317**

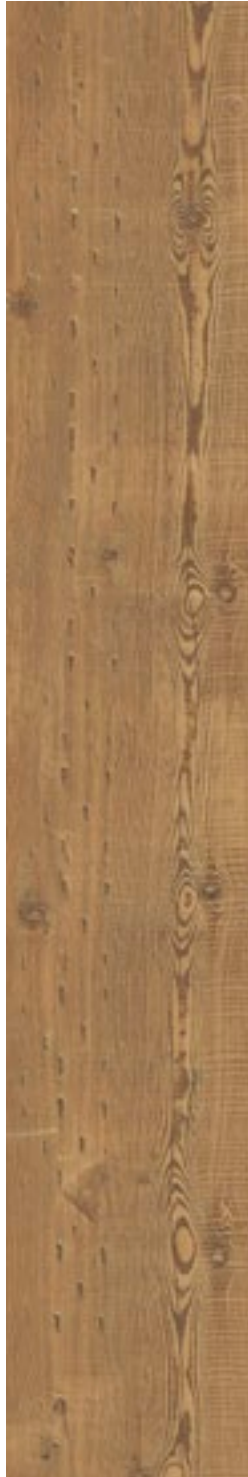

Reclaimed Heart Pine  
Loose Lay **LLP305**



Golden Danish Oak  
Loose Lay **LLP359**

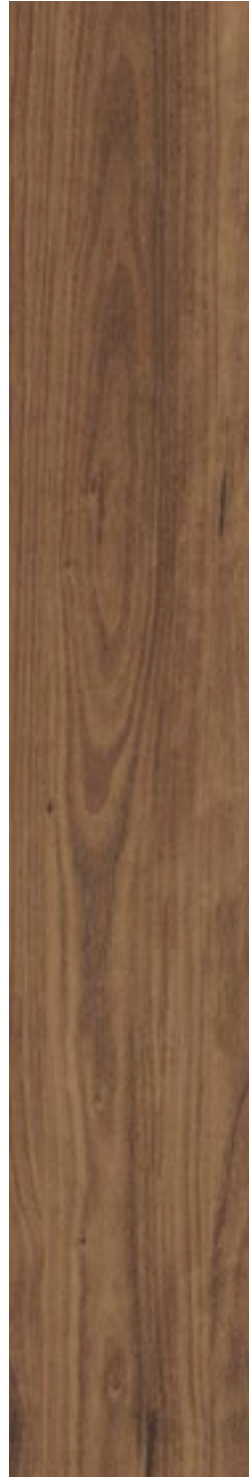

Character Walnut  
Loose Lay **LLP315**



Antique Heart Pine  
Loose Lay **LLP303**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Karndean LooseLay **Wood Designs**

Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Pearl Oak  
Loose Lay **LLP306**



Alpine Oak  
Loose Lay **LLP352**



Cashmere Oak  
Loose Lay **LLP353**



Wheat Oak  
Loose Lay **LLP355**



Neutral Oak  
Loose Lay **LLP307**



Available in a loose lay installation format.



Taupe Oak  
Loose Lay **LLP309**



Shorebird Ash  
Loose Lay **LLP360**



■ Neutral Oak **LLP307**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay **Wood Designs**

Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Weathered Heart Pine  
Loose Lay **LLP304**




Sterling Oak  
Loose Lay **LLP354**



French Grey Oak  
Loose Lay **LLP308**



Swan Bay Ash  
Loose Lay **LLP361**

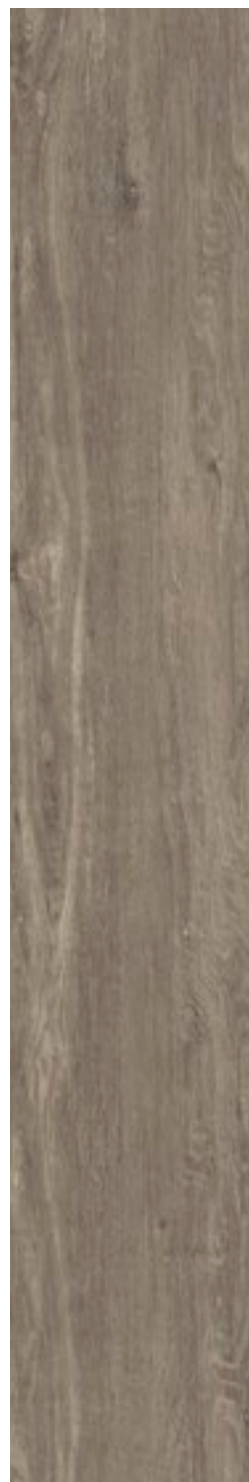

Twilight Oak  
Loose Lay **LLP301**



Available in a loose lay installation format.

LooseLay: 41.34" x 9.84" (33.90ft<sup>2</sup> per box)



Country Oak  
Loose Lay **LLP92**



Ashland  
Loose Lay **LLP95**



Palmaria  
Loose Lay **LLP149**



Bridgeport  
Loose Lay **LLP157**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Karndean LooseLay **Wood Designs**


Loose Lay: 41.34" x 9.84" (33.90ft<sup>2</sup> per box)




Cambridge  
Loose Lay **LLP113**



Newport  
Loose Lay **LLP94**

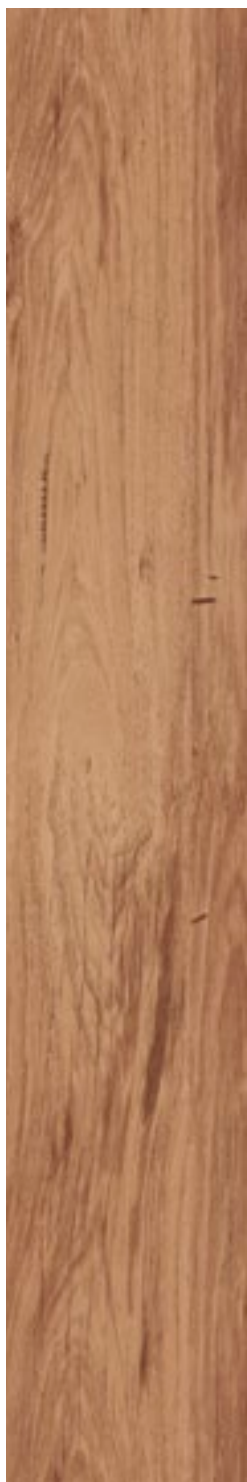

Antique Karri  
Loose Lay **LLP39**

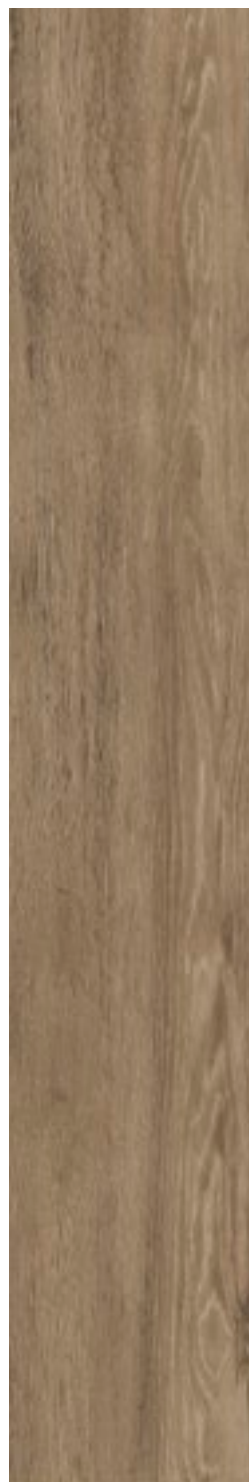

Danbury  
Loose Lay **LLP154**




Stamford  
Loose Lay **LLP109**



Available in a loose lay installation format.



Boston  
Loose Lay **LLP111**

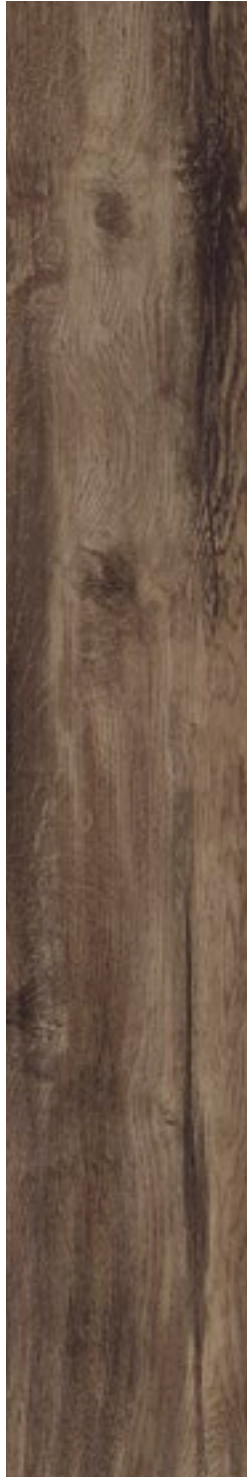

Hartford  
Loose Lay **LLP112**



■ Hartford **LLP112**

**Disclaimer: color and pattern reproduction**


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay Stone Designs

Loose Lay: 19.69" x 24.02" (32.83ft² per box)



Seattle  
Loose Lay **LLT214**

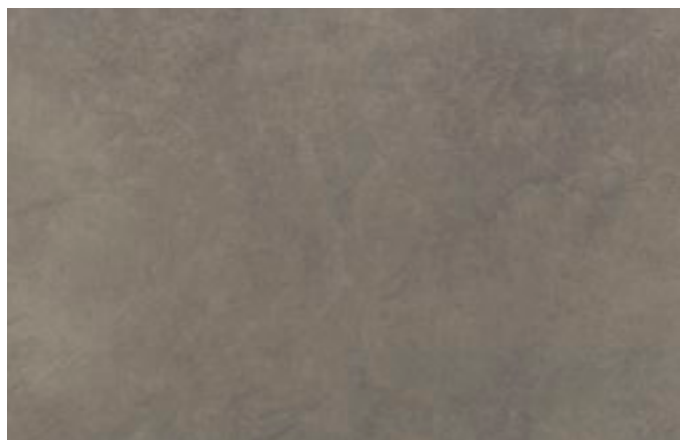


Dakota  
Loose Lay **LLT212**




Colorado  
Loose Lay **LLT201**



Vermont  
Loose Lay **LLT217**

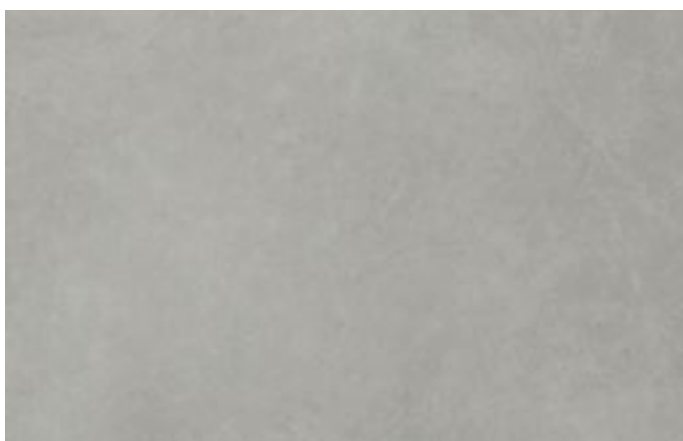

Ontario  
Loose Lay **LLT218**

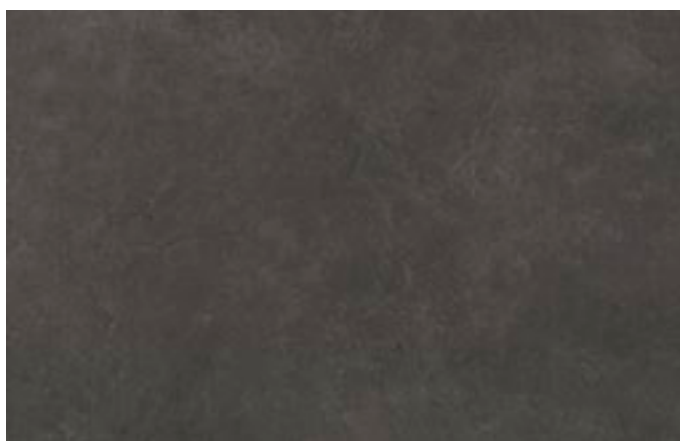

Vulcano  
Loose Lay **LLT211**



Available in a looselay installation format.






Indiana  
Loose Lay **LLT202**



Georgia  
Loose Lay **LLT206**

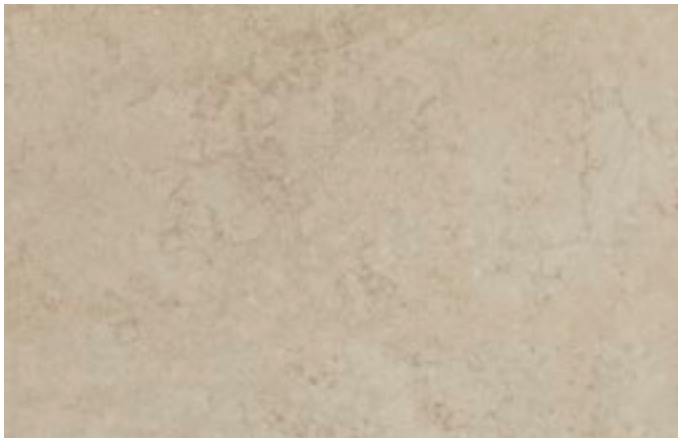

Capri  
Loose Lay **LLT209**



Arizona  
Loose Lay **LLT200**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Korlok Select

Stylish Korlok Select designs are inspired by wood and stone from around the world – a koa tree in Hawaii to marble from an Italian mountain quarry.

Offering fast, easy installation, Korlok Select is a rigid core product that clicks and locks in place, without the need for adhesive, and can be installed over most hard subfloors, facilitating quicker turnaround. In addition, a foam backing creates quieter environments, reducing noise to lower floors by 22 dB.



Ivory Brushed Oak RKP8217




### 5G® Locking Mechanism

Korlok Select can be installed with confidence. Backed by our HoldFast™ 15-year warranty, the 5G® locking mechanism securely locks pieces at the end seams with a single click.

### InteGrout®

Most Korlok Select stone designs include InteGrout®, a nonporous, stain-resistant feature seamlessly integrated with the tiles. InteGrout® provides the realistic look of grout while eliminating the time (and mess) associated with using the real thing during installation.

| Wood Designs                    | Korlok Select       | Stone Designs                                       |
|---------------------------------|---------------------|---|
| 55.91" x 8.86"   23.46" x 5.87" | Sizes               | 17.99" x 36.81"   17.99" x 23.62"<br>5.87" x 23.46" |
| 20 mil                          | Wear Layer          | 20 mil  |
| 4.5 mm                          | Thickness           | 4.5 mm  |
| 15 Years                        | Commercial Warranty | 15 Years  |
| Begins with RKP   SM-RKP        | Product Code        | Begins with RKT   SM-RKT                            |

|                                 | Standard   | Rigid Core   |
|---------------------------------|--|--|
| Size                            | ASTM F2421   | See Product Listing  |
| Thickness                       | ASTM F387  | 6.5 mm   |
| Locking system <sup>1</sup>     |  | 5G® Fold Down installation system <sup>2</sup>    |
| Wear layer                      | ASTM F410  | 20 mil (0.50 mm)   |
| Surface treatment               |  | K-Guard+® PU coating   |
| Warranty <sup>2</sup>           | Commercial   | 15 years   |
| Beveled edge                    |  | Micro  |
| Standards                       | ASTM F3261   | Pass: Resilient flooring with Rigid Polymeric Core   |
| Reaction to fire                | ASTM E648-06   | Class 1  |
| Flammability                    | ASTM D2859   | Pass   |
| Slip resistance <sup>3</sup>    | ASTM D2047   | Pass (Dry > 0.8)   |
| Staining resistance             | ASTM F925  | Pass (No change)   |
| Heat fastness                   | ASTM F1514   | Pass   |
| Light fastness                  | ASTM F1515   | Pass   |
| Electrostatic propensity        | AATCC 134-1996   | 1.6 kV   |
| Abrasion resistance             | ASTM D4060   | Pass (36,000 Cycles)   |
| Dimensional stability           | ASTM F2199   | Pass   |
| Acoustic impact noise reduction | ASTM E2179-09<br>ASTM E492-09  | ΔIIC = 22 dB<br>IIC = 68 dB (6" Concrete Slab w/Drop Ceiling)<br>IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)   |
| Static Load                     | ASTM F970  | Pass (800 psi at 0.005")   |
| Indentation - residual          | ASTM F1914   | Pass (2.3%)  |
| Thickness swell                 | NALFA 3.2  | Pass (Class 4)   |
| Thermal resistance              | ISO 8302   | 0.052 m²K/W<br>Suitable for underfloor heating. Max 81°F   |
| Adhesive                        | None required; please install according to our installation instructions.  |  |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0<br>Environmental Product Declaration<br>NSF / ANSI 332<br>ASSURE CERTIFIED™<br>ISO 14001 / ISO 9001 | Indoor air quality certified; Compliant low emitting VOC emissions.<br>Product-specific Type III EPD (products with external third-party verification)<br>Sustainability Assessment for Resilient Floor Coverings; Silver certified product<br>Conformance with Rigid Core Flooring Standard SCS-0011 VI-0<br>Manufactured to quality and environment management systems standards |
| Recycling                       |  | Suitable   |
| Phthalate free                  | CPSC-C1001-09.3  | Yes  |

1 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 5G® along short edge; 2G™ long edge except SM-RKP8105, SM-RKP8116, SM-RKP8208, SM-RKP8209, SM-RKP8211, SM-RKT3012-G and SM-RKT3013-G which are modified 2G™ on short edge and standard 2G™ on long edge.

3 Subject to terms. Please see our website.

4 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Korlok Select **Wood Designs**


Rigid Core: 23.46" x 5.87" (21.03ft<sup>2</sup> per box)



Texas White Ash - Accent Plank  
Rigid Core **SM-RKP8105**  
Image of full-sized plank on page 96



Canadian Urban Oak - Accent Plank  
Rigid Core **SM-RKP8116**  
Image of full-sized plank on page 94

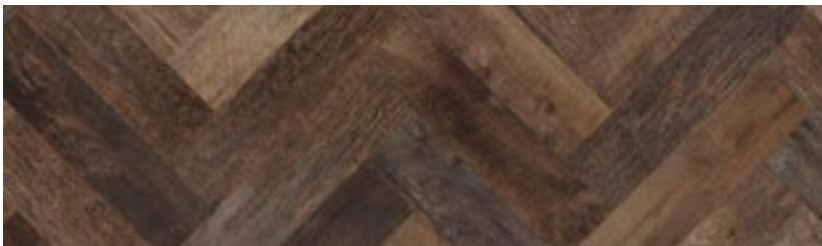

Salvaged Barnwood - Accent Plank  
Rigid Core **SM-RKP8209**  
Image of full-sized plank on page 93




■ Salvaged Barnwood **SM-RKP8209**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Glenmore Oak  
Rigid Core **RKP8237**

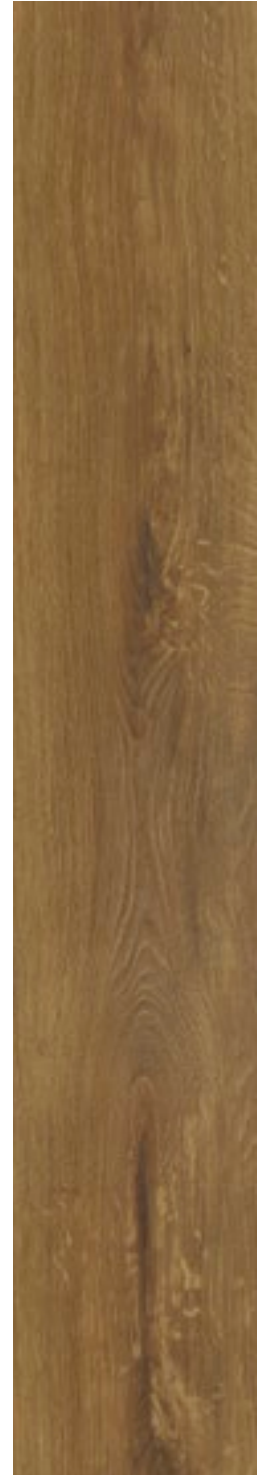

Braemar Oak  
Rigid Core **RKP8238**



Available in a rigid core installation format.




Kilauea Koa  
Rigid Core **RKP8124**




Natural Koa  
Rigid Core **RKP8122**



Salvaged Barnwood  
Rigid Core **RKP8209**

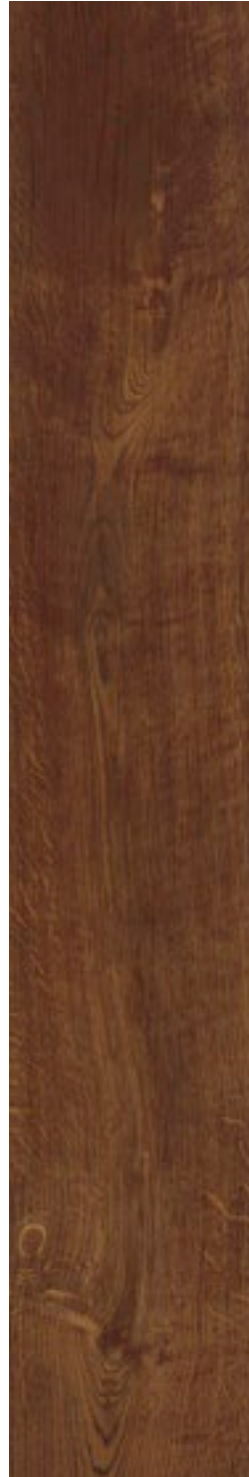

Cathedral Oak  
Rigid Core **RKP8114**

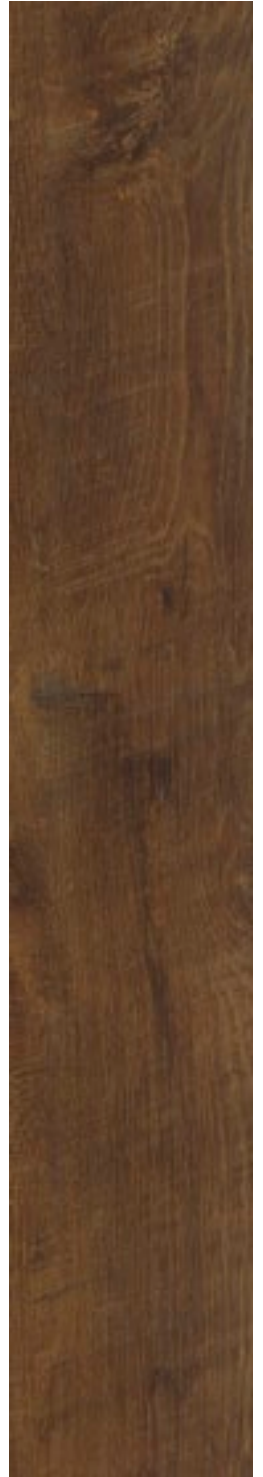

Antique French Oak  
Rigid Core **RKP8110**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.




# Korlok Select **Wood Designs**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Canadian Urban Oak  
Rigid Core **RKP8116**

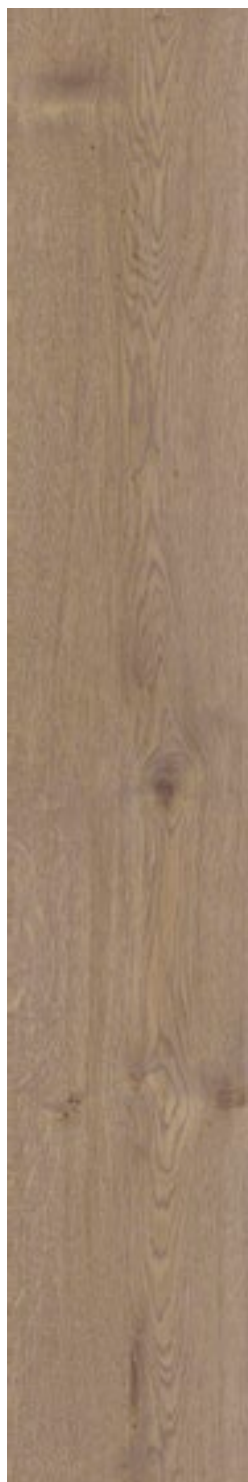

Smoked Butternut  
Rigid Core **RKP8107**



Washed Velvet Ash  
Rigid Core **RKP8102**



Smoked Koa  
Rigid Core **RKP8126**



Reclaimed French Oak  
Rigid Core **RKP8109**



Available in a rigid core installation format.



Warm Ash  
Rigid Core **RKP8103**



Washed Butternut  
Rigid Core **RKP8108**



Barley Oak  
Rigid Core **RKP8206**



Baltic Limed Oak  
Rigid Core **RKP8111**



Warm Brushed Oak  
Rigid Core **RKP8215**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select **Wood Designs**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Ivory Brushed Oak  
Rigid Core **RKP8217**



Canyon Hickory  
Rigid Core **RKP8249**



River Hickory  
Rigid Core **RKP8250**



Texas White Ash  
Rigid Core **RKP8105**



Baltic Coastal Oak  
Rigid Core **RKP8236**



Available in a rigid core installation format.

AVAILABLE IN 2025



Oyster Oak  
Rigid Core **RKP8202**



Baltic Washed Oak  
Rigid Core **RKP8101**



Shadow Oak  
Rigid Core **RKP8203**



Washed Grey Ash  
Rigid Core **RKP8104**



Grey Loire Oak  
Rigid Core **RKP8244**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Korlok Select Stone Designs

Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)



Brunella Marble  
Rigid Core **RKT3013-G**



Palazzo Marble  
Rigid Core **RKT3012-G**

Rigid Core: 5.87" x 23.46" (21.03ft<sup>2</sup> per box)




Brunella Marble - Accent Plank  
Rigid Core **SM-RKT3013-G**




Palazzo Marble - Accent Plank  
Rigid Core **SM-RKT3012-G**

Rigid Core: 17.99" x 36.81" (27.60ft<sup>2</sup> per box)

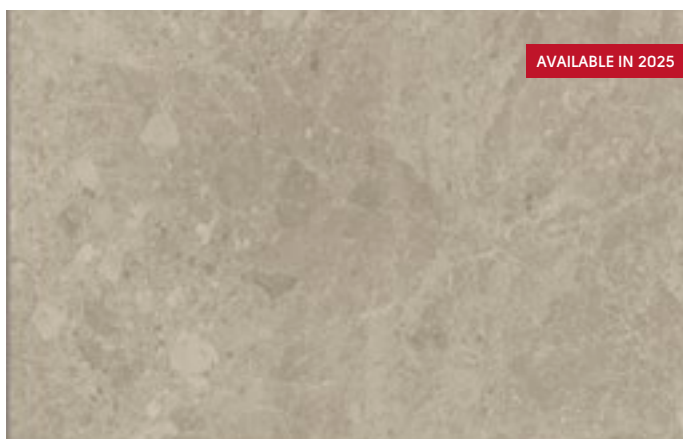

Tortora Breccia Marble  
Rigid Core **RKT3018-G**

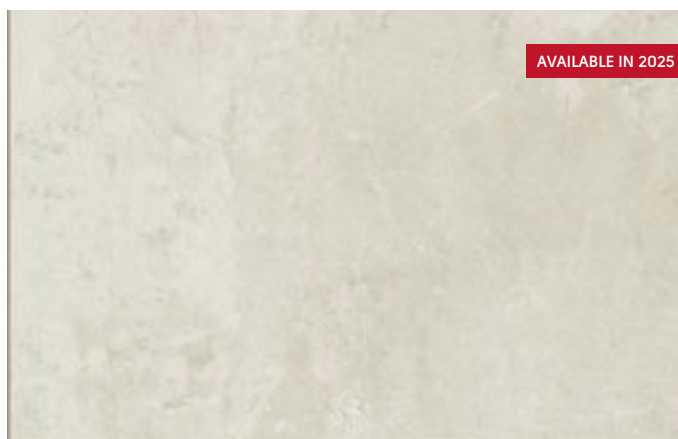


Bianco Breccia Marble  
Rigid Core **RKT3021-G**




Available in a rigid core installation format.

Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)

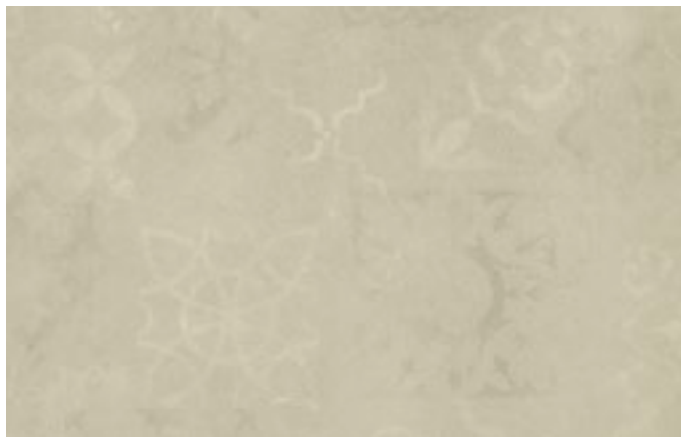


Alpine Lace\*  
Rigid Core **RKT2408**

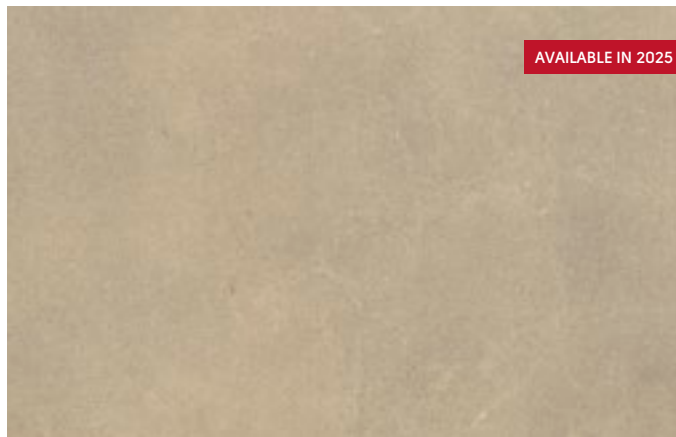


Cotswold Stone  
Rigid Core **RKT2405-G**



Arctic Mist  
Rigid Core **RKT3005-G**

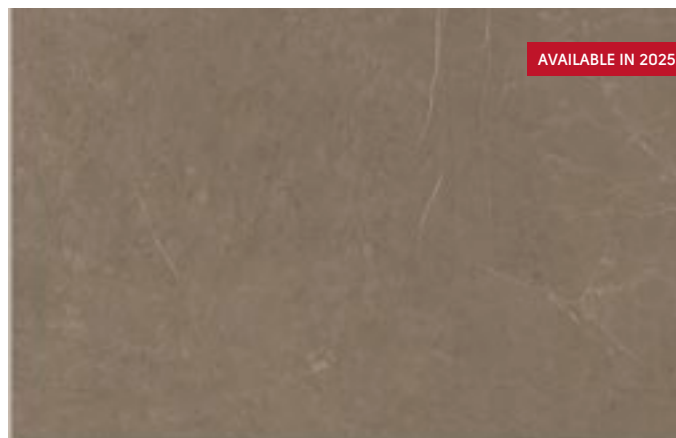

Bronze Castello Marble  
Rigid Core **RKT2416-G**

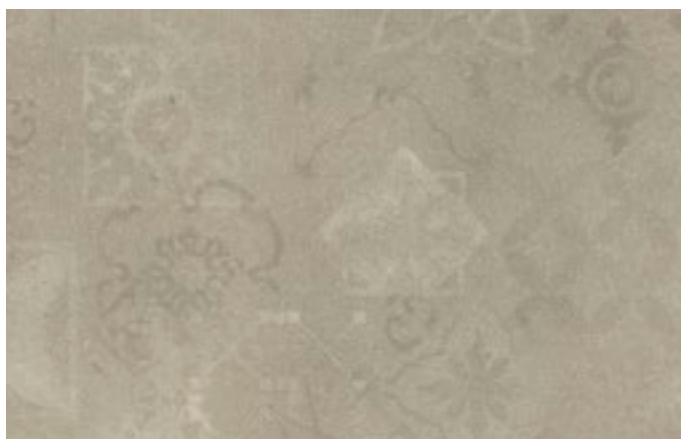

Shadow Lace\*  
Rigid Core **RKT2407**

\*Does not include InteGrout®.

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select **Stone** Designs


Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)




Metro Grey  
Rigid Core **RKT3007-G**




Volcanic Slate  
Rigid Core **RKT3001-G**

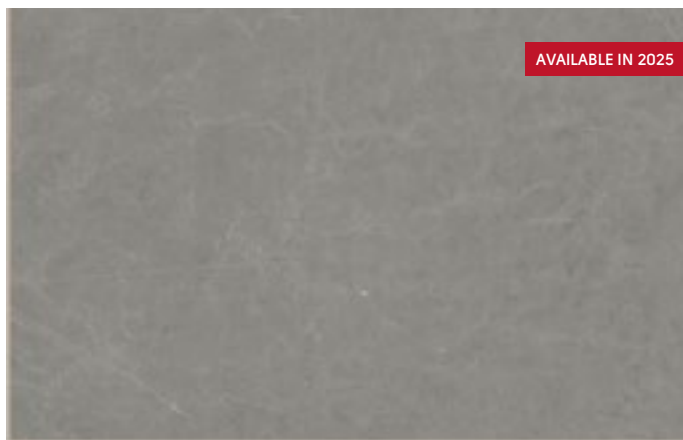

Grey Castello Marble  
Rigid Core **RKT2417-G**

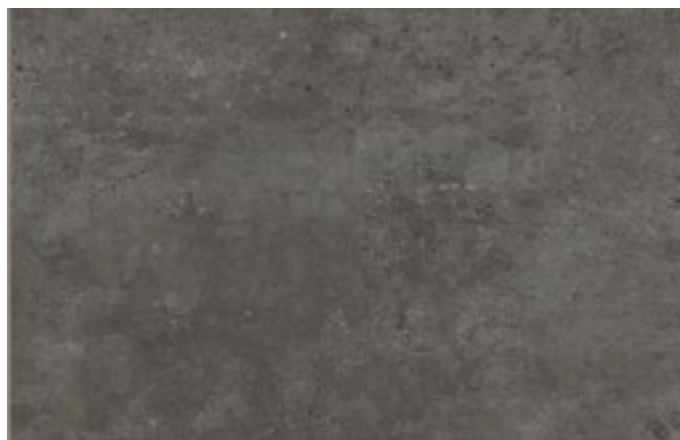

Oxford Grey  
Rigid Core **RKT3008-G**

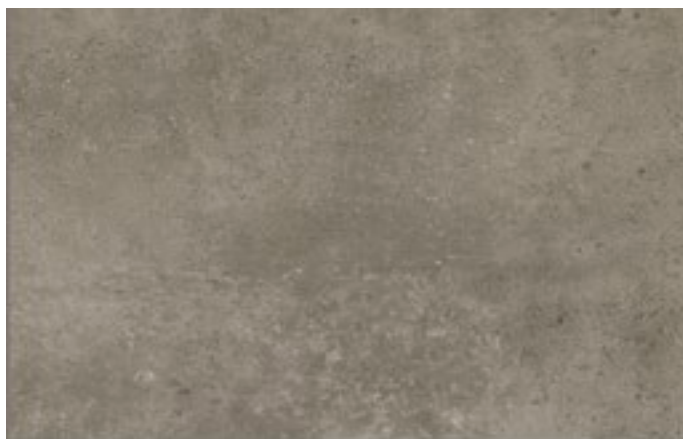

Pebble Grey  
Rigid Core **RKT3009-G**



Black Sands  
Rigid Core **RKT3006-G**



Available in a rigid core installation format.



Aged Parchment  
Rigid Core **RKT3011-G**



Antique Copper  
Rigid Core **RKT3002-G**



Sandstorm  
Rigid Core **RKT3010-G**



Coastal Fog  
Rigid Core **RKT3004-G**



Mountain Slate  
Rigid Core **RKT3003-G**



■ Mountain Slate **RKT3003-G**

#### Disclaimer: color and pattern reproduction


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# Korlok Reserve

Oak, elm, maple and more - the Korlok Reserve collection features designs inspired by a variety of wood species, with the natural character enhanced through techniques such as oiling, liming and fuming.

All Korlok Reserve designs are in a rigid core format for fast, easy installation. Planks click and lock together, without the need for adhesive, and can be installed over most hard subfloors with minimal prep, facilitating quicker turnaround. In addition, a foam backing creates quieter environments, reducing noise to lower floors by 21 dB.

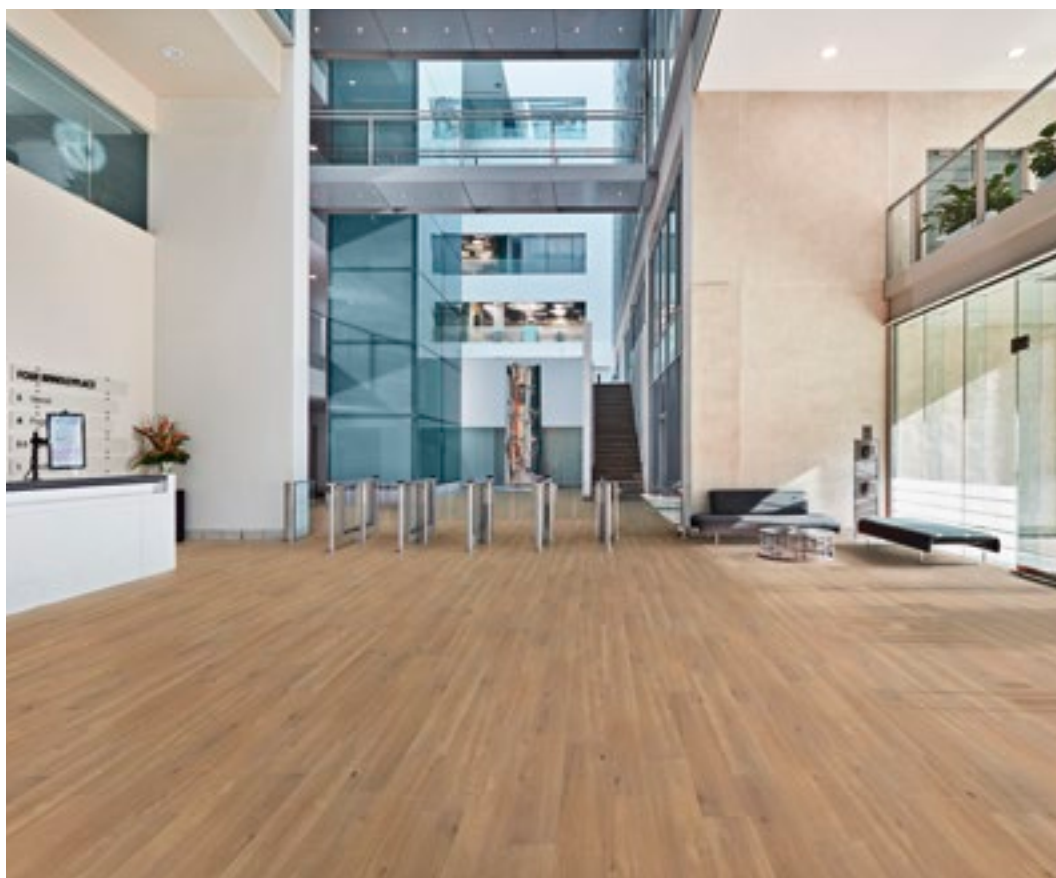

■ North American Oak **RCP6533**

| Korlok Reserve      | Rigid Core      |
|---------------------|-----------------|
| Plank Size          | 48.03" x 7.05"  |
| Wear Layer          | 20mil           |
| Thickness           | 6.5mm           |
| Commercial Warranty | 15 years        |
| Product Code        | Begins with RCP |

|                                 | Standard  | Rigid Core  |
|---------------------------------|---|---|
| Size                            | ASTM F2421  | See Product Listing   |
| Thickness                       | ASTM F387   | 6.5 mm  |
| Locking system <sup>1</sup>     |   | 2G™ angling installation system   |
| Wear layer                      | ASTM F410   | 20 mil (0.50 mm)  |
| Surface treatment               |   | K-Guard+® PU coating  |
| Warranty <sup>2</sup>           | Commercial  | 15 years  |
| Beveled edge                    |   | Micro   |
| Standards                       | ASTM F3261  | Pass: Resilient flooring with Rigid Polymeric Core                                |
| Reaction to fire                | ASTM E648-06  | Class I   |
| Flammability                    | FF 1-70; Federal Approval   | Pass  |
| Slip resistance <sup>4</sup>    | ASTM D2047  | Pass (Dry > 0.8)  |
| Staining resistance             | ASTM F925   | Pass (No change)  |
| Light fastness                  | ASTM F1515  | Pass  |
| Electrostatic propensity        | AATCC 134-1996  | -1.4 kV   |
| Abrasion resistance             | ASTM D4060  | Pass (20,000 Cycles)  |
| Dimensional stability           | ASTM F2199  | Pass  |
| Acoustic impact noise reduction | ASTM E2179-09   | ΔIIC = 21 dB  |
|                                 | ASTM E492-09  | IIC = 69 dB (6" Concrete Slab w/Drop Ceiling)                                     |
|                                 |   | IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)                       |
| Static Load                     | ASTM F970   | Pass (650 psi at 0.005")  |
| Indentation - residual          | ASTM F1914  | Pass  |
| Thickness swell                 | NALFA 3.2   | Pass (Class 4)  |
| Thermal resistance              | ISO 8302  | 0.052 m²K/W   |
|                                 |   | Suitable for underfloor heating. Max 81°F   |
| Adhesive                        | None required; please install according to our installation instructions. |   |
| Environmental                   | FloorScore® SCS-EC10.3-2014 v4.0  | Indoor air quality certified; Compliant low emitting VOC emissions.               |
|                                 | Environmental Product Declaration   | Product-specific Type III EPD (products with external third-party verification)   |
|                                 | NSF / ANSI 332  | Sustainability Assessment for Resilient Floor Coverings; Silver certified product |
|                                 | ASSURE CERTIFIED™   | Conformance with Rigid Core Flooring Standard SCS-0011 VI-0                       |
|                                 | ISO 14001 / ISO 9001  | Manufactured to quality and environment management systems standards              |
| Recycling                       |   | Suitable  |
| Phthalate free                  | CPSC-C1001-09.3   | Yes   |


1 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 Subject to terms.

3 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values

# Korlok Reserve Wood Designs

Rigid Core: 48.03" x 7.05" (23.51ft<sup>2</sup> per box)

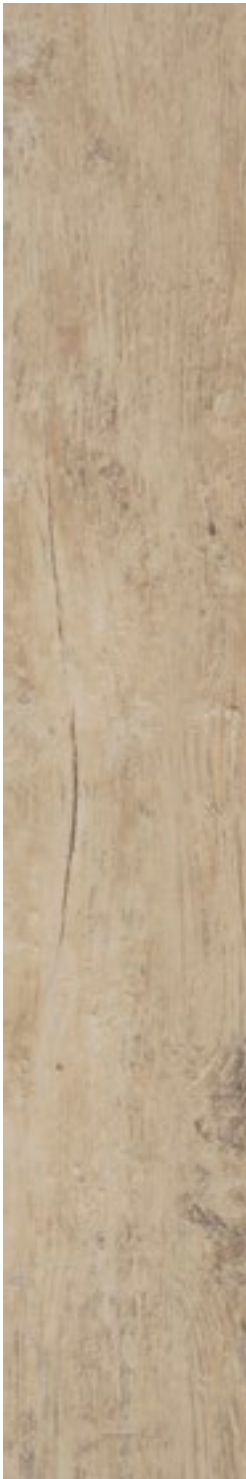


Weathered Oak  
Rigid Core **RCP6532**



Millstone Sycamore  
Rigid Core **RCP6546**



Natural Red Oak  
Rigid Core **RCP6552**

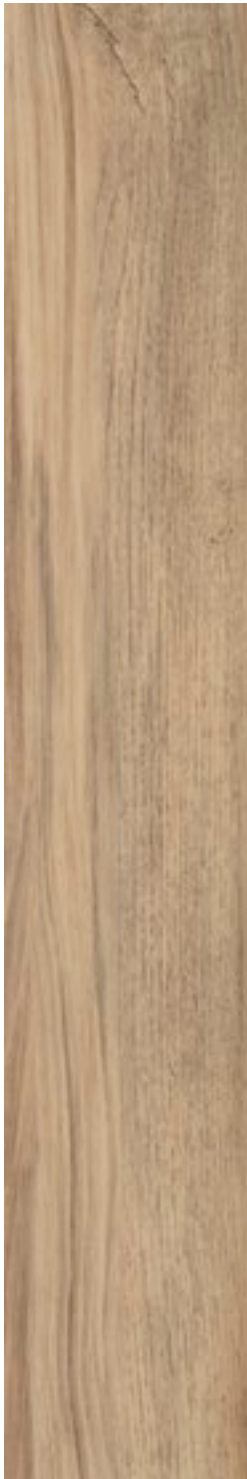

Natural Oiled Oak  
Rigid Core **RCP6536**



North American Oak  
Rigid Core **RCP6533**



Available in a rigid core installation format.



Vintage Oregon Oak  
Rigid Core **RCP6531**



Aged Spanish Oak  
Rigid Core **RCP6535**



■ Aged Spanish Oak **RCP6535**


**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.




# Korlok Reserve **Wood Designs**


Rigid Core: 48.03" x 7.05" (23.51ft<sup>2</sup> per box)

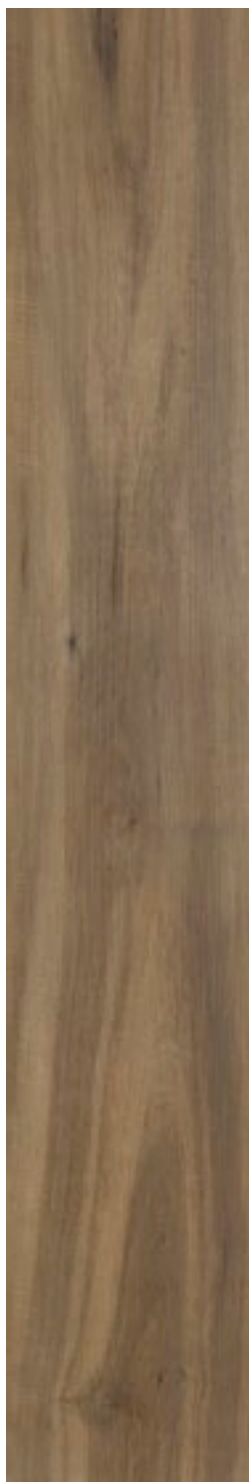


Smoked American Maple  
Rigid Core **RCP6545**

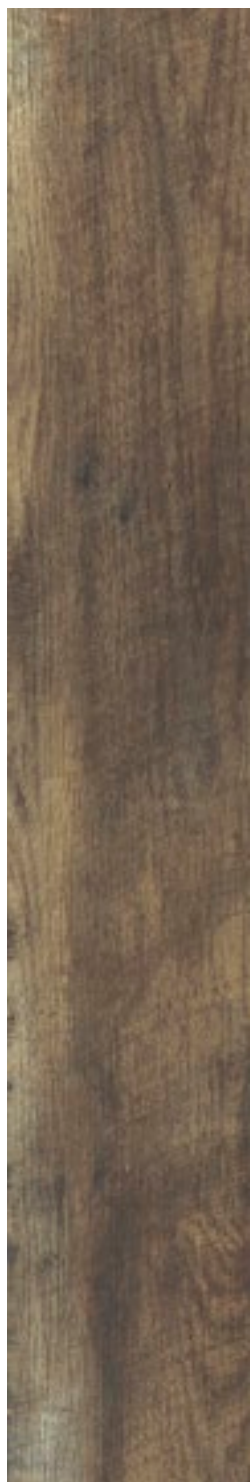

Charred Weathered Pine  
Rigid Core **RCP6539**

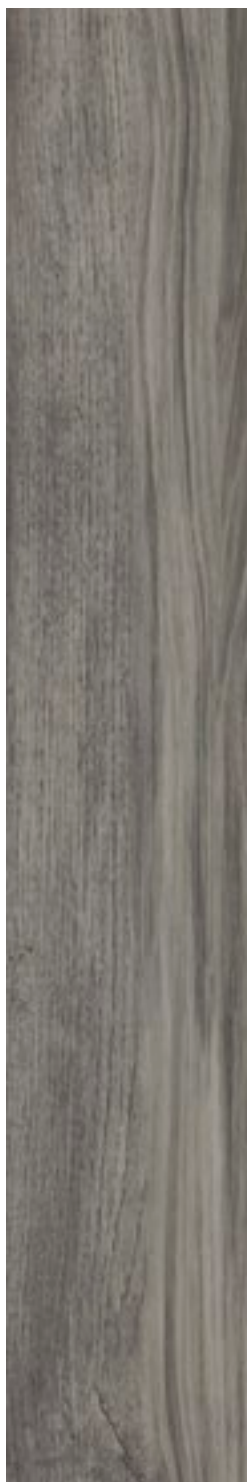

Grey Oiled Oak  
Rigid Core **RCP6541**

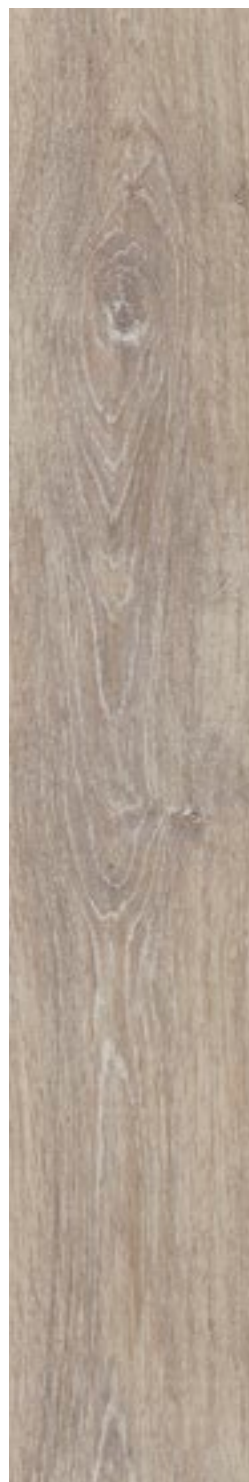

Limed Coastal Oak  
Rigid Core **RCP6534**



Ghost Elm  
Rigid Core **RCP6544**




Available in a rigid core installation format.

AVAILABLE IN 2025



Medina Weathered Oak  
Rigid Core **RCP6553**

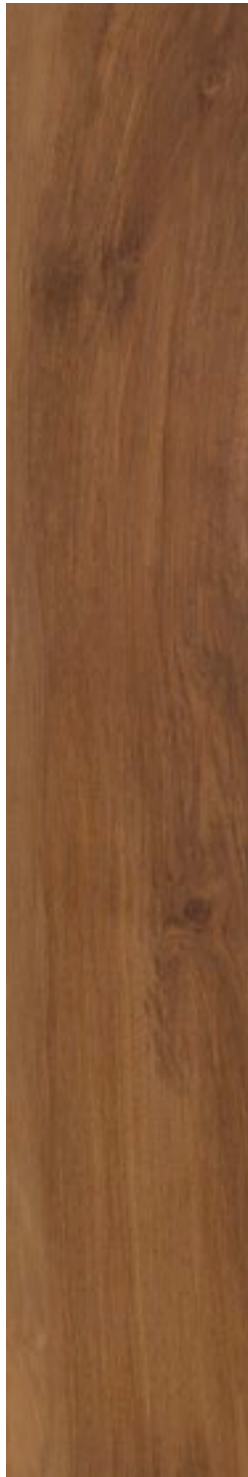

Marron Elm  
Rigid Core **RCP6543**



■ Marron Elm **RCP6543**

#### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.



# design solutions

## Emblems and Logos

Customize your installation with an emblem or logo. For more information, contact your Karndean representative, or call customer service at 888-266-4343.



**Cartwheel with border** 36" x 36"



**Cartwheel** 36" diameter



**Celtic** 36" diameter



**Galaxy** 36" diameter



**Star** 36" diameter



**Nexus** 33" diameter

**Please note:** Orders for custom features must be confirmed with customer signature before processing begins. The appearance of the natural characteristics that inspire our products may be present in custom flooring and cannot be used as the basis for returns.

Create an installation completely unique to the aesthetic and functional needs of your project. With complementary LVT elements such as design strips, grout strips, borders and solid colors, the possibilities are endless.

## Solid Colors

Use solid colors for zoning, wayfinding or simply as a complementary element in the design of your space. Solid colors are only available as gluedown products and may have longer lead times. For more information, contact your Karndean representative, or call customer service at 888-266-4343.





# Design Strips and Grout Strips

Add visual interest to your installation with a slim border or an inlay. Our design strips are narrow pieces of LVT that can be installed between gluedown planks and tiles. Use them as an aesthetic element, or integrate them as part of a zoning or wayfinding concept.

To confirm compatibility of design strips with the gluedown flooring you're considering, contact your Karndean representative, or call customer service at 888-266-4343.

Widths available:



3mm



10mm

**3mm** x 75 linear feet | Pack quantity: 25 strips

**10mm** x 75 linear feet | Pack quantity: 25 strips



**Design Strips** are LVT that can be used with gluedown flooring, available in two widths: 3mm and 10mm.



**DS01** Vanilla



**DS03** Honey



**DS04** Coffee



**DS05** Russet



**DS06** Chocolate



**DS07** Ebony



**DS09** Carbon Cross Grain



**DS10** Chalk



**DS12** Concrete



**DS15** Clay



**DS16** Charcoal



**DS17** Silver



**DS20** Sand



**DS22** Graphite\*

**Grout Strips** are LVT that can be used with gluedown flooring from the Art Select, Opus and Knight Tile collections. Grout Strips are 3mm wide.



**AF06** Beige




**AF05** Ivory



**AF04** Taupe



**AF02** Brown



**AF07** Chestnut



**AF01** Black

\*Graphite DS22 is only compatible with gluedown flooring from our Knight Tile collection.

# Trims


We stock three products made by the company Versatrim: Slim Trim, Slim Cap and VersaEdgeXL.



**Coordinating trims for all collections with rigid core products are stocked and available through the standard order process.** Trims will ship with your product order unless otherwise specified.


## Slim Trim

This 3-in-1 molding functions as a moisture-proof reducer, T-molding and end cap on flooring with a lower profile.

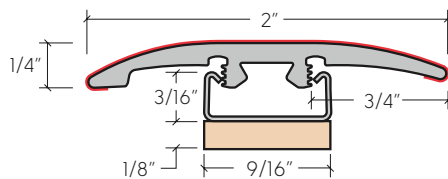


## Slim Cap

Transition from one color of our LVT to another color, or from our LVT to carpet, masonry, sliding doors or other exterior door jambs. Works with floors up to 1/2" (12.7mm).

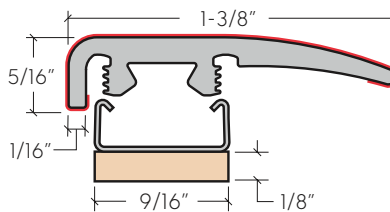

## VersaEdge XL

This 1.5" tall aluminum stair nose can be used on flooring with an overall thickness of up to 0.75" (19mm).

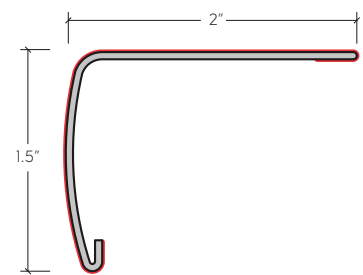

Images are not to scale

All trims are half-size pieces: 46 7/8" long.

For more information about moldings and trims, contact your Karndean representative, or call customer service at 888-266-4343.

To see other Versatrim products, go to [versatrim.com/brands/Karndean](https://versatrim.com/brands/Karndean).

For Versatrim installation information, go to [installationadvice.com](https://installationadvice.com).



**VersaEdge XL**  
Aged Redwood VGW100T | SCB100


# Design Borders

Add a stylish design element, or create a zoned area. With our templates as a starting point, you can use an order form to determine border colors, widths and pricing. For more information, contact your Karndean representative, or call customer service at 888-266-4343.


## Custom Design Border Templates




Block




Davyne 1 color




Davyne 2 color




Diamond



Kousa



Kousa Framed



Leaf




Mackintosh




Mosaic




Quadrant



Regent




Weave



Windsor



Zig Zag

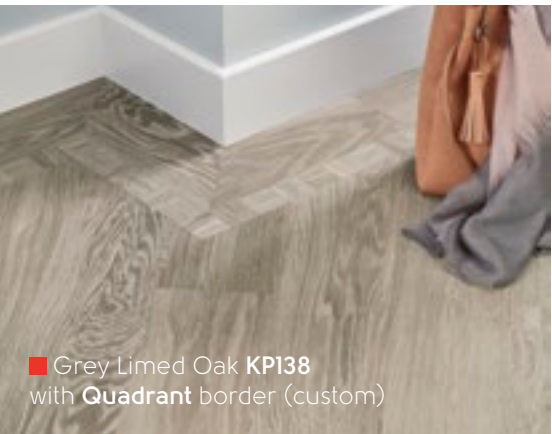

**Please note:** Orders for custom borders must be confirmed with customer signature before processing begins. For more information, contact your Karndean representative, or call customer service at 888-266-4343.

**Please note:** The distinguishing features of the natural materials that inspire our flooring may appear in borders. Returns cannot be accepted on that basis.



# Adhesives and Flooring Products

Formulated and manufactured to ensure optimum performance, we require the use of our adhesives for installation. Refer to product information for installation; installation guides also can be found in the “Resources” section of our website.

To order, call customer service at 888-266-4343.



## Karndean DrySet Adhesive

- Working time – 8 hours
- Easy, time-saving application with 3/8” nap roller
- Open to foot / wheeled traffic immediately after installation
- Available in 1 gallon or 4 gallon pails
- Covers 350 ft<sup>2</sup> to 450 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 95% RH



## Karndean K-Spray

- Working time - 4 hours
- Easy application
- Requires 80% less adhesive than trowel applications
- Open to foot / wheeled traffic immediately after installation
- 22 oz. can | Covers 150 ft<sup>2</sup> to 185 ft<sup>2</sup> per can
- Can be used on substrates with moisture readings up to 98% RH



## K99 Adhesive

- Working time – 2 hours
- Trowel application
- Available in 1 gallon or 4 gallon pails
- Covers 220 ft<sup>2</sup> to 260 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 99% RH



## Epoxy Adhesive

- Trowel application
- Two-part mix
- Extra-strong bond for areas subject to extreme temperatures
- Covers 125 ft<sup>2</sup> to 150 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 90% RH



## QuietChoice Acoustic Underlayment

- Covers 100 ft² per roll
- Use with gluedown products to meet IIC 50 code requirements
- Resists mold and mildew
- High shear strength

### KOVARA® / VAPORSHIELD™ 95

2" Gray Seam Tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft² per roll
- Suppresses moisture up to 95% RH
- Mold- and fungus-resistant
- Must use **KOVARA® / VAPORSHIELD™ 95**

### KOVARA® / VAPORSHIELD™ MBX

4" White Double-Sided  
Tape (2 rolls)

2 1/2" Blue Seam Tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft² per roll
- Suppresses moisture up to 100% RH
- Mold- and fungus-resistant
- Must use **KOVARA® / VAPORSHIELD™ MBX** and **KOVARA® / VAPORSHIELD™ DS**

### Designflooring Tool Kit


- Combi scribe
- Miter box scissors
- Pressure duo roller
- FastTrimmer top and bottom beveler
- Flex steel straightedge
- Dolphin knife



# resources and support

## ONLINE TOOLS AND RESOURCES

Use our website for spec tools, technical resources and more:  
[karndeancommercial.com](http://karndeancommercial.com)

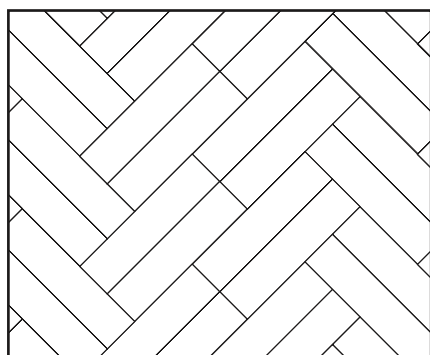

### Design Inspiration

See how custom installations can be created with lay patterns and borders. Our LVT allows you to customize an installation for zoning, wayfinding or added visual appeal.

Go to [karndeancommercial.com/laypatterns](http://karndeancommercial.com/laypatterns)




### BIM Objects Library



Access and download our entire portfolio of wood, stone and abstract designs as BIM components. BIM objects allow you to bring together 3D color models and technical details in one place, providing visibility for both team members and clients, reducing the possibility of miscommunication and costly errors.

Go to [karndeancommercial.com/BIM](http://karndeancommercial.com/BIM)

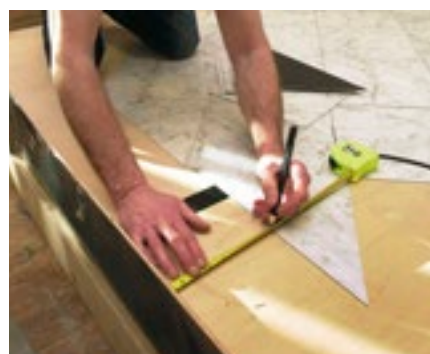

### Technical Resources

This section of our website is where you'll find commonly needed information and resources, from technical data sheets and installation instructions to the ARCAT® SpecWizard tool.

Go to [karndeancommercial.com/resources](http://karndeancommercial.com/resources)

Inspiration through installation, we're proud to provide support from start to finish. Our website, [karndeancommercial.com](http://karndeancommercial.com), features tools to help you choose and spec the right products. And when it's time to order, we carry strong inventory at three U.S. facilities for timely fulfillment from coast to coast.

## Floorstyle Visualizer

See what our flooring designs look like in a variety of virtual commercial settings – or upload photos to see the designs in the actual space for your project. Floorstyle is an easy way to compare designs, experiment with lay patterns, and decide on the perfect look. Floorstyle can be found in the “Inspiration” section on our website.




You can also  
download CAD files  
through Floorstyle.



### Material Bank

It's a source of discovery for over 100,000 architects and designers. Use Material Bank to find our products, order samples, and have them by next day.

[materialbank.com](http://materialbank.com)

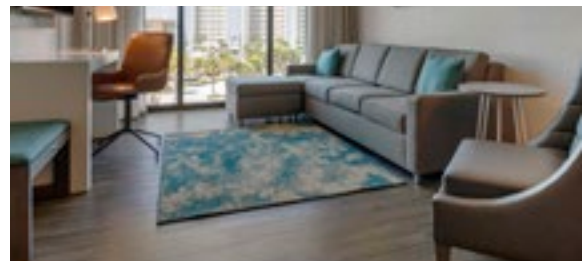

### Case Studies

Learn more about how our LVT has been used in successful projects. Case studies can be found in the “Inspiration” section on our website.



# CUSTOMER SUPPORT

We're available from 8 am to 8 pm (EST) Monday through Friday.  
**Call 888-266-4343, or email [info@karndean.com](mailto:info@karndean.com).**

If you're in the area, all three of our U.S. facilities have showrooms where you can get a firsthand look at our products and free full-sized samples.

## **Pittsburgh Showroom**

1100 Pontiac Court  
Bushy Run Corporate Park  
Export, PA 15632

## **Fort Worth Showroom**

14201 Sovereign Road  
Suite 141  
Fort Worth, TX 76155

## **Las Vegas Showroom**

4230 North Fifth Street  
Suite 100  
North Las Vegas, NV 89030

---

# A PARTNER YOU CAN COUNT ON

We're stocked up on stylish, durable LVT at our warehouses in Pittsburgh, Fort Worth and Las Vegas for faster fulfillment from coast to coast. If you need a big order filled fast, contact your Karndean sales representative, or give us a call at 888-266-4343.



# FREE SAMPLES

Order free samples on our website – just go to page of the product you like, and click the “Order free sample” box. If you’re interested in full-sized samples or our collection-specific architect folders, get in touch with your Karndean sales representative, or contact our customer service team: 888-266-4343.



Order free sample





**Karndean**  
Designflooring

**Karndean Designflooring**

1100 Pontiac Court

Export, PA 15632

Phone: 888-266-4343

Email: [info@karndean.com](mailto:info@karndean.com)

**[karndean.com](http://karndean.com)**

**[karndeancommercial.com](http://karndeancommercial.com)**





