



Karndean

The background features a series of overlapping, wavy, organic shapes in shades of light beige and cream. Overlaid on these are several sets of parallel, vertical lines that curve at the bottom, resembling stylized architectural elements or sound waves. The lines are in a muted red or terracotta color. There are also circular elements: a green circle in the top left, a wood-grain circle in the bottom left, and a textured brown circle in the center-right.

## **Our cover story**

Our cover was designed with neurodiversity in mind, overlaying organic flows with geometric shapes to highlight the human experience of architectural spaces. The colour and texture selection exhibits the differences in creation and consideration for a hypersensitive and a hyposensitive audience.

## At Karndean, we see flooring differently.

We travel the world in our quest to bring you exceptional floors that inspire and delight. From the ancient forests of Europe, to the remote Australian outback and beyond, we seek out expressive and intriguing forms in the natural world to influence our unique floor designs.

By combining these original features with cutting edge design, we create simply beautiful floors that bring your vision to life. We take our clients on an endless journey of design discovery.


# CONTENTS

Welcome	6
What's new?	8
Design is an endless journey	10
The Karndean difference	12
Karndean Evolve®	14
Education	18
Why Karndean?	20
Bring new life to a space with Knight Tile designs	22
Sector in focus: Built-to-rent	24
Sector in focus: Platform_ in Sheffield	28
Trend in focus: Restorative interiors	30
Sectors	32
<b>Form and function</b>	<b>36</b>
Formats	38
Our collections	40
Bespoke	42
Commercial design techniques	44
<b>Products</b>	<b>50</b>
Wood at a glance	52
Stone at a glance	58
Abstract at a glance	62
Heritage Collection	64
Kaleidoscope	68
Art Select	74
Van Gogh	84
Opus	96
Knight Tile	108
Karndean LooseLay	120
Korlok Regent	128
<b>Resources</b>	<b>134</b>
Digital tool suite	136
Showrooms	138
<b>Product overview</b>	<b>140</b>
Abstract products by range	142
Wood products by range gluedown	144
Wood products by range loose lay	149
Wood products by range rigid core	150
Stone products by range gluedown	152
Stone products by range loose lay	156
Stone products by range rigid core	156

# HYPER SENSI TIVITY

For neurodivergent individuals who experience the world intensely, design can offer refuge. Soothing textures, gentle tones, and balanced acoustics support focus and calm, creating environments that care for our senses. These principles benefit anyone seeking a more restful space.

When specifying flooring for hypersensitivity, consider low-contrast patterns, natural textures such as wood grain, matt finishes, and sound-cushioning products.

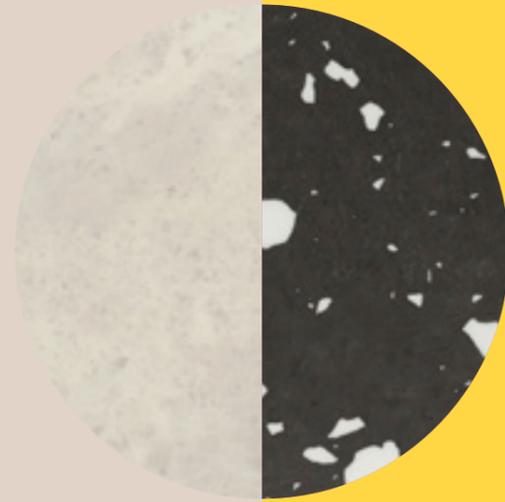

# HYPO SENSI TIVITY

For neurodivergent individuals seeking stimulation, design can energise. Bold patterns, vibrant hues, and tactile surfaces encourage interaction and spark creativity. These techniques can enhance engagement and inspiration for everyone.

When specifying flooring for hyposensitivity, consider abstract flooring tiles, mix-and-match designs, dynamic laying patterns, and bespoke cut features.

# WHAT'S NEW?

## Trend Edit: Restorative Interiors

We're thrilled to unveil 9 new Knight Tile designs, inspired by the Restorative Interiors trend for 2025. With muted, chalky finishes across wood and stone, this collection will bring warmth and calm to your next project.

From scandi-inspired bleached tones to deep browns, and earthy limestones to timeless marble, these designs suit co-living spaces with lasting durability.

Complimenting Pantone's Mocha Mousse, they create inviting, grounding environments.

Explore the Trend Edit today on page 30.

## Our promise to evolve

Sustainable manufacturing. Complete supply chain transparency. Closed-loop product life cycles. And an even stronger commitment to fair and inclusive workplaces.

It's a continuing journey, and there are no shortcuts. But we know now's the time for everyone to begin taking bigger steps. Ours is a promise to think differently, act decisively, and create real change.

You can read more about our sustainability roadmap on page 16.



## Designing for the senses

Neuro-inclusivity in design is about creating environments that cater to a wide range of sensory needs and cognitive processing styles - making everyone feel comfortable and included. Flooring, as one of the largest surfaces in a project, impacts comfort, focus, and inclusion. At Karndean we're committed to providing a portfolio of solutions to support neuro-inclusive spaces. If you'd like to learn more, book onto our RIBA-certified CPD at [CPD@karndean.co.uk](mailto:CPD@karndean.co.uk)



## Proud to partner with Shelter

At the heart of our mission is helping our customers build a home where they can truly thrive – a place of comfort, stability, and peace.

However, the UK is facing a housing crisis, with a severe shortage of affordable and social housing. This leaves thousands of individuals and families without a secure place to call home. We believe that no one should have to face this challenge.

That's why we're proud to announce Shelter as our Charity of the Year for 2025. Together, we can make a difference because, as we all know, home is everything.

Design in the more holistic sense. Encompassing broader contextual factors: nature, innovation and human-centricity, as part of Karndean's quest, a family owned business, to make a positive impact on the world.

Design is an

Reaffirms both our and your path to mastery. Underlines our world travel and constant reinvention. Starting from a family home, on the doorstep of the Cotswolds. Reflecting our long-term commitment since 1973 to the design process.

Providing a sense of possibility. Everything is connected. But also reflects our diverse and ever growing product range, and the continuous endeavours of our product designers. Available in North America, Australasia, Europe and UK, we are mid journey.

endless journey

# THE KARNDEAN DIFFERENCE



## DESIGN

### LVT flooring pioneers

Our global design team travels the world, sourcing the finest natural materials and tracking emerging interior trends to create authentic, cutting-edge flooring. With expert British craftsmanship honed since 1973, we blend print films, embosses, bevels, and plank sizes to craft floors that don't just look beautiful - they evoke a feeling.

Every hue is meticulously examined and harmonized, ensuring timeless, striking designs that elevate any space.



## QUALITY

### Tested beyond limits

Unwavering quality is built into every Karndean floor, rigorously tested to exceed industry standards:

- 25,000+ castor chair cycles – engineered for high-traffic durability
- Chemical resistance testing – repels even the harshest substances
- Flame-retardant with low smoke emission

Certified by BREEAM, FloorScore, SEDEX, and PVC Stewardship, and rigorously tested by SATRA, our floors deliver trusted performance with a commitment to quality, sustainability, and safety.



## SERVICE

### Support every step of the way

Our 103,000 sq. ft BREEAM Excellent-certified warehouse in Worcestershire holds our full product range, ensuring fast, reliable deliveries to keep your projects moving on schedule.

Our Commercial Specification Managers provide:

- Next-day full-size samples
- Sustainability and technical consultations
- Expert guidance from concept to completion

Karndean is more than flooring - it's a partnership from concept to completion.

# KARNDEAN EVOLVE®

OUR PROMISE OF A BETTER TOMORROW.



It's a continuing journey, and there are no shortcuts. But we know now is the time for everyone to begin taking bigger steps. Ours is a promise to think differently, act decisively, and create real change.

**It's a promise to Evolve.**

Five decades ago, our family-owned business was founded on innovation, bold action and a pioneering spirit. Fifty years later, those same ideals guide us forward. Because the future demands change.

**It's time to create a better tomorrow.**



# IT'S A NEW DAY

AND WE'RE COMMITTED TO CREATING A BETTER TOMORROW.

Karndean Evolve® is not only about the planet, but it's about the people too. Six focus areas drive us forward.

# 01

## CONFRONTING CLIMATE CHANGE

We are committed to science-based targets to reduce scope 1 and scope 2 greenhouse gas emissions by 42% by 2030.

All of our manufacturing facilities have installed or are investing in on-site renewable energy, including:

- Solar panels that generate 30% of site energy requirements
- Locally sourced biomass for heating
- A closed-loop water system on the production line



# 02

## HEALTH AND WELLBEING

Sustainability is about more than protecting the planet – it’s about people, too.

We create safe and environmentally friendly products that are free from heavy metals and phthalates, as well as water-based or solvent-free adhesives with low VOC emissions.



# 05

## SUSTAINABLE USE OF RESOURCE

Taking inspiration from the natural world has given us a unique appreciation for the health of the planet – and even more reason to work to protect it.

Creating long-lasting flooring is our speciality, with a lifespan of 35 years for residential use or up to 20 years for commercial use, choosing Karndean reduces the impact of resource and waste needed to replace floors in the future.

**All of our products use as much as 50% recycled PVC in the backing layers.**

# 04

## DIVERSITY & INCLUSION

We’re committed on making our workplace fair, welcoming, and diverse through continuous engagement and education, including:

- Establishing diversity and inclusion groups to actively challenge and engage the rest of the business
- Transparent reporting on the gender pay gap to HMRC

We extend this commitment to our suppliers too, by setting clear expectations where they are championing diversity within their own teams to create a workplace where everyone feels valued.

# 05

## SUPPLY CHAIN TRANSPARENCY

Our manufacturing facilities adhere to ISO 14001 environmental standards, ensuring reduced environmental impact, covering areas such as water usage and eco-friendly packaging.



**As SEDEX participants, we maintain rigorous sustainability criteria, ensuring our suppliers meet the highest standards for labour conditions, health and wellbeing, environmental performance and business ethics.**

# 06

## EDUCATION

Educating our employees about sustainability is an integral part of Karndean Evolve®, from showroom assistants, to the warehouse team, we have all taken part in training to ensure we can all adopt sustainability into our everyday thinking and actions.

We’re also here to share our expertise with flooring specifiers to help them better understand how Karndean is committed to a healthy built environment. Find out about our accredited CPDs on pages 18-19.



Art Select: Castle Hill Ash RL39

# EDUCATION

Continue your professional journey with us

As a leader in flooring design, we are proud to share our knowledge and expertise to help you expand your skills and inspire you to explore the endless possibilities of flooring design.

Whether you are looking to design exceptional interiors that stand out from the crowd, maximise accessibility or enhance indoor environmental quality, our free CPD seminars will guide you through design principles, innovative flooring solutions and the latest legislation.



## SEMINAR ONE:

### **Specifying sustainability: protecting people, planet and prosperity**

In this RIBA and SBID accredited seminar we explore how sustainable design has evolved into a people-centric approach with places, health, and wellbeing at the core of the design process.

Relevant for professionals designing and specifying in both domestic and commercial settings, this one-hour seminar explores the connections between Indoor Environment Quality and occupants' health and wellbeing and how sustainable design can minimise the risk of building related health problems.



## SEMINAR TWO:

### **Inclusive flooring design - where form and function meet legislation**

Inclusive design aims to remove barriers by incorporating choice, flexibility and practicality, making it possible for everyone to access and use a space confidently.

Accredited by RIBA and relevant for professionals designing and specifying in both domestic and commercial settings, this one-hour seminar looks at the principles and regulations surrounding inclusive flooring design and discusses the key design criteria to consider.



## SEMINAR THREE:

### **Designing for neuro-inclusive spaces**

Unlock a fresh perspective with our latest CPD, diving deep into the world of neurodiversity. This RIBA-accredited course offers cutting-edge insights into creating inclusive, adaptable spaces for all. Gain a deeper understanding of neurodiverse needs and create spaces that accommodate different sensory needs and enhance wellbeing for all.

# WHY KARNDEAN?

Five decades ago, our family-owned business was founded on innovation, bold action and a pioneering spirit. Fifty years later, those same ideals guide us forward. Along with exceptional customer service and unmatched quality, discover the benefits of specifying Karndean.



## Durable

The elegance of natural materials with the resilience of luxury vinyl.



## K-Guard+® Protection

Built-in scuff and stain resistance, no additional surface treatments needed.



## Waterproof

No swelling, cracking, or warping - ideal for kitchens and bar areas



## Enhanced safety

High risk of slip? Opus Enhance meets the toughest demands and is tested to the highest standards.



## Warranty

Up to 20 years of commercial durability.



## Hygienic

Traps no dust, dirt, or allergens. Our cleaning products also kill 99.9% of germs.



## Installation flexibility

Choose the same design\* in gluedown or rigid core to fit your space's needs.



## Low maintenance

Easy to clean with no need for sealing, staining, or varnishing.



## Realistic designs

Designed in-house to authentically replicate the look of natural materials.



## Compatible with underfloor heating

Designed for warmth, suitable up to 27°C.



## Acoustic qualities

Quieter than most hard flooring, perfect for apartments and upper floors.

# BRING NEW LIFE TO A SPACE WITH **KNIGHT TILE DESIGNS**

We're thrilled to unveil 9 stunning new designs in our Knight Tile collection, showcasing a beautiful range of wood and stone finishes that are sure to elevate any space. The collection also features a timeless marble design, adding a touch of luxury and sophistication to any interior.



Knight Tile: Wells Acacia **SM-KP160** Cocoa Limed Oak **SM-KP165**



Knight Tile: River Marble **ST31**

As the demand for calming, wellbeing-focused spaces rises, our collection is designed to transform any environment into a peaceful sanctuary, offering a soothing sensory experience.



Knight Tile: Wells Acacia **KP160**

Whether your project is for housebuilding, build-to-rent, student accommodation, or hospitality, our new Knight Tile designs offer the perfect blend of versatility and style, making them ideal for any environment.

Sector in focus:

# BUILD-TO-RENT

## FLEXIBLE LIVING STARTS WITH KARNDEAN

Flexible living redefines how we live together by creating adaptable spaces that respond to our needs. It's not just about shelter but fostering community and shared experiences.

In today's fast-paced world, flexible living solutions like adjustable walls, communal areas, and stylish yet durable finishes such as Karndean flooring help us stay connected and break free from isolation.

Karndean's versatile, high-quality flooring enhances these spaces, offering both beauty and practicality. This approach goes beyond physical spaces; it's about building inclusive communities that promote interaction and well-being. Flexible living paves the way for a new era of living that's centred on connection, adaptability, and quality.

As the demands of modern living evolve, wellness-focused living has become essential. Acoustic performance creates peaceful, quiet environments, while biophilic design brings the calming effects of nature indoors. Access to green spaces promotes mental and physical well-being, fostering a deeper connection to the outdoors.



Karndean LooseLay: Ashland **LLP95**



Van Gogh: Texas White Ash **RKP8105**

Flexible living is about more than just adaptable spaces—it's about building a connected community. The rise of co-living models, shared amenities, and multi-use spaces is transforming how we interact and live together. These thoughtfully designed areas allow residents to easily move between private spaces and communal zones, encouraging collaboration, socialising, and connection. Whether it's a shared kitchen, lounge, or coworking space, flexible living fosters a sense of belonging and creates opportunities for networking and meaningful interactions.



Knight Tile: Wells Acacia **SM-KPI60**

With flexible living, your space is not just a place to live, but a place to thrive together.



Knight Tile: Lime Washed Oak KP99



Knight Tile: Nutmeg Limed Oak KP164

Sector in focus:

# PLATFORM\_ IN SHEFFIELD

Today's discerning renters are looking for more than accommodation. They are also looking to join a vibrant community with convenience and smart connectivity as part of the package. An integrated developer and operator of purpose-built residential communities, PLATFORM\_ has completed a beautiful, high quality complex in the heart of Sheffield, South Yorkshire.



**Sector:** Build to Rent  
**Client and designer:** Platform\_  
**Area:** 10,413m<sup>2</sup>

With 335 units over three buildings, offering a range of accommodation from studios to three bedroom apartments, residents also have access to a gym, lounge and outdoor terraces.

The interior design team at PLATFORM\_ wanted to create a desirable contemporary look that was interesting with a welcoming homely feel. In each apartment block, the bold colours are combined with statement lighting and softly curved furniture. The natural theme is picked up again in the Karndean LooseLay oak design flooring, laid in either straight lay or herringbone patterns, which provides a comfortable yet practical surface.



Karndean LooseLay: Twilight Oak LLP301

Aleks Dineva, design and mobilisation coordinator at Platform\_, said:

"Karndean's wide choice of designs allows us to express our brand direction. We are also keen to work with businesses that have a credible sustainability policy and are making significant progress on their environmental credentials"

"We chose Karndean flooring for the living, dining, kitchen and hall spaces in each apartment for its durability and easy maintenance, something that's especially important as we are a pet friendly operator. One of the reasons we opted for the loose lay format was that, should any damage occur, it's an easy task

to lift and replace just the affected area. The high quality of this flooring gives both residents and us as operators complete peace of mind. What's more, Karndean offers a lifetime residential warranty which is transferable from tenant to tenant."



Karndean LooseLay: Neutral Oak LLP307

Trend in focus:

# RESTORATIVE INTERIORS

Consumers are focused on their health and wellbeing more than ever in light of ongoing global challenges.



Restorative spaces in commercial environments are designed to prioritise well-being, comfort, and rejuvenation for individuals within the space. This trend focuses on creating environments that help reduce stress, enhance mental clarity, and support emotional and physical restoration.

Biophilic design plays a central role, incorporating natural elements like plants, natural lighting, and earthy materials to foster a connection with nature. Calming colour palettes of soft, muted tones help promote relaxation and reduce overstimulation. Comfortable furnishings are essential for encouraging relaxation and providing long-term physical support.

Knight Tile: Russet Character Oak KPI63



These spaces are also flexible, able to adapt for different activities like collaboration, individual work, or moments of rest. The appearance of natural materials like wood and stone contributes to creating a warm and inviting environment.

Knight Tile: Norfolk Acacia KPI59

# SECTORS

Flooring to suit your commercial project



## Healthcare

Healthcare interiors directly impact wellbeing, balancing practicality with thoughtful design. Our Opus Enhance range offers 36+ slip resistance, ensuring safety in demanding spaces. Plus, we provide Light Reflectance Values (LRV) for all products, helping you design with accessibility in mind.

Healthcare | Opus: Fumo SP216 | Burnt Sienna SP719 | Indigo SP720 | Amber SP721

## Retail

Create immersive in-store experiences with flooring that defines zones and guides the customer around the space.

Our collections combine standout aesthetics with durability, ensuring both style and function. Choose rigid core or loose lay formats for quick installation and minimal downtime - keeping retail spaces dynamic and customer-ready.



Retail | Knight Tile: Pale Limed Oak KP94 | Lime Washed Oak KP99 | Washed Scandi Pine KP132 | Grey Limed Oak KP138 | Cumbrian Stone ST14



## Workspace

Offices are evolving into flexible, collaborative spaces that feel like home. Our LooseLay collection offers a 15 year commercial warranty, quick installation, and moved and used again in the future, ensuring longevity and adaptability.

We recommend our 1m<sup>2</sup> tiles for a seamless concrete look without expansion gaps - ideal for large commercial spaces.

# SECTORS

Continued...

## Hospitality & Leisure


Exceptional design isn't just expected in hospitality, it's essential. Guests in 2026 will crave immersive, sensorial spaces that balance indulgence with restoration. That's where Karndean comes in.

Our rigid core flooring delivers seamless style, acoustic comfort (up to 21dB), and rapid installation—all without compromising on aesthetics.

For best-in-class design, explore our Art Select and Korlok Regent collections, where luxury meets innovation, achieving finishes you'd never expect from LVT.



Hospitality | Art Select: Reclaimed Chestnut **RPL-EW21**  
Heritage Collection: Lansdown **LANS-02**

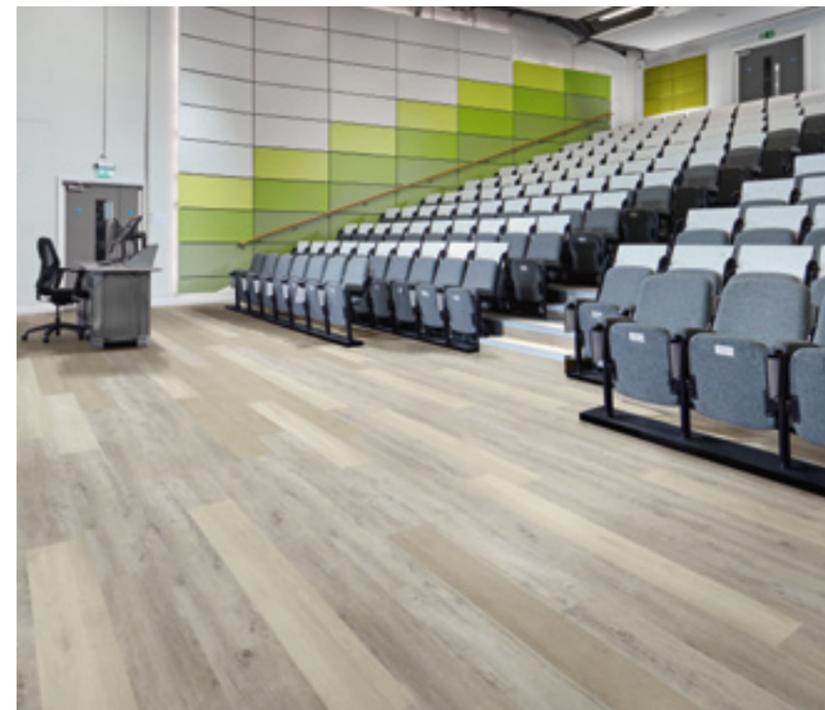

Education | Van Gogh: White Washed Oak **VGW80T** | Greige Oak **VGW110T** | Light Distressed Oak **VGW111T**

## Education

Learning spaces should be both practical and playful. Durable, resilient surfaces combined with expressive shapes and bold colour create environments where students thrive. Our glued-down products offer complete design freedom - whether integrating a school's logo or using zoning and wayfinding to support neuro-inclusive design.



## Co-living

From build-to-rent and student housing to multi-generational living, residential design demands versatility. Our dual format offering lets you choose based on design first - covered with a lifetime warranty in residential settings and long-term performance to attract buyers and renters alike.

Co-living | Van Gogh: Golden Brushed Oak **SM-VGW122T**



We understand that every project is different. And as such, every flooring requirement is unique. To ensure you find exactly what you need, we offer a range of formats, including multifformat products and a bespoke cutting service. From gluedown, to loose lay and rigid core, select from a multitude of sizes and shapes – both form and function assured.


FLOORING & SOLUTIONS

# FORMATS

Three formats to suit your project's needs.

## Gluedown

Our gluedown ranges offer our widest choice of colours and formats. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring.

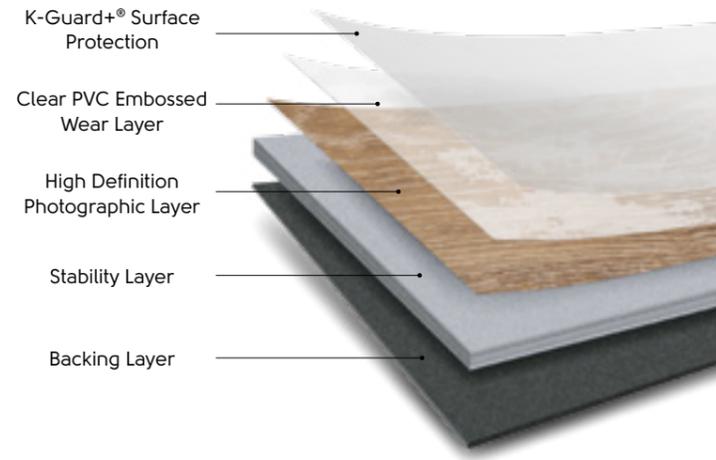

## Gluedown benefits



Range of price points to suit different budgets.



No expansion gap required.



Available in a wide range of designs, colours, textures and sizes.




Design flexibility to achieve bespoke cut designs and laying patterns. Bring your vision to life with our bespoke cutting service.

## Loose lay

Loose lay features our K-Wave® friction grip backing which helps hold the product to the subfloor without adhesive, making it quick and easy to install.

Ideal for underfloor access panels and temporary roomsets, each plank can be lifted individually where required.

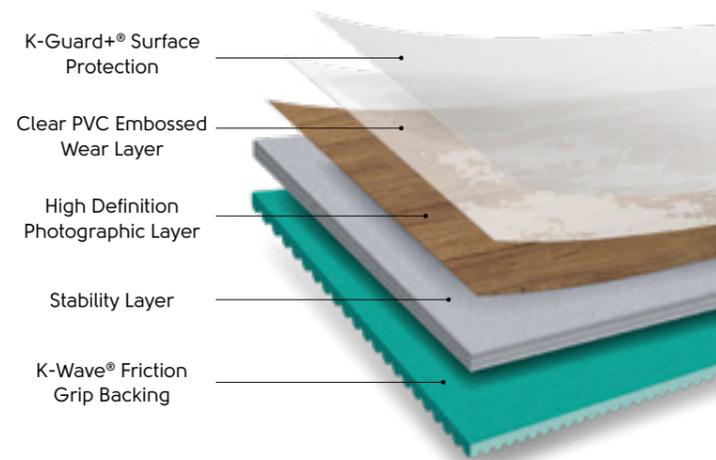

## Loose lay benefits



Quick and easy to install.



Reduces noise transfer by 13dB.



No expansion gap required.



Easy access to underfloor panels.




Suitable for subfloors with elevated moisture found in some new builds and extensions.



Minimises disruption by installing over most hard subfloors.

## Rigid core

Our rigid core ranges are ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. A click-locking mechanism allows for quick installation and the pre-attached backing eliminates the need for a separate underlayment.

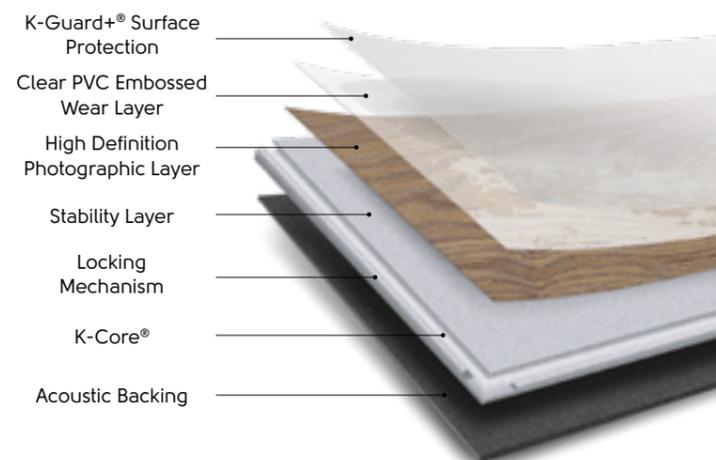

## Rigid core benefits



Quick and easy to install.



Hides subfloor imperfections.



2G™ and 5G® click-locking systems.



Suitable for subfloors with elevated moisture found in some new builds and extensions.



Reduces noise transfer to rooms below by up to 21dB.



Enables preservation of existing floor.

# OUR COLLECTIONS

Range	Bevelled Edge	Plank Size (mm)	Tile Size (mm)	Thickness (mm)	Wear Layer (mm)	ISO 10874 Classification					
						Domestic Use	Domestic Warranty**	Commercial Use	Commercial Warranty^	Light Industrial Use	Light Industrial Warranty**
<b>Gluedown</b>											
<b>Art Select</b>	Standard	1422.4 x 228.6 1219.2 x 177.8 1219.2 x 114.3 914.4 x 152.4 711.2 x 114.3 457.2 x 76.2 228.6 x 76.2 114.3, 152.4, and 228.6 114.3 x 114.3 / 304.8 x 76.2	457.2 x 609.6 457.2 x 914.4 457.2 x 457.2	3	0.7	23	Lifetime**	34	20 years	43	20 years
<b>Van Gogh</b>	Micro	1422.4 x 228.6 1219.2 x 177.8 711.2 x 177.8 457.2 x 114.3	457.2 x 609.6 457.2 x 914.4	3	0.55	23	Lifetime**	33	15 years	42	15 years
<b>Heritage Collection</b>	Standard	Various	Various	2.5	0.55	23	Lifetime**	33	15 years <sup>†</sup>	42	15 years
<b>Opus</b>	Micro	1219.2 x 228.6 914.4 x 152.4 914.4 x 101.6	152.4 x 914.4 457.2 x 914.4 457.2 x 457.2 457.2 x 609.6 76.2 x 457.2	2.5	0.55	23	Lifetime**	33	15 years	42	15 years
<b>Opus ENHANCE</b>	Micro	1219.2 x 228.6 914.4 x 152.4	457.2 x 609.6	2.5	0.55	23	Lifetime**	33	15 years	42	15 years
<b>Knight Tile</b>	No	1219.2 x 228.6 914.4 x 152.4 457.2 x 76.2	304.8 x 457.2	2	0.3	23	Lifetime**	31	10 years <sup>†</sup>	–	–
<b>Kaleidoscope</b>	With over 100 different colours to choose from, the precise technical specification for your Kaleidoscope product will depend on your final selection. Please contact your business manager for further details.										
<b>Rigid core</b>											
<b>Korlok Regent</b>	Micro	1510.0 x 220.0 1074.9 x 214.9 938.5 x 305.1 720.1 x 119.9	N/A	8.0	0.55	23	Lifetime**	33	15 years	–	–
<b>Van Gogh</b>	Micro	1420.0 x 225.0 708.0 x 177.0	457.0 x 600.0	6.5 6.5	0.55	23	Lifetime**	33	15 years	–	–
<b>Knight Tile</b>	No	1220.0 x 225.0 914.4 x 150.0	304.8 x 457.2	4.5	0.3	23	Lifetime**	31	10 years	–	–
<b>Loose lay</b>											
<b>Karndean LooseLay</b>	No	1500.0 x 250.0 1050.0 x 250.0	500.0 x 610.0 1000.0 x 1000.0	4.5	0.55	23	Lifetime**	33	15 years	42	15 years

\* Warranty applies when used at ISO 10874 classification stated.

\*\* Lifetime Warranty defined as 35 years.

± Commercial Light Duty use only.

^ Subject to terms. Please see our website.

† Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

#### Class Examples of areas of use

23 Living rooms, entrance halls, dining rooms, bedrooms and corridors  
 31 Hotel bedrooms, conference rooms, small offices  
 32 Classrooms, small offices, hotels, boutiques  
 33 Corridors, department stores, lobbies, schools, open plan offices

34 multi-purpose halls, counter halls, department stores  
 41 electronic assembly, precision engineering  
 42 storage rooms, electronic assembly  
 43 storage rooms, production halls

# BESPOKE

Our gluedown designs offer endless options in shapes, sizes, colours, and patterns. Create a unique look for your project that brings to life your design concept. Use textures and shapes inspired by the local area to connect emotionally with residents and visitors, preserving the ethos and culture of the location.



Bespoke Kaleidoscope  
Opus: Ignea WP313 | Cera WP314 | Carbo WP318

## Custom design service

For the commercial project that requires an extra level of personalisation, check out our custom design service. Whether you have a company logo that needs replicating, a name to incorporate into the floor or a special design to produce, we can develop 2D and 3D visuals at concept stage to bring your ideas to life.

## Custom cutting service

Elevate your flooring pattern by adding a logo, motif, or any extra design flair that resonates with your project's purpose. Whether it's a bespoke cut that stands out, or a playful tweak to colours in one of our pre-set patterns from our Heritage Collection, the design possibilities are endless. If you're eager to get creative with flooring, don't hesitate to reach out to your local Commercial Specification Manager. They're here to turn your vision into a reality.



Bespoke Heritage Collection  
Clifton: Blush V14 | Nero SP115 | Lace V20



Clerkenwell Showroom: Various Art Select Stones



Bespoke Opus: Luna SP111 | Nero SP115



Crimson V16 | Blush V14 | Gold V15 | Lace V20 | Laurel V13 | Baby Blue V11 | Azure V12 | Terracotta V18 | Opus: Niveus WP411 | Terra SP212 | Primo WP412

# COMMERCIAL DESIGN TECHNIQUES

Flooring doesn't have to just be functional, the design can also work as a navigator, orchestrating the flow and harmony of a space. Discover how designers have cleverly used Karndean to create intuitive and delightful experiences.



Hospitality | Art Select: Dune Oak **RL24** | Brezza Ceppo **LM43**



Leisure | Opus: Indigo **SP720** | Stratus **SP731**

## Wayfinding

The unparalleled flexibility of our flooring allows you to arrange spaces and pathways that will improve traffic flow. In retail, it is beneficial to use paths to guide customers around the space, allowing the brand to tell a story and the customer to experience the space in the way it was intended.



### Blending

Elevate a space by seamlessly merging one area with the next using blended flooring. You can use this technique to update an existing floor without having to replace every plank or tile. To ensure design compatibility, select planks or tiles from the same collection to achieve a look that is both impressive and unique.



Art Select: Pearl Onyx LM35 | Rose Onyx LM36 | Dove Artisan Oak RL30

### Zoning


Our wide range of designs, patterns and textures can be used to zone a space, each with its own personality and purpose. Our Light Reflectance Values allow you to design zones with appropriate contrasts to help those who are visually impaired to distinguish one space from the next.

Meet our products 'at a glance'. Each has its own story to tell, and functional characteristics to suit all project requirements. Be inspired by colour, design and laying pattern. Discover technical specifications from size to thickness, slip resistance to acoustic properties, and sustainability credentials.

# STANDARD


# WOOD AT A GLANCE

■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay | ■ Korlok Regent

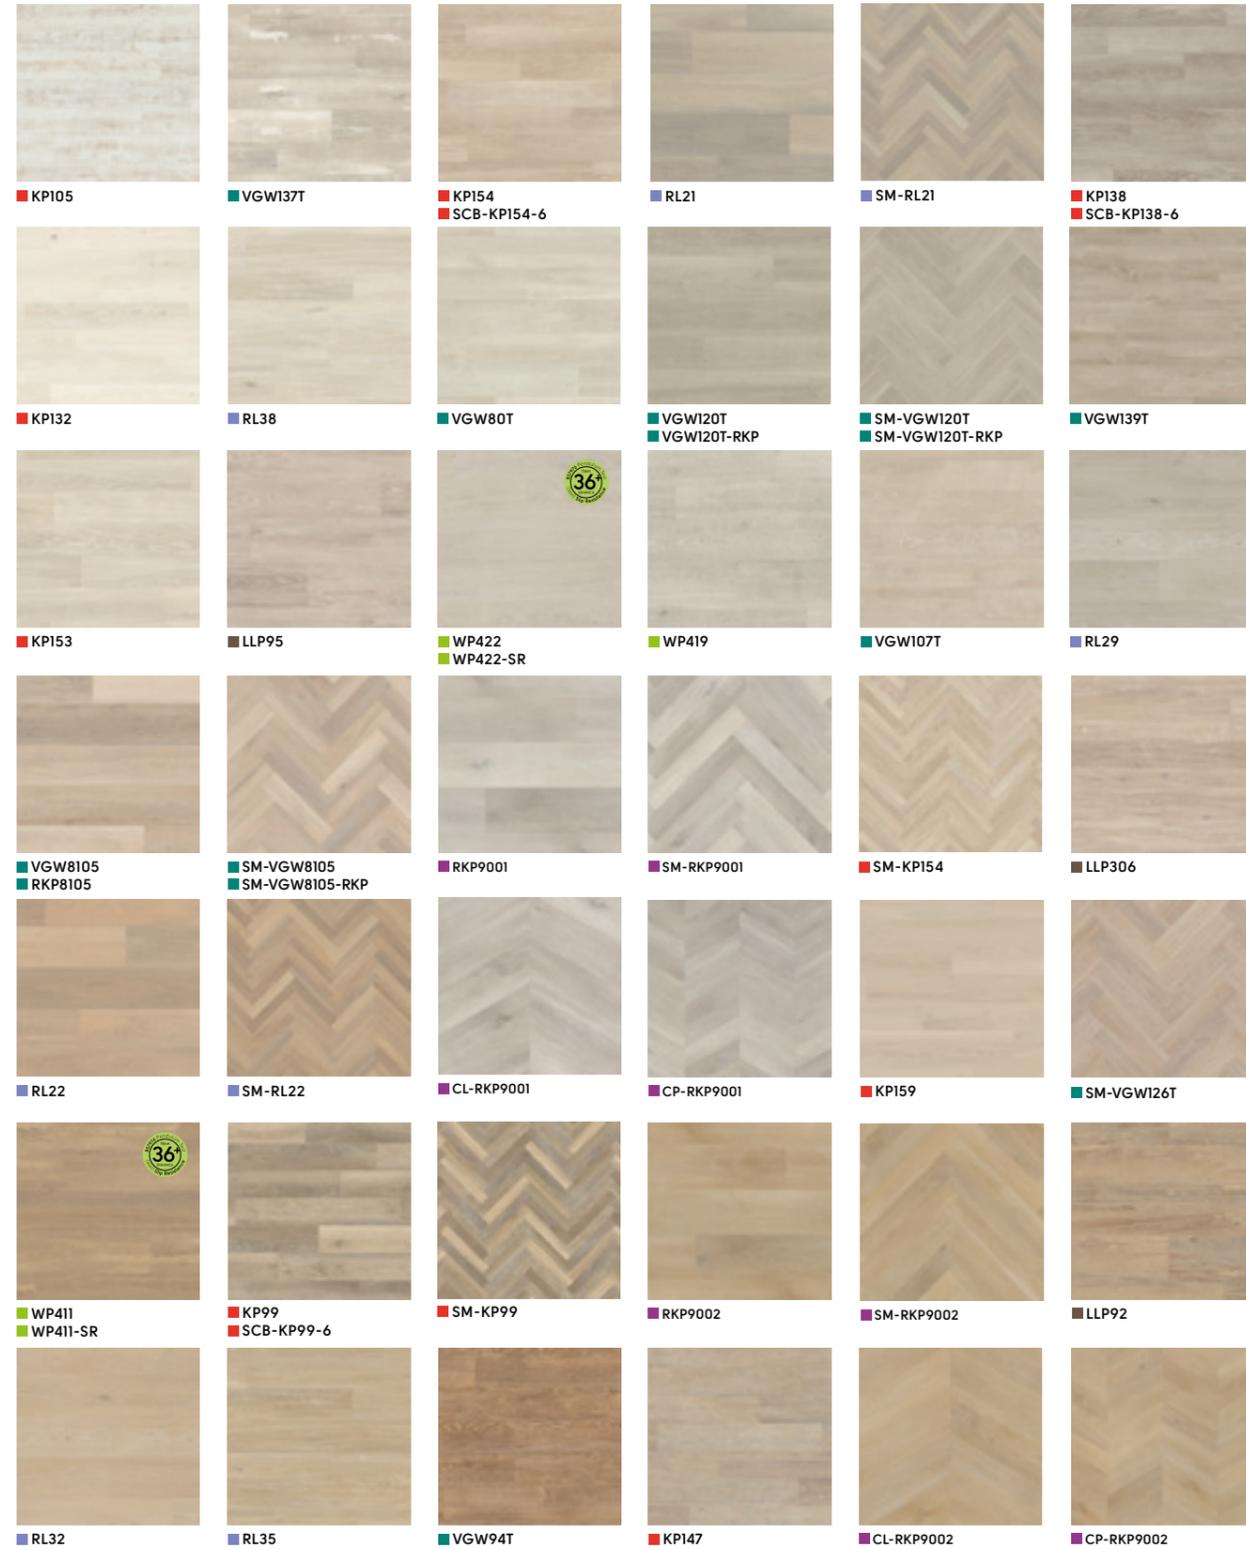



## Opus Enhance

A number of our Opus products are available with an enhanced finish and rougher surface texture, specifically for use in commercial areas. Look out for the 36+ logo on relevant products. See pages 98 and 102 for details.

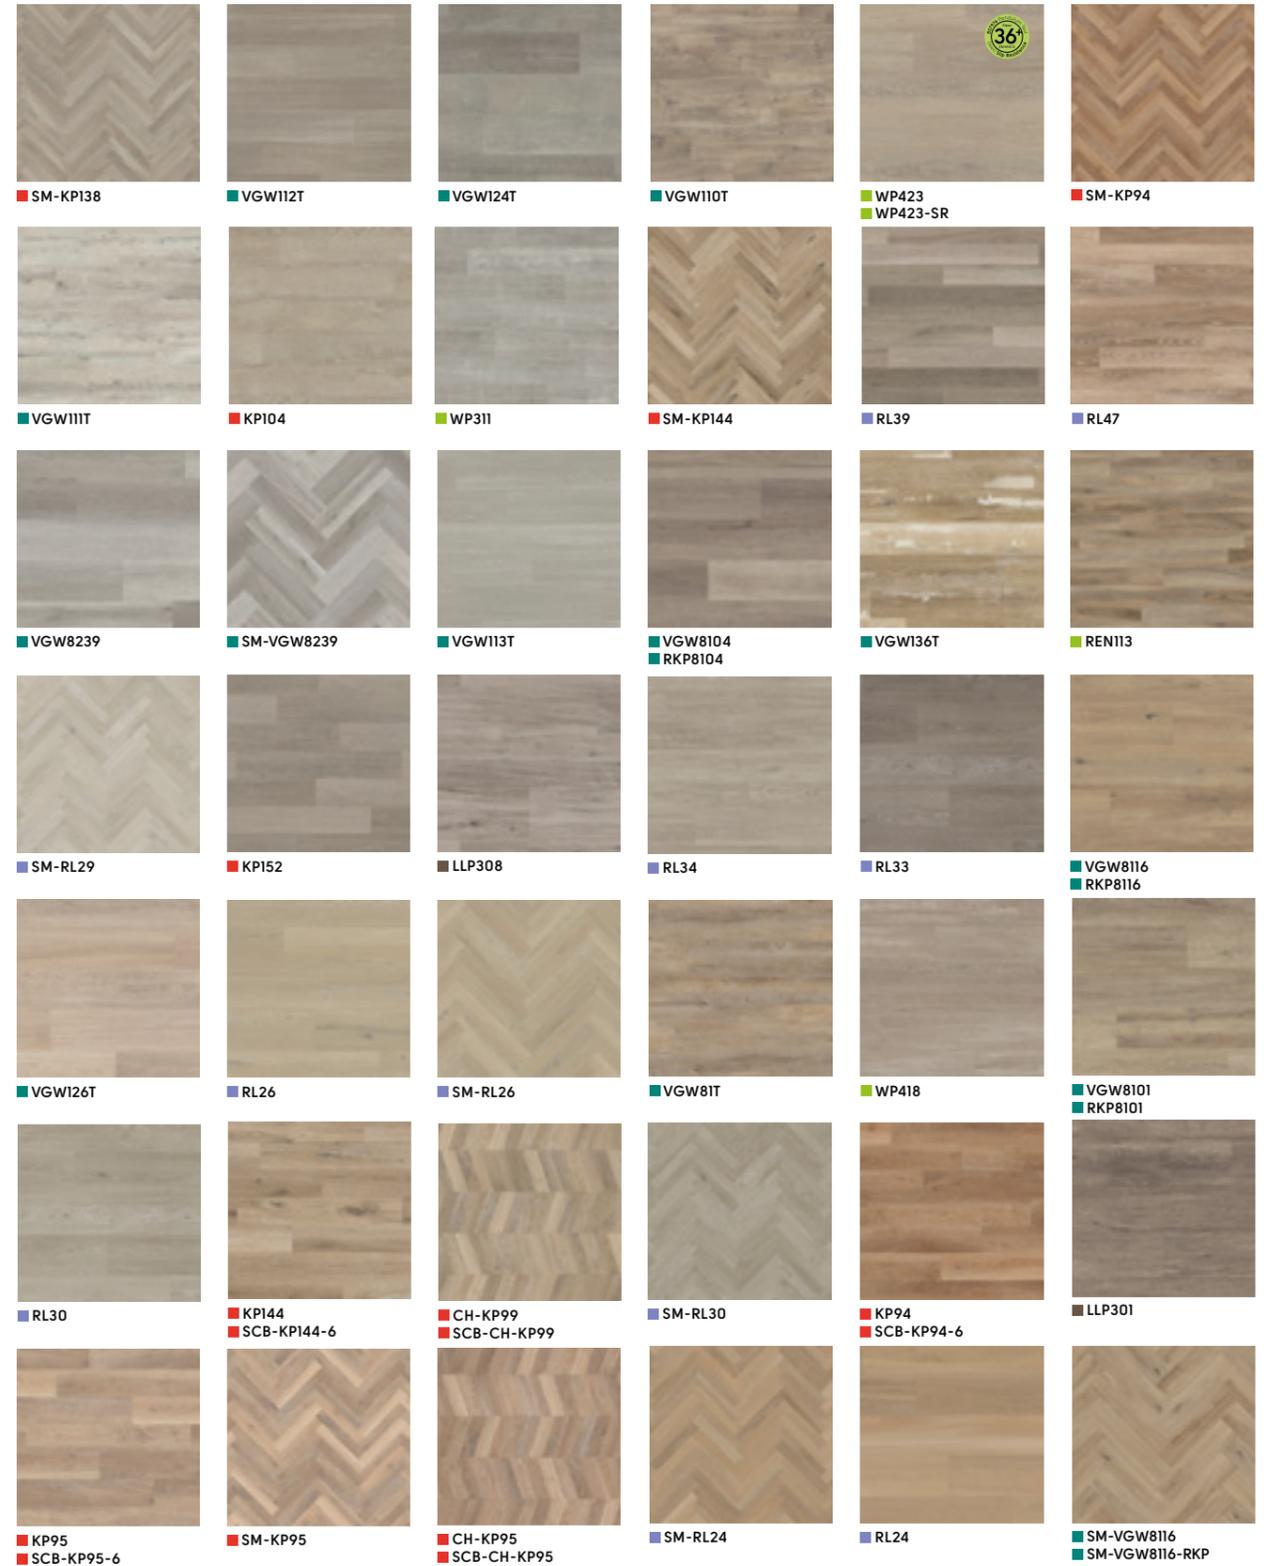


# WOOD AT A GLANCE

■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndeans LooseLay | ■ Kortlok Regent

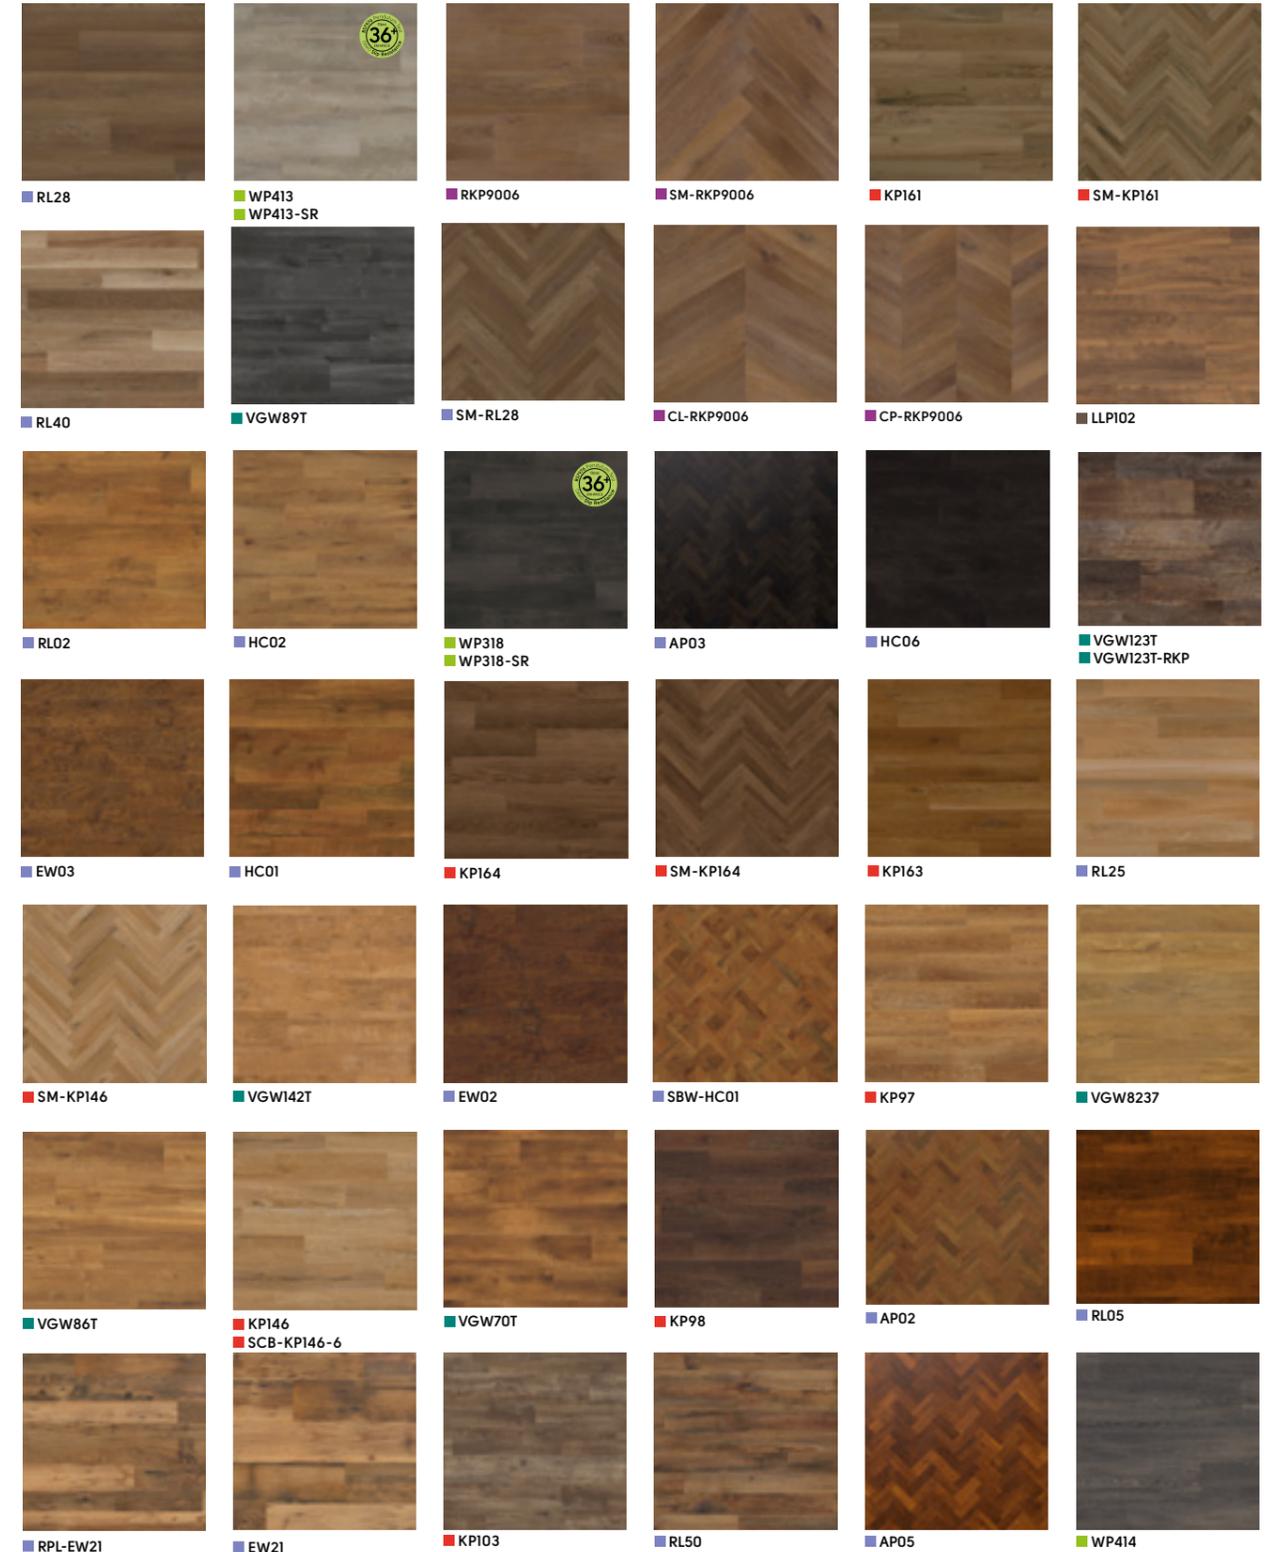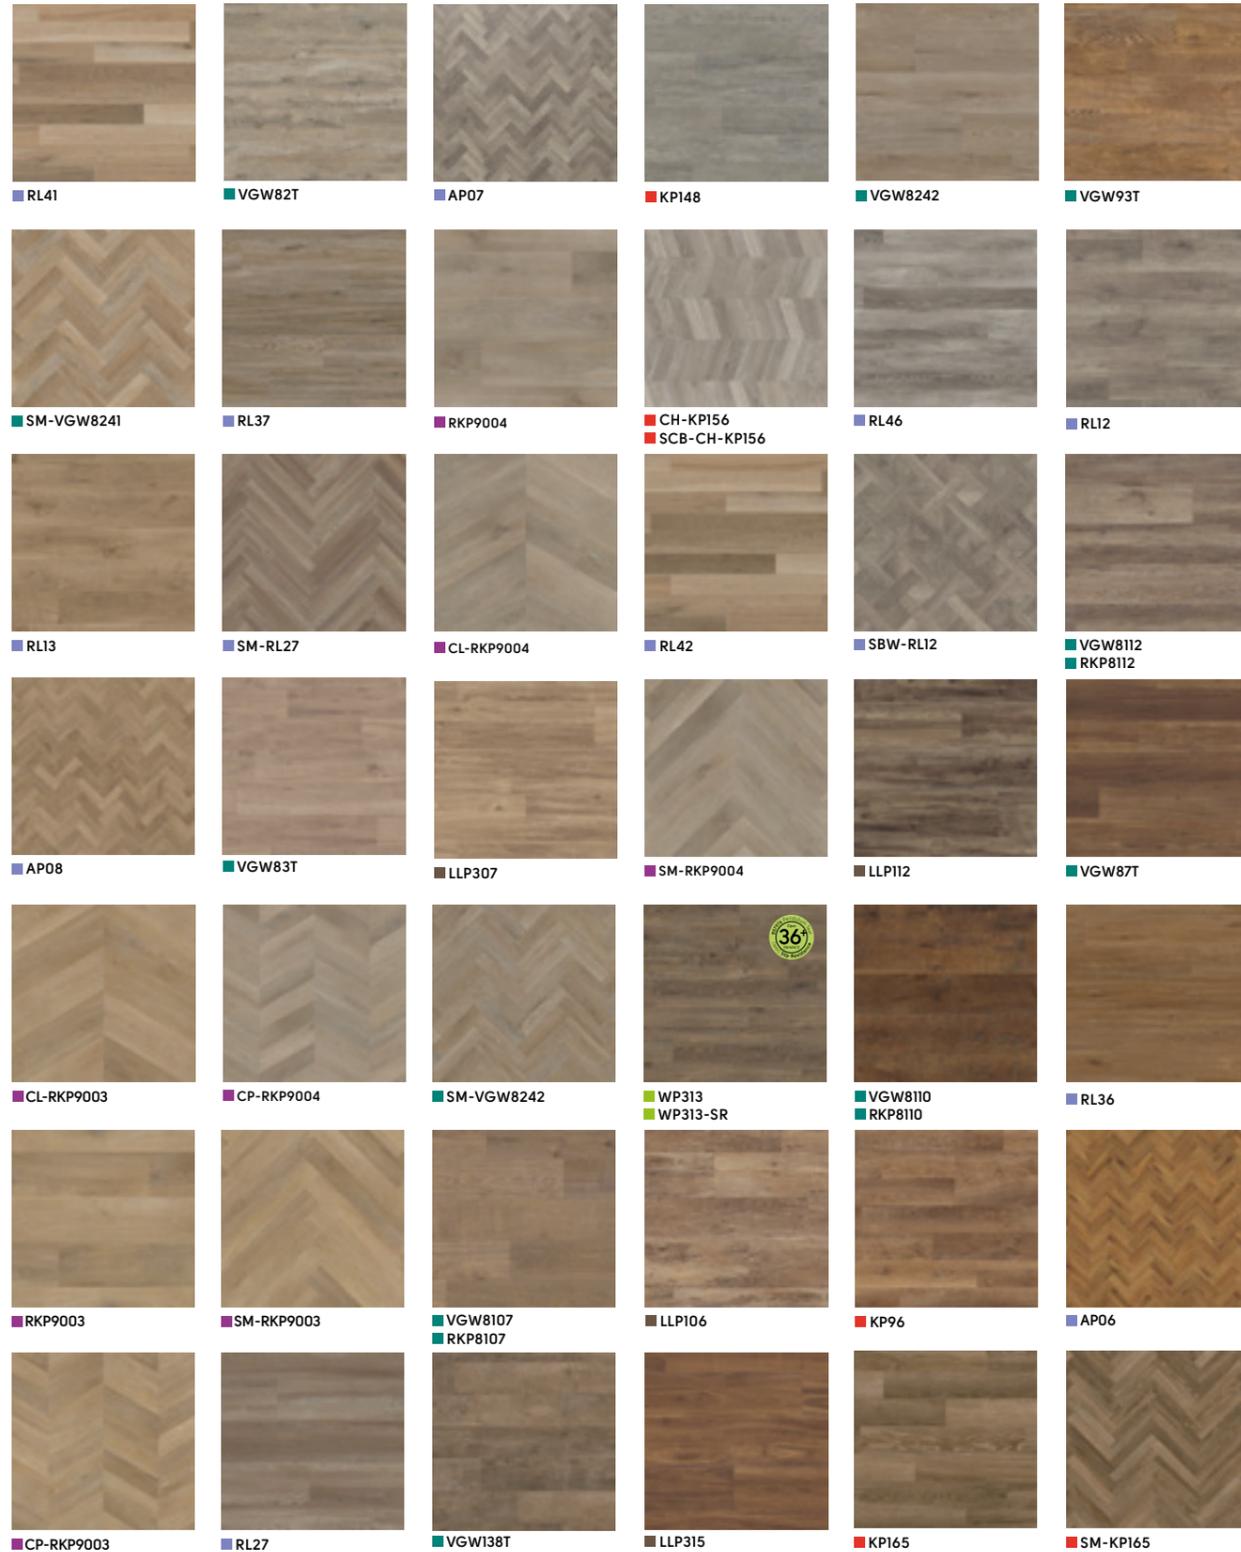



# WOOD AT A GLANCE

■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay | ■ Kortlok Regent

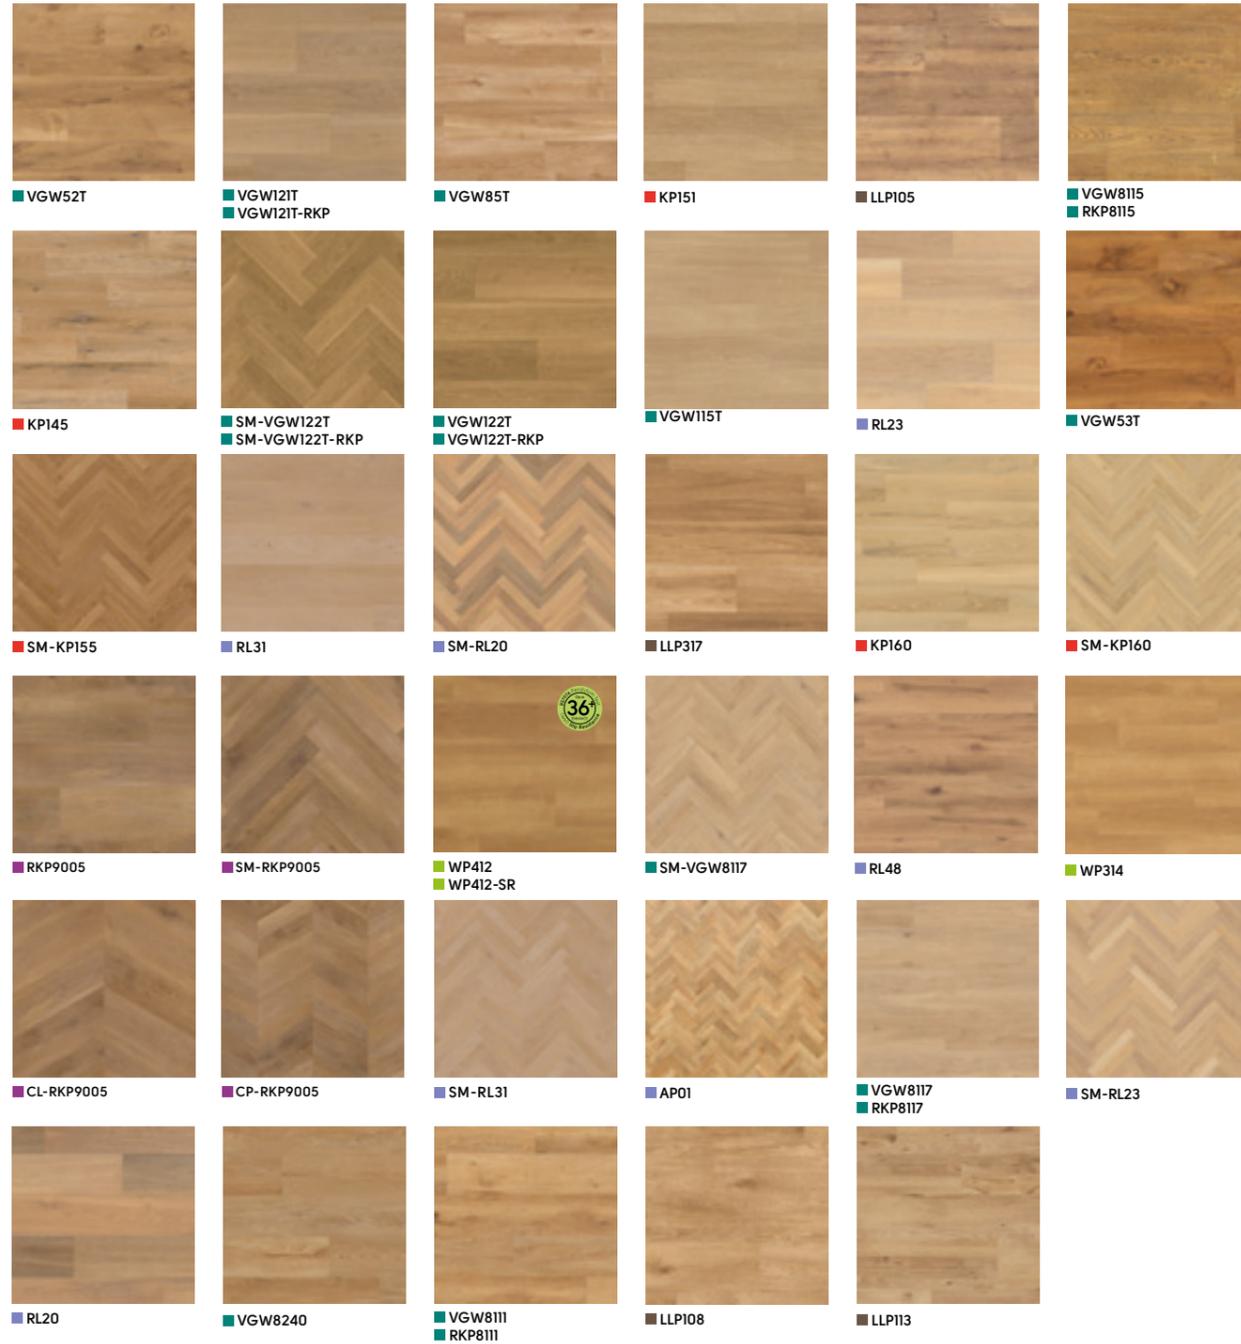

# STONE AT A GLANCE

■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay

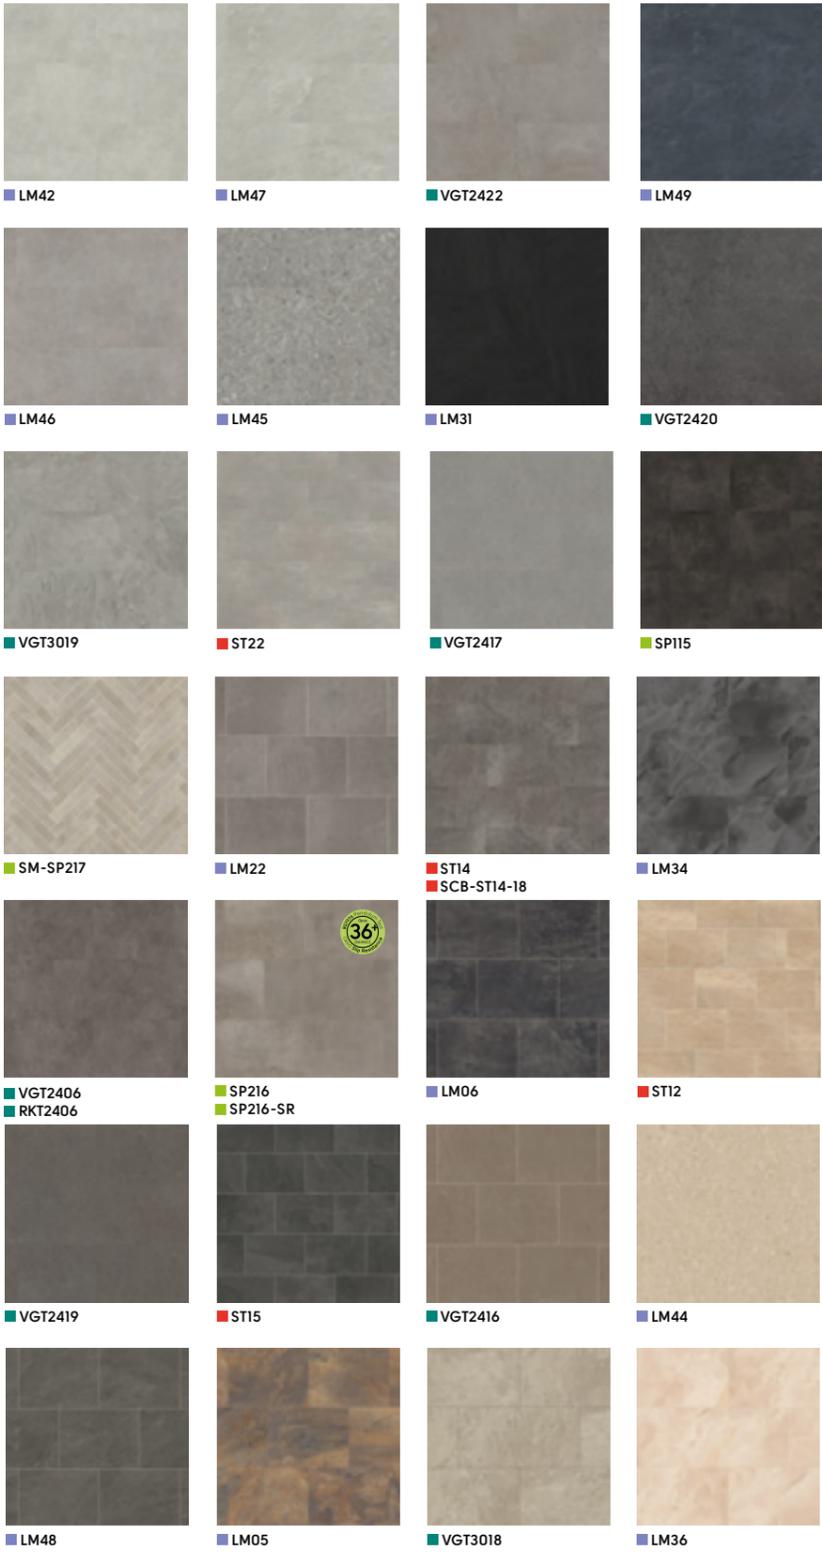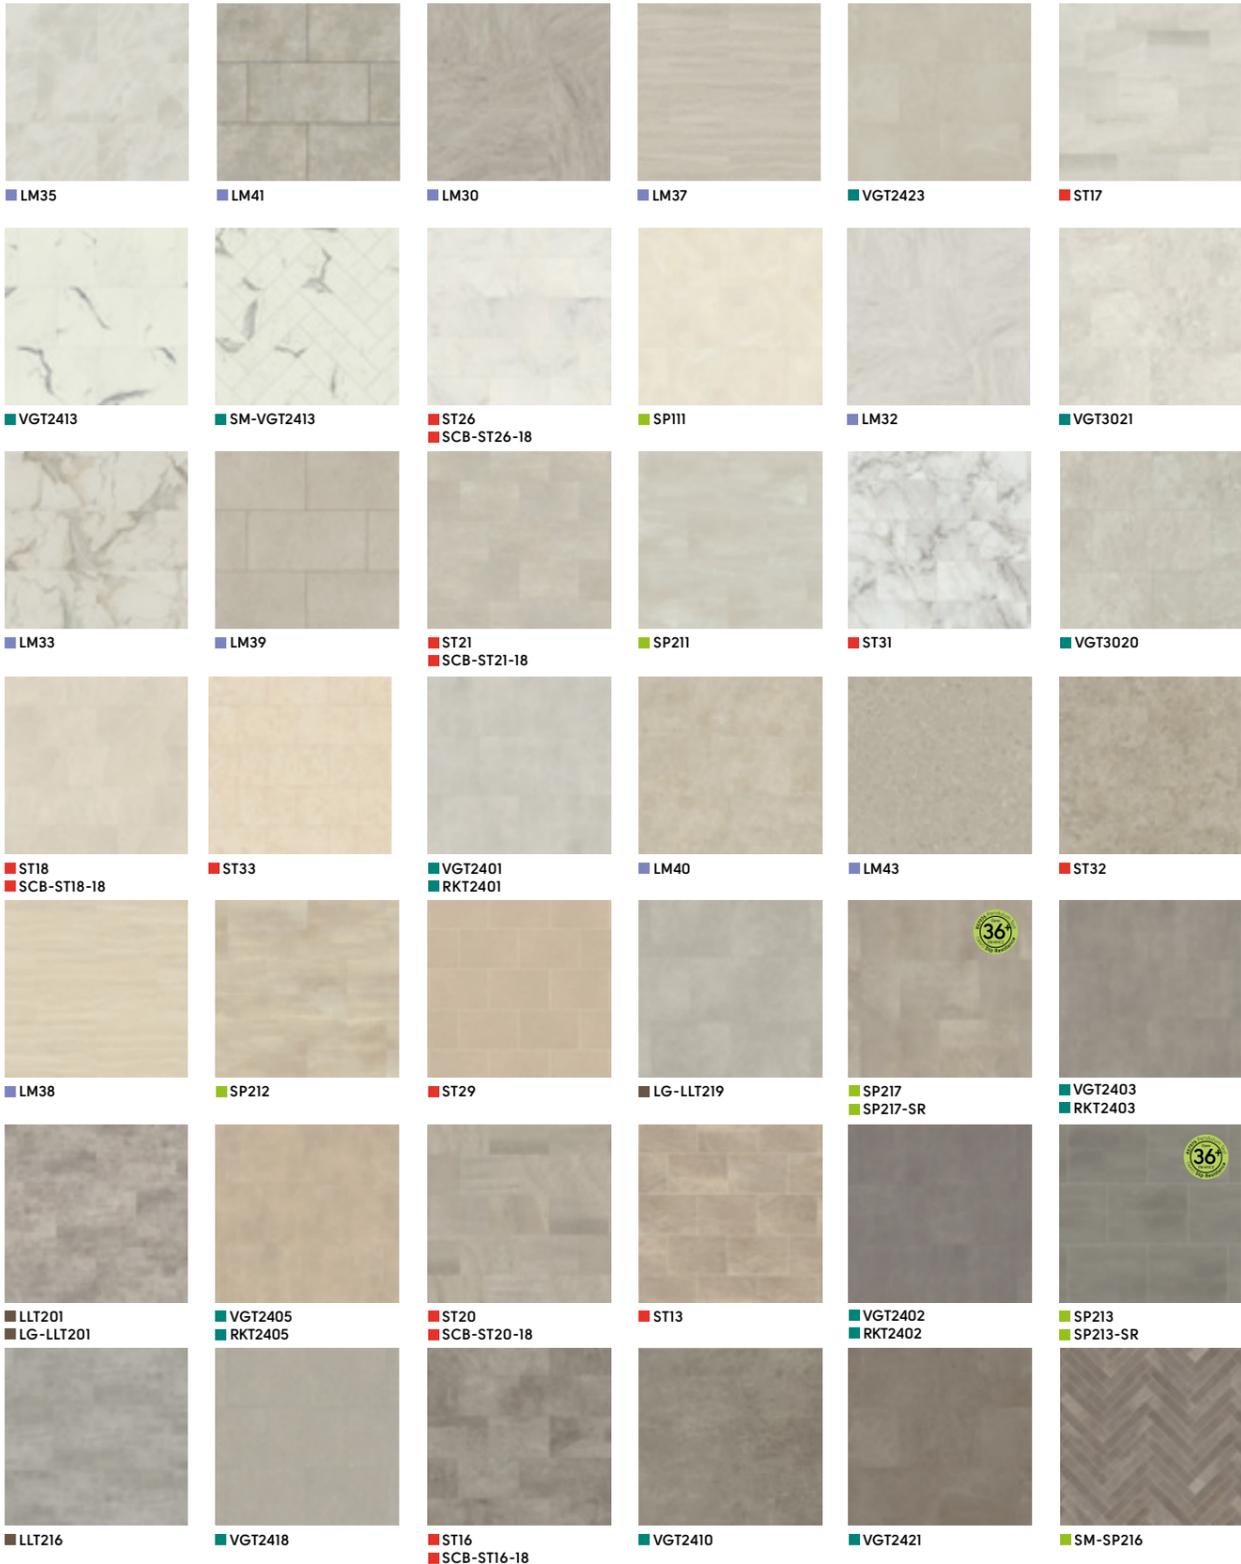




Art Select: Brenner Quartzite LM47

# ABSTRACT AT A GLANCE

■ Heritage Collection | ■ Kaleidoscope | ■ Opus



## Solid Colours

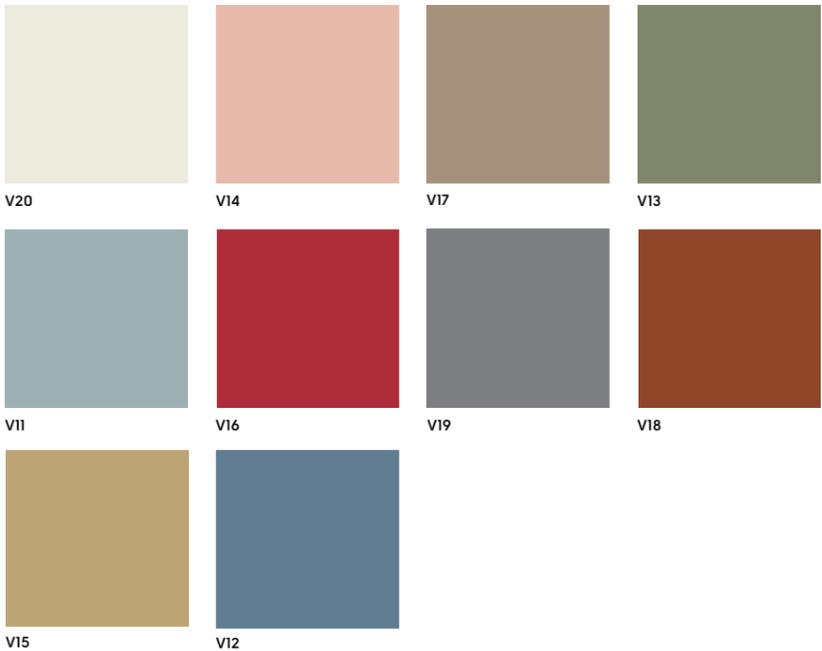


# HERITAGE COLLECTION

Designed to give the opulent look of classic geometric tiles, the Heritage Collection features striking monochrome designs and beautifully blended traditional patterns. The collection reflects both the classic elegance of Victorian and Regency buildings, and the boldness of contemporary trends. Ideal for recreating the original character of elegant period interiors or for a contemporary statement look, the collection features a tasteful mix of shades that can be used to create a totally individual look.



GLUEDOWN  
Heritage  
Collection

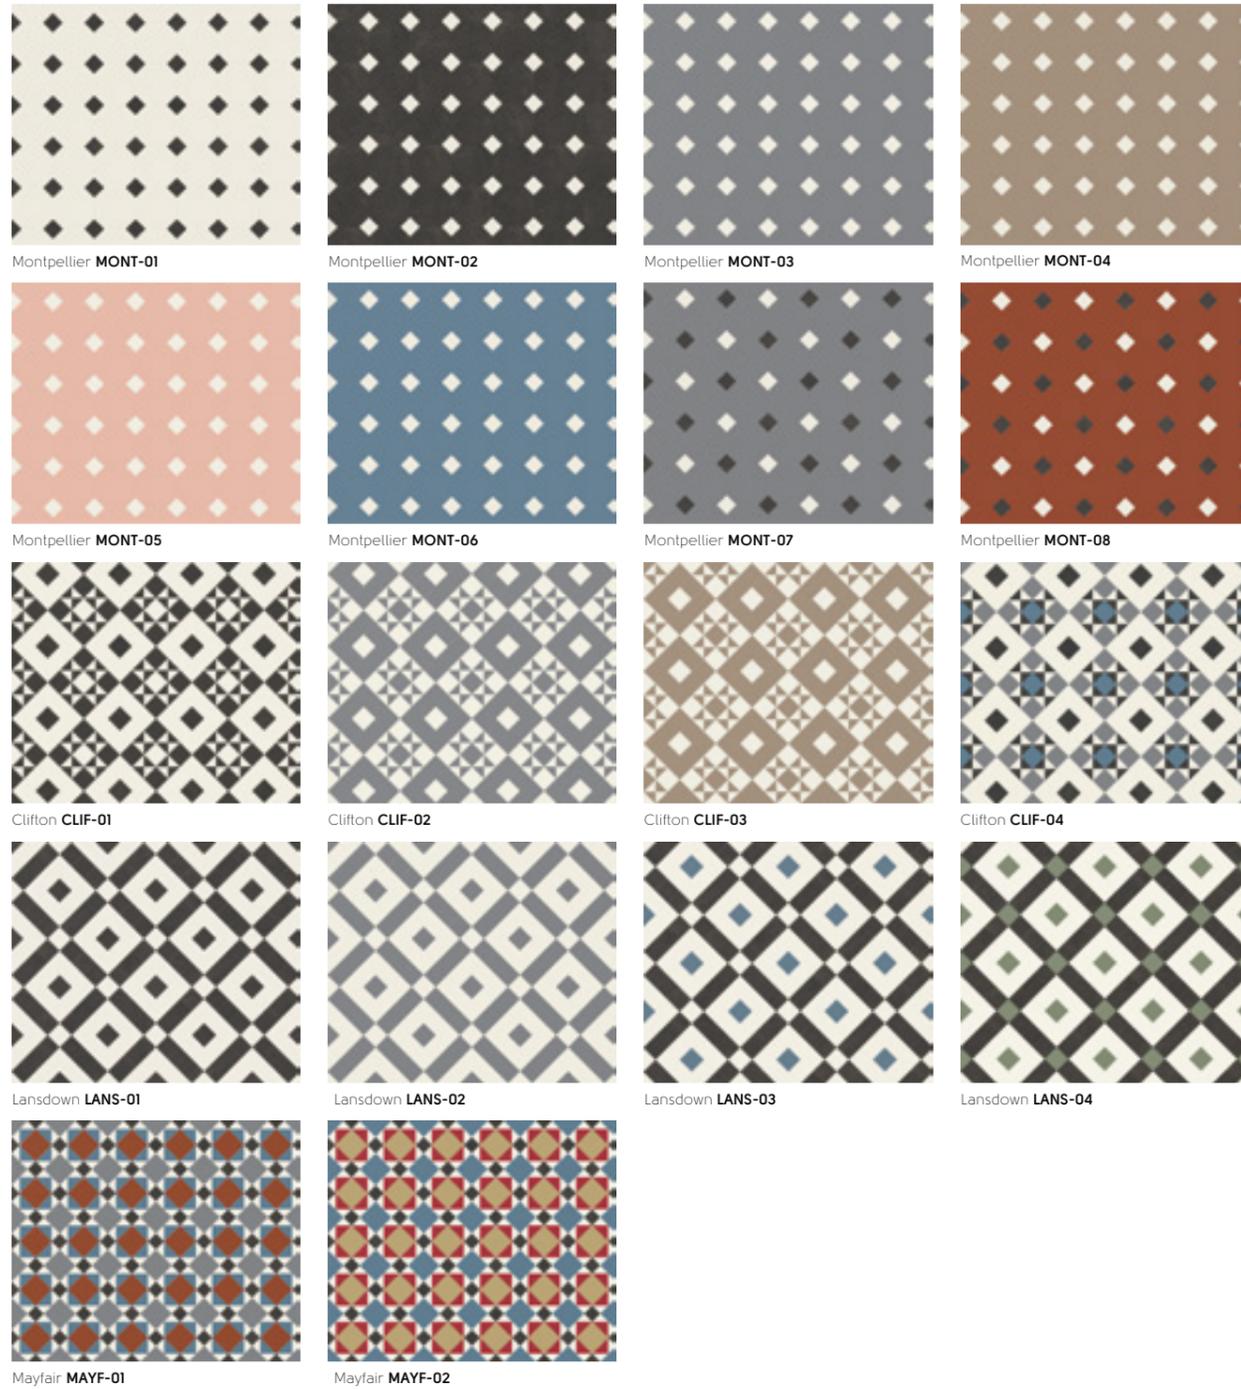

	Standard	Result
Size	EN ISO 24342	Various
Thickness	EN ISO 24346	2.5 mm
Wear layer	EN ISO 24340	Solid colours: 0.55 mm
Surface treatment		K-Guard+® PU coating
Warranty <sup>1</sup>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
Slip resistance <sup>2</sup>	EN 16165 Annex B/DIN 51130 EN 13893	See page 143
Light reflectance value (LRV)	BS 8493:2008+A1:2010	See separate table below
Recycling		Suitable
Phthalate free		Yes

<sup>1</sup> Subject to terms. Please see our website.  
<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

See our Opus & Solid Colour tech data sheet for comprehensive tech info

Bespoke statement floors can be cut with solid colours, wood and stone designs to create a unique focal point.

#### Solid colours

Product Code	LRV
V11	41
V12	21
V13	24
V14	52
V15	36
V16	13
V17	29
V18	12
V19	24
V20	71



#### Opus

Product Code	LRV
SP111	66
SP115	8




# KALEIDOSCOPE

Just like a kaleidoscope, this unique collection of woods, stones and colours can be displayed in a variety of geometric forms to give you unparalleled design flexibility.



Kaleidoscope Cubix: Luna **SP111** | Ombra **SP114\*** | Mico **SP211**

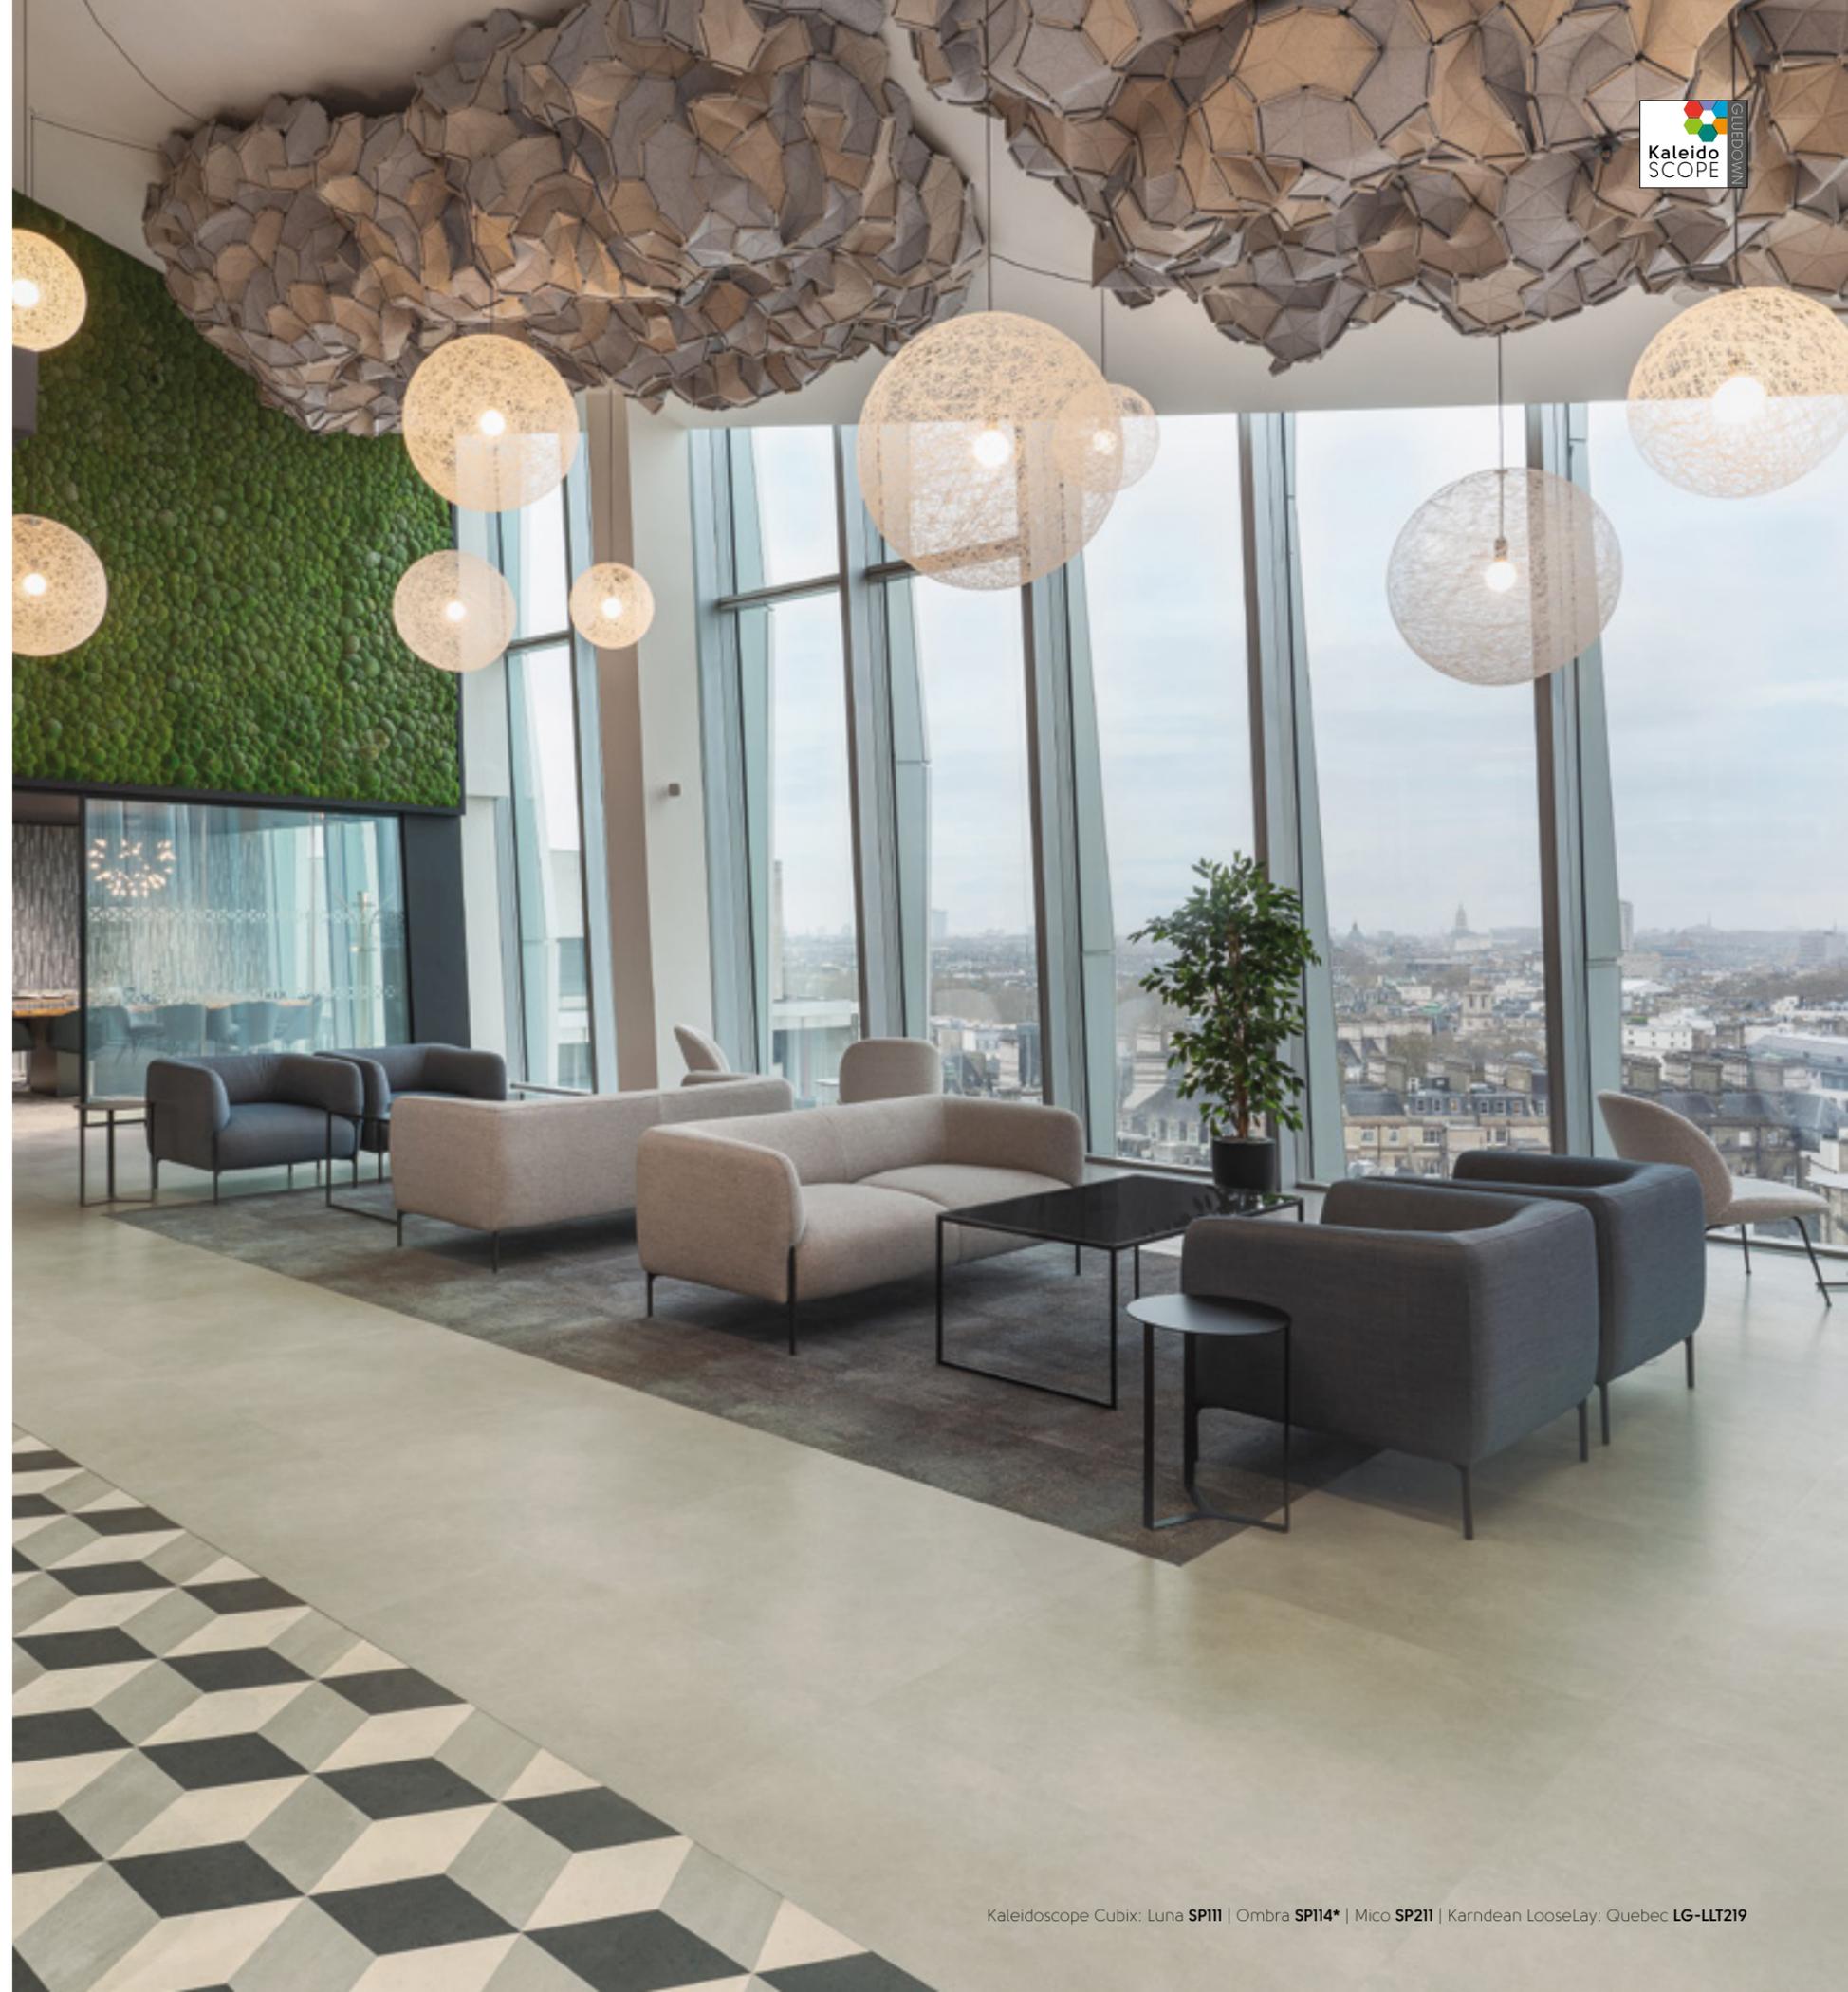

# AT A GLANCE

## Pre-cut designs


We also offer specially selected Kaleidoscope arrangements with shorter lead times and intricate designs to suit smaller spaces.



Pyramid KAL01



Cubix KAL02



Cubix KAL03



Pennon KAL04



Pennon KAL05



Apex KAL06




Apex KAL07



Hexa KAL08



Hexa KAL09



Tripoint KAL10




Cubix KAL13



Apex KAL14



Woven KAL11



Woven KAL12



Casablanca SP219





Marrakesh SP220





## Customised designs

Individual shapes are cut from original Karndeian products so that they retain our authentic designs and key technical specification including slip resistance, wear layer and light reflectance value (LRV). With over 100 designs to choose from, the precise technical specification for your Kaleidoscope configuration will depend on your final selection. We will work closely with you to ensure a smooth and efficient specifying journey.



### Apex





### Hexa





### Pyramid





### Cubix





### Pennon





### Half Pennon



### Tripoint



### Woven



# AT A GLANCE

Designed to inspire, our palette of wood, stone and solid colour designs to choose from, all cut from our individual planks and tiles, and available in a variety of thicknesses including 2mm, 2.5mm and 3mm.



## Art Select 3mm | pg 74-83



\*For Kaleidoscope use only.

## Opus 2.5mm | pg 96-103



## Solid colours 2.5mm | pg 67



## Van Gogh 3mm | pg 84-95



## Knight Tile 2mm | pg 108-119



△Available in 2mm, 2.5mm and 3mm depths.



# ART SELECT WOOD

Our Art Select wood collection is made up of our most intricate designs combined with detailed embossing techniques and elegant bevelled edges. We've taken inspiration from species found in Spain's Basque region to the English countryside, taking care to replicate the techniques used to enhance the grains and markings found on the source materials, ensuring utmost authenticity.



Art Select: Tolsford Ash RL42



Art Select  
GLUEDOWN

# AT A GLANCE

1422.4mm x 228.6mm (56.0" x 9.0")



Reclaimed Chestnut **RL21\***



Prairie Oak **RL20\***



Glacier Oak **RL21\***



Mountain Oak **RL22\***



Savannah Oak **RL23\***



Dune Oak **RL24\***



Basque Oak **RL26\***



Bellota Oak **RL27\***



Serrano Oak **RL28\***



Clay Artisan Oak **RL29\***



Dove Artisan Oak **RL30\***



Golden Artisan Oak **RL31\***



Pale Artisan Oak **RL32**



Grey Artisan Oak **RL33**

1219.2mm x 177.8mm (48.0" x 7.0")



Spring Oak **RL01\***



Summer Oak **RL02**



Spanish Cherry **RL05\***



Storm Oak **RL12\***



Salon Oak **RL13\***



Canvas Oak **RL34**



Damask Oak **RL35**



Merino Oak **RL36**



Tweed Oak **RL37**



Cotton Oak **RL38**

1219.2mm x 114.3mm (48.0" x 4.5")



Canyon Oak **RL25**



Castle Hill Ash **RL39**



Summerhouse Ash **RL40**



Canterbury Ash **RL41**



Tolsford Ash **RL42**



Limed Silk Oak **RL46**



Limed Linen Oak **RL47**



Natural Oak **RL48**

711.2mm x 114.3mm (28.0" x 4.5")



Basque Oak **SM-RL26\***



Bellota Oak **SM-RL27\***




Serrano Oak **SM-RL28\***

914.4mm x 152.4mm (36.0" x 6.0")



Hickory Peppercorn **EW02**



Hickory Nutmeg **EW03**



Dawn Oak **HC01\***



Morning Oak **HC02\***



Midnight Oak **HC06\***

457.2mm x 76.2mm (18.0" x 3.0")




Prairie Oak  
**SM-RL20\***



Dune Oak  
**SM-RL24\***



Glacier Oak  
**SM-RL21\***



Clay Artisan Oak  
**SM-RL29\***



Mountain Oak  
**SM-RL22\***



Dove Artisan Oak  
**SM-RL30\***



Savannah Oak  
**SM-RL23\***



Golden Artisan Oak  
**SM-RL31\***


228.6mm x 76.2mm (9.0" x 3.0")



Spring Oak  
**AP01\***



Morning Oak  
**AP06\***



Dawn Oak  
**AP02\***




Storm Oak  
**AP07\***



Midnight Oak  
**AP03\***



Salon Oak  
**AP08\***



Spanish Cherry  
**AP05\***

114.3mm, 152.4mm, and 228.6mm  
(4.5", 6.0", 9.0") widths in various lengths



Reclaimed Chestnut **RPL-EW21\***

Basket weave

114.3mm x 114.3mm / 304.8mm x 76.2mm  
(4.5" x 4.5" / 12" x 3")



Dawn Oak **SBW-HC01\***



Spring Oak **SBW-RL01\***



Storm Oak **SBW-RL12\***

\* Same colour available in different sizes.



	Standard	Result
<b>Size</b>	EN ISO 24342	See pages 76 and 77
<b>Thickness</b>	EN ISO 24346	3.0 mm
<b>Wear layer</b>	EN ISO 24340	0.7 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	20 years 20 years Lifetime Warranty
<b>Bevelled edge</b>		Standard
<b>Mass</b>	EN ISO 23997	5015 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN 434 / EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass ≤ (0.1 mm)
<b>Castor chair continuous use</b>	ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0147 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS See page 144 for details
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 144 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Art Select.

# ART SELECT STONE

Embodying sophistication and elegance, our Art Select stone collection replicates luxurious materials rarely seen in flooring due to fragility, difficulties in extraction and high cost. Expect our most intricate designs and realistic embosses, handcrafted to reflect the unique patterns and textures of real stone.




Art Select: Black Onyx **LM34**




Art Select: Pavimento Bianco **LM42**


457.2mm x 609.6mm (18.0" x 24.0")

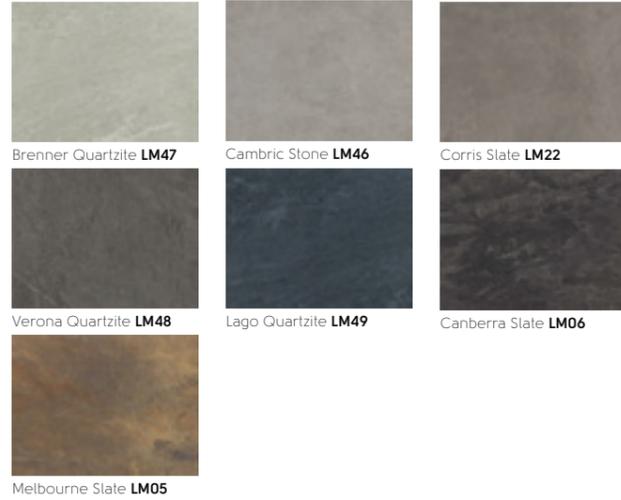

457.2mm x 457.2mm (18.0" x 18.0")



457.2mm x 914.4mm (18.0" x 36.0")

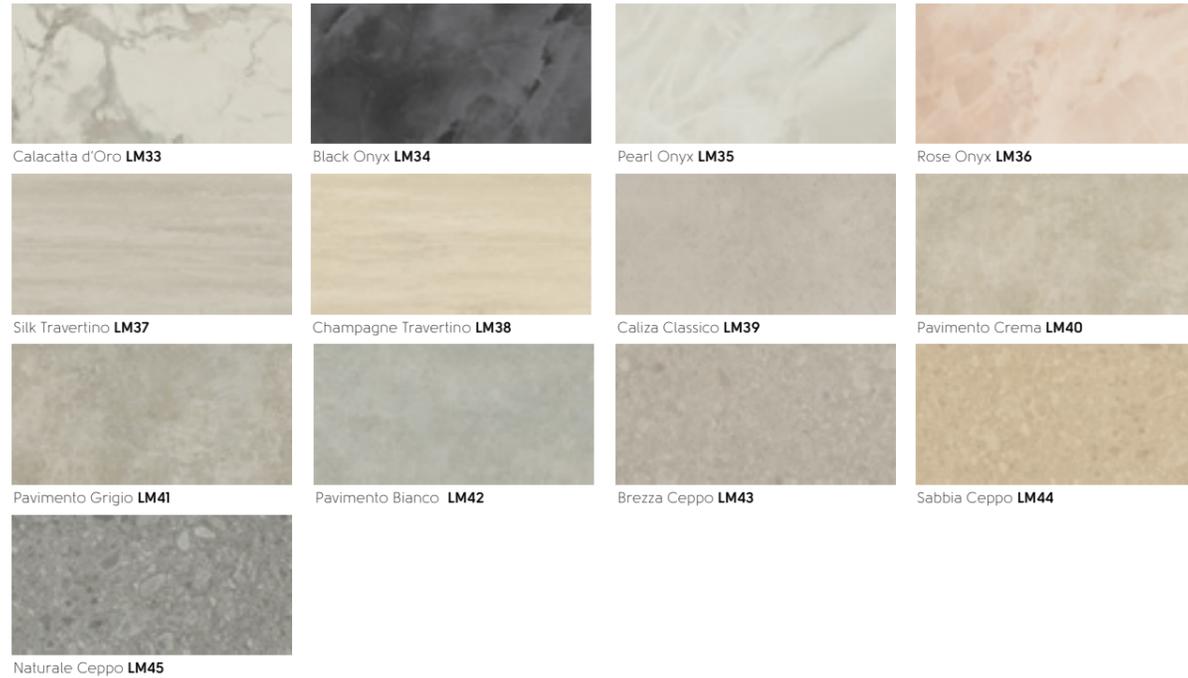

	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	3.0 mm
<b>Wear layer</b>	EN ISO 24340	0.7 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	20 years 20 years Lifetime Warranty
<b>Bevelled edge</b>		Standard
<b>Mass</b>	EN ISO 23997	5015 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	43: Light industrial heavy 34: Commercial very heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN 434 / EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass ≤ (0.1 mm)
<b>Castor chair continuous use</b>	ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0147 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS See page 152 for details
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 152 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Art Select.

# VAN GOGH WOOD

Our iconic Van Gogh collection features an array of wood designs with inspiration taken from around the world. While recognising the time constraints often associated with larger commercial projects, our design team have worked hard to ensure larger plank options are available in the collection as well as the inclusion of herringbone designs in both rigid core and gluedown formats.

Choosing rigid core you can experience the same popular designs in the Van Gogh gluedown range, but with improved acoustic qualities up to 21dB. Plus, with integrated K-Core® technology, it's perfect for uneven subfloors or preserving existing hard floors.

Matching scotias are available in our Van Gogh range.



Van Gogh: Hayfield Oak **VGW8241** | Tuscan Slate **VGT2421**



RIGID CORE  
GLUEDOWN  
Van Gogh

Van Gogh: Aviemore Oak **SM-VGW8242**

# AT A GLANCE


Gluedown: 457.2mm x 114.3mm (18.0" x 4.50")



Gluedown: 711.2mm x 177.8mm (28.0" x 7.0") | Rigid core (-RKP): 708.0mm x 177.0mm (27.87" x 6.97")



Gluedown: 1219.2mm x 177.8mm (48.0" x 7.0")

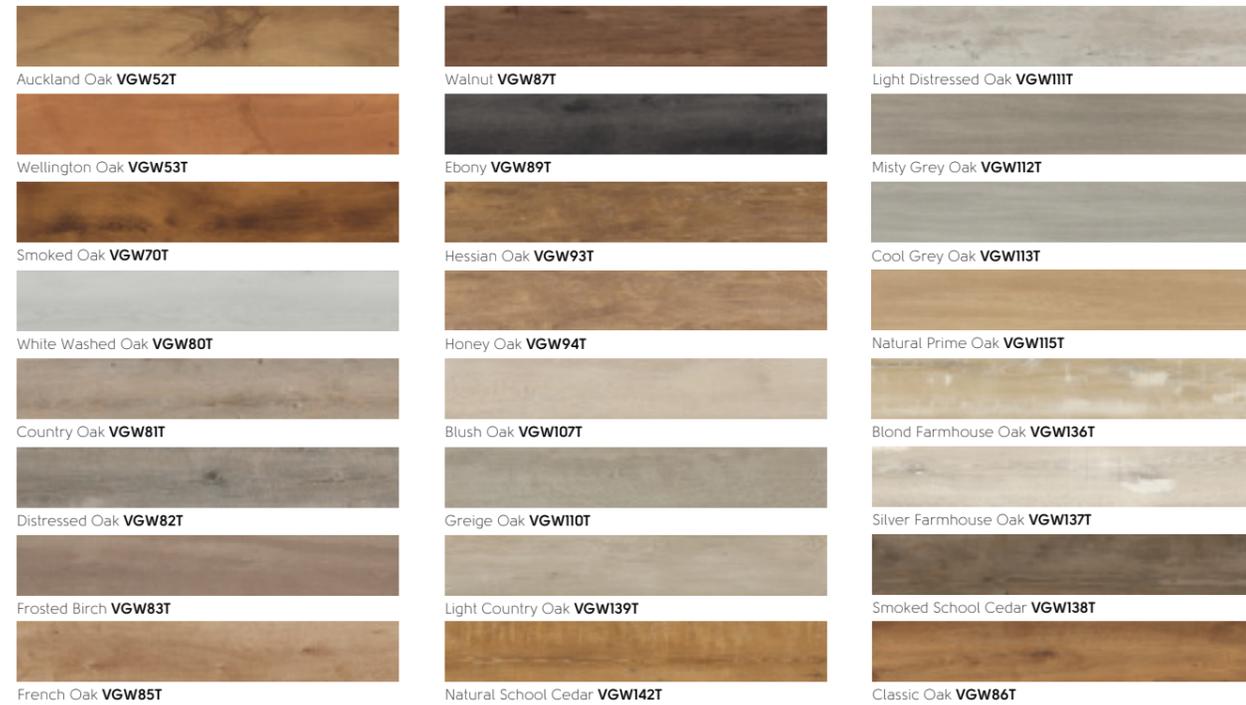

Gluedown: 1422.4mm x 228.6mm | Rigid core: 1420.0 x 225.0mm (56.0" x 9.0" | 55.91" x 8.86")



 Also available in rigid core

 \*A selection of our Van Gogh designs have been finished with a handcrafted emboss to ensure that each plank is inherently unique and thereby accentuating the distressed aesthetics of the wood.

	Standard	Result
Size	EN ISO 24342	See page 86 - 87
Thickness	EN ISO 24346	3.0 mm
Wear layer	EN ISO 24340	0.55 mm
Surface treatment		K-Guard+® PU coating
Warranty <sup>3</sup>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
Bevelled edge		Micro
Mass	EN ISO 23997	5187 g/m <sup>2</sup>
Standards	EN ISO 10582	Pass
Classification	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B <sub>fl</sub> -s1
Staining resistance	EN ISO 26987	Excellent
Light fastness	EN ISO 105-B02	Pass (≥ 7)
Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type I
Flexibility	EN ISO 24344	Pass
Dimensional stability	EN ISO 23999	Pass (≤ 0.25%)
Acoustic impact noise reduction	EN ISO 717-2/EN ISO 140-8	ΔL <sub>w</sub> = 4 dB
Electrical behaviour body voltage	EN 1815	Pass
Indentation - residual	EN ISO 24343-1	Pass (≤ 0.1 mm)
Castor chair continuous use	ISO 4918	Pass
Thermal resistance	ISO 8302	0.0118 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
Slip resistance <sup>4</sup>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	See page 145 for details
Adhesive	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
Environmental	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Silver certified product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Recycling		Suitable
Phthalate free		Yes

	Standard	Result
Size	EN ISO 24342	See page 86 - 87
Thickness	EN ISO 24346	6.5 mm
Locking system <sup>1</sup>		5G® fold down installation system <sup>1 2</sup>
Wear layer	EN ISO 24340	0.55 mm
Surface treatment		K-Guard+® PU coating
Warranty <sup>3</sup>	Commercial Residential	15 years Lifetime Warranty
Bevelled edge		Micro
Mass per unit area	EN ISO 23997	7480 g/m <sup>2</sup>
Standards	EN 16511	Pass (Multilayer modular floorcovering panels)
Classification	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
Reaction to fire	EN 13501-1	B <sub>fl</sub> -s1
Staining resistance	EN 438-2	Pass (Grade 5)
Light fastness	EN ISO 105-B02	Pass (≥ 6)
Abrasion resistance	EN 13329 Annex E	Pass (> 4,000 cycles)
Furniture chair leg	EN 424	Pass (no visible damage)
Dimensional stability	BS EN ISO 23999	Pass (≤ 0.25%)
Swelling	ISO 24336	Pass (0.2%)
Acoustic impact noise reduction	EN ISO 10140-1:2016	ΔL <sub>w</sub> = 21 dB
Indentation - residual	ISO 24343-1	Pass (≤ 0.1 mm)
Impact resistance	EN 13329 Annex F	Pass (> 1800 mm)
Castor chair continuous use	EN 425 / EN ISO 4918	Pass (25,000 cycles)
Thermal resistance	ISO 8302	0.0515 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
Slip resistance <sup>4</sup>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
Light reflectance value (LRV)	BS 8493:2008+A1:2010	See page 150 for details
Adhesive	None required; please install according to our installation instructions.	
Environmental	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
Recycling		Suitable
Phthalate free		Yes

<sup>1</sup> 5G® and 2G™ are patented technologies invented by Välinge Innovation AB. The 5G® and 2G™ word marks and logos are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> 5G® short edge; 2G™ long edge except SM-VGW120T-RKP, SM-VGW121T-RKP, SM-VGW122T-RKP, SM-VGW123T-RKP, SM-VGW105-RKP, SM-VGW116-RKP which are modified 2G™ on short edge and standard 2G™ on long edge.

<sup>3</sup> Subject to terms. Please see our website.

<sup>4</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Van Gogh.

# VAN GOGH STONE

Van Gogh's stone collection provides specifiers with the option to choose from a wide range of tones and styles to suit a variety of spaces. Offering the look of striking marbles and natural stones, but with the benefits of luxury vinyl, these new additions allow for more flexibility during specification, and greater design possibilities.



Van Gogh: Venetian Slate VGT2423



# AT A GLANCE

Gluedown: 177.8mm x 711.2mm (7.0' x 28.0')



Palazzo Marble **SM-VGT2413**

Gluedown: 457.2mm x 609.6mm (18.0' x 24.0') | Rigid core: 457.0mm x 600.0mm (17.99' x 23.62')



Frosted Stone **VGT2401 | RKT2401**



Urban Grey **VGT2402 | RKT2402**



Metro Grey **VGT2403 | RKT2403**



Cotswold Stone **VGT2405 | RKT2405**



Volcanic Black **VGT2406 | RKT2406**



Pebble Grey **VGT2410**



Palazzo Marble **VGT2413**




Bronze Castello Marble **VGT2416**



Grey Castello Marble **VGT2417**




Dove Castello Marble **VGT2418**



Graphite Castello Marble **VGT2419**



Milanese Slate **VGT2420**



Tuscan Slate **VGT2421**



Roman Slate **VGT2422**




Venetian Slate **VGT2423**




Also available in rigid core

Gluedown: 457.2mm x 914.4mm (18.0' x 36.0')

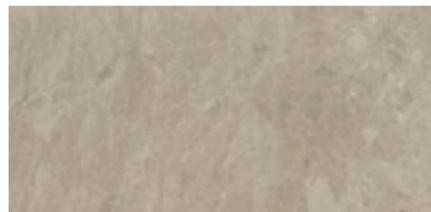

Tortora Breccia Marble **VGT3018**

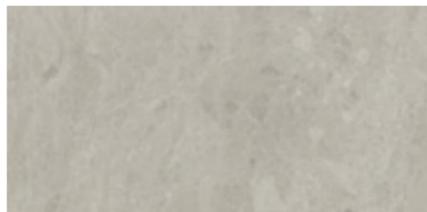

Luna Breccia Marble **VGT3020**



Grigio Breccia Marble **VGT3019**



Bianco Breccia Marble **VGT3021**



Van Gogh: Bianco Breccia Marble **VGT3021**

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 92
<b>Thickness</b>	EN ISO 24346	3.0 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>3</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass</b>	EN ISO 23997	5187 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 7)
<b>Abrasion resistance</b>	EN 660-2 EN ISO 10582	Group T Type I
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2/EN ISO 140-8	ΔL <sub>w</sub> = 4 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0118 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>4</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 154 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort  Floorscore SCS-EC10.3-2014 v4.0  Environmental Product Declaration  NSF/ANSI 332  ISO 14001 / ISO 9001	Gold certification; Compliant low emitting VOC emissions.  Indoor air quality certified; Compliant low emitting VOC emissions.  External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Silver certified product  Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 92
<b>Thickness</b>	EN ISO 24346	6.5 mm
<b>Locking system<sup>1</sup></b>		5G® fold down installation system <sup>1 2</sup>
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>3</sup></b>	Commercial Residential	15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass per unit area</b>	EN ISO 23997	7480 g/m <sup>2</sup>
<b>Standards</b>	EN 16511	Pass (Multilayer modular floorcovering panels)
<b>Classification</b>	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN 438-2	Pass (Grade 5)
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN 13329 Annex E	Pass (> 4,000 cycles)
<b>Furniture chair leg</b>	EN 424	Pass (no visible damage)
<b>Dimensional stability</b>	BS EN ISO 23999	Pass (≤ 0.25%)
<b>Swelling</b>	ISO 24336	Pass (0.2%)
<b>Acoustic impact noise reduction</b>	EN ISO 10140-1:2016	ΔL <sub>w</sub> = 21 dB
<b>Indentation - residual</b>	ISO 24343-1	Pass (≤ 0.1 mm)
<b>Impact resistance</b>	EN 13329 Annex F	Pass (> 1800 mm)
<b>Castor chair continuous use</b>	EN 425 / EN ISO 4918	Pass (25,000 cycles)
<b>Thermal resistance</b>	ISO 8302	0.0515 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>4</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 156 for details
<b>Adhesive</b>	None required; please install according to our installation instructions.	
<b>Environmental</b>	Indoor Air Comfort  Floorscore SCS-EC10.3-2014 v4.0  ISO 14001 / ISO 9001	Gold certification Compliant low emitting VOC emissions.  Indoor air quality certified; Compliant low emitting VOC emissions.  Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> 5G® and 2G™ are patented technologies invented by Välinge Innovation AB. The 5G® and 2G™ word marks and logos are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> 5G® short edge; 2G™ long edge except SM-VGW120T-RKP, SM-VGW121T-RKP, SM-VGW122T-RKP, SM-VGW123T-RKP, SM-VGW8105-RKP, SM-VGW8116-RKP which are modified 2G™ on short edge and standard 2G™ on long edge.

<sup>3</sup> Subject to terms. Please see our website.

<sup>4</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Van Gogh.

# OPUS WOOD

Our fresh, modern collection Opus combines flexible layout options, stylish design and durability. Opus offers versatility that's quick to install. Designed with commercial spaces in mind, our Opus Enhance products have a rougher surface texture, proven to improve slip resistance.



Opus: Grano WP311 | Ignea WP313



# AT A GLANCE



1219.2mm x 228.6mm (48.0" x 9.0")



Niveus **WP411** | **WP411-SR**



Primo **WP412** | **WP412-SR**



Magna **WP413** | **WP413-SR**



Argen **WP414**



Pallida **WP418**



Fabrica **WP419**



Columba **WP422** | **WP422-SR**



Avena **WP423** | **WP423-SR**

914.4mm x 152.4mm (36.0" x 6.0")



Grano **WP311**



Ignea **WP313** | **WP313-SR**



Cera **WP314**



Carbo **WP318** | **WP318-SR**

914.4mm x 101.6mm (36.0" x 4.0")



Weathered Elm **REN113**

## Opus Enhance

A number of our Opus products are available with an enhanced finish and rougher surface texture, specifically for use in commercial areas. Assessed using a pendulum wet test (BS7976), Opus Enhance achieved 36 and above, reflecting an improved slip resistance. Look out for the 36+ logo on relevant products. See Product Overview on page 147 for results.



	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	2.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass</b>	EN ISO 23997	4398 g/m <sup>2</sup>   4270 g/m <sup>2</sup> (Opus Enhance only)
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6) (Opus Enhance only)
<b>Abrasion resistance</b>	EN 649 EN ISO 10582	Group T Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0097 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 DIN 51130 BS7976	DS R10 (Opus Enhance: R11) > 36 (Opus Enhance only)
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 147 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Opus.

# OPUS STONE

Experience Opus contemporary elegance in our beautiful stone range. Varying in shades of creamy whites and darker tones, these tiles are available in both poured concrete and polished limestone looks. Opus Enhance features four designs in our stone collection with an increased slip rating, tailored to wet-prone environments.



Opus: Terra **SP212** | Urbus **SP213**



Opus: Argento **SM-SP217** | **SP217** | DS10 3mm design strip


# AT A GLANCE



457.2mm x 457.2mm (18.0" x 18.0")



Luna SP111



Nero SP115

457.2mm x 609.6mm (18.0" x 24.0")



Mico SP211



Terra SP212



Urbus SP213 | SP213-SR



Fumo SP216\* | SP216-SR



Argento SP217\* | SP217-SR

76.2mm x 457.2mm (3.0" x 18.0")



Fumo SM-SP216\*



Argento SM-SP217\*

\* Same colour available in different sizes.

## Opus Enhance

A number of our Opus products are available with an enhanced finish and rougher surface texture, specifically for use in commercial areas. Assessed using a pendulum wet test (BS7976), Opus Enhance achieved 36 and above, reflecting an improved slip resistance. Look out for the 36+ logo on relevant products. See Product Overview on page 154 for results.



	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	2.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass</b>	EN ISO 23997	4398 g/m <sup>2</sup>   4270 g/m <sup>2</sup> (Opus Enhance only)
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6) (Opus Enhance only)
<b>Abrasion resistance</b>	EN 649 EN ISO 10582	Group T Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0097 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 DIN 51130 BS7976	DS R10 (Opus Enhance: R11) > 36 (Opus Enhance only)
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 154 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Opus.

# OPUS ABSTRACT



Our much loved Opus abstract capsule collection designed to offer complete creative freedom to architects and interior designers looking to make a statement with a unique floor. With inspiration from around the world, we curated a palette of 24 colourways mimicking natural stone, textiles and man-made materials.

This collection allows you to marry organic pigments with marvellous terrazzo from the Adriatic coast in innovative flooring design. Discover stucco, reimagined for the 21st century, alongside stencilled abstractions against timeless natural stone and the modern allure of speckled concretes.

What's more, this collection works seamlessly with the rest of the Opus collection, allowing you to broaden your creative spectrum. Craft symmetrical patterns for harmonious movement or explore offset designs for playful uniformity that takes abstract flooring to a whole new level.




Opus: Burnt Sienna SP719 | Indigo SP720 | Zinc SP722 | Yellow Ochre SP726 | Black Iron SP727


# AT A GLANCE




457.2mm x 457.2mm (18.0" x 18.0")




Dolce **SP119**



Pietra **SP120**



Dalmata **SP121**



Salute Blanco **SP122**

152.4mm x 914.4mm (6.0" x 36.0")



Burnt Sienna **SP719**



Indigo **SP720**



Amber **SP721**



Zinc **SP722**



Chalk Grey **SP724**



Yellow Ochre **SP726**



Black Iron **SP727**


457.2mm x 914.4mm (18.0" x 36.0")



Zinc **SP723**



Chalk Grey **SP725**



Black Iron **SP728**



San Marco **SP729**



Leoncini **SP730**



Stratus **SP731**



Umbra **SP732**



Contarini **SP734**



Tizina **SP735**



Interseco **SP736**



Statera **SP737**



Industria **SP738**



Concreto **SP739**

	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	2.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass</b>	EN ISO 23997	4398 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 2 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0097 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 143 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort  Floorscore SCS-EC10.3-2014 v4.0  Environmental Product Declaration  NSF/ANSI 332  ISO 14001 / ISO 9001	Gold certification; Compliant low emitting VOC emissions.  Indoor air quality certified; Compliant low emitting VOC emissions.  External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Conformant product  Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Opus.

# KNIGHT TILE WOOD

Our Knight Tile collection covers a range of colours, including rustic, lime washed and white painted looks in both standard, slim and herringbone plank sizes. Extremely versatile and hardwearing, this collection lends itself well to the housebuild sector. For flexibility in fixing types, a selection of our Knight Tile products are available in a rigid core format.



Knight Tile: Cocoa Limed Oak SM-KP165



RIGID CORE  
GLUEDOWN  
Knight Tile

# AT A GLANCE

Gluedown: 1219.2mm x 228.6mm (48.0" x 9.0") | Rigid core (SCB-): 1220.0mm x 225.0mm (48.03" x 8.86")



Rose Washed Oak **CH-KP95** | **SCB-CH-KP95**



Lime Washed Oak **CH-KP99** | **SCB-CH-KP99**



Grey Washed Oak **CH-KP156** | **SCB-CH-KP156**

Gluedown: 914.4mm x 152.4mm (36.0" x 6.0") | Rigid core (SCB-): 914.4mm x 150.0mm (36.0" x 5.91")



Pale Limed Oak **KP94** | **SCB-KP94-6**



White Painted Oak **KP105**



Traditional Character Oak **KP146** | **SCB-KP146-6**



Rose Washed Oak **KP95** | **SCB-KP95-6**



Washed Scandi Pine **KP132**



Coastline Oak **KP147**



Mid Limed Oak **KP96**



Grey Limed Oak **KP138** | **SCB-KP138-6**



Quayside Oak **KP148**



Classic Limed Oak **KP97**



Natural Studio Oak **KP151**



Grey Studio Oak **KP152**



Aged Oak **KP98**



Washed Character Oak **KP144** | **SCB-KP144-6**



Nordic Limed Oak **KP153**



Lime Washed Oak **KP99** | **SCB-KP99-6**



Light Worn Oak **KP104**



Dutch Limed Oak **KP154** | **SCB-KP154-6**



Mid Worn Oak **KP103**



Natural Character Oak **KP145**



Honey Limed Oak **KP155**



Norfolk Acacia **KP159<sup>Δ</sup>**



Wells Acacia **KP160<sup>Δ</sup>**



Duxbury Acacia **KP161<sup>Δ</sup>**



Russet Character Oak **KP163<sup>Δ</sup>**



Nutmeg Limed Oak **KP164<sup>Δ</sup>**



Cocoa Limed Oak **KP165<sup>Δ</sup>**

Gluedown: 457.2mm x 76.2mm (18.0" x 3.0")



Pale Limed Oak **SM-KP94**



Traditional Character Oak **SM-KP146**



Honey Limed Oak **SM-KP155**



Duxbury Acacia **SM-KP161<sup>Δ</sup>**



Rose Washed Oak **SM-KP95**



Grey Limed Oak **SM-KP138**



Dutch Limed Oak **SM-KP154**



Nutmeg Limed Oak **SM-KP164<sup>Δ</sup>**



Lime Washed Oak **SM-KP99**



Washed Character Oak **SM-KP144**



Wells Acacia **SM-KP160<sup>Δ</sup>**



Cocoa Limed Oak **SM-KP165<sup>Δ</sup>**

<sup>Δ</sup> Available from August 2025

 Also available in rigid core



Knight Tile: Wells Acacia **SM-KP160** Cocoa Limed Oak **SM-KP165**

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 110
<b>Thickness</b>	EN ISO 24346	2.0 mm
<b>Wear layer</b>	EN ISO 24340	0.3 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial Residential	10 years Lifetime Warranty
<b>Bevelled edge</b>		None
<b>Mass</b>	EN ISO 23997	3605 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Commercial EN ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 1 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0084 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>3</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 148 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 110
<b>Thickness</b>	EN ISO 24346	4.5 mm
<b>Locking system<sup>1</sup></b>		2G™ angling installation system
<b>Wear layer</b>	EN ISO 24340	0.3 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial Residential	10 years Lifetime Warranty
<b>Bevelled edge</b>		None
<b>Mass per unit area</b>	EN ISO 23997	7600 g/m <sup>2</sup>
<b>Standards</b>	EN 16511	Pass (Multilayer modular floorcovering panels)
<b>Classification</b>	ISO 10874 - Commercial ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN 438-2	Pass (Grade 5)
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN 13329 Annex E	Pass (> 1200 cycles)
<b>Furniture chair leg</b>	EN 424	Pass (no visible damage)
<b>Dimensional stability</b>	EN 434 / EN ISO 23999	Pass (≤ 0.25%)
<b>Swelling</b>	ISO 24336	Pass (1.7%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 19 dB
<b>Indentation - residual</b>	ISO 24343-1	Pass (≤ 0.1 mm)
<b>Impact resistance</b>	EN 13329 Annex F	Pass (> 1800 mm)
<b>Castor chair continuous use</b>	EN 425 / EN ISO 4918	Pass (25,000 cycles)
<b>Thermal resistance</b>	ISO 8302	0.0184 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>3</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 150 for details
<b>Adhesive</b>	None required; please install according to our installation instructions.	
<b>Environmental</b>	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> Subject to terms. Please see our website.

<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



# KNIGHT TILE STONE

Our Knight Tile collection is the perfect partner to modern developments and housebuild projects. Available in a variety of colours from the marble effect of Frosted Marble and River Marble to the darker hues found in our Cumbrian Stone and Black Riven Slate. For flexibility in fixing types, a selection of our Knight Tile products are available in a rigid core format.



Knight Tile: Honed Oyster Slate **ST17**



RIGID CORE  
GLUEDOWN  
Knight Tile

Knight Tile: River Marble **ST31**

# AT A GLANCE

Gluedown: 304.8mm x 457.2mm (12.0" x 18.0") | Rigid core (SCB-): 304.8mm x 457.2mm (12.0" x 18.0")




Bath Stone **ST12**



Portland Stone **ST13**




Cumbrian Stone **ST14 | SCB-ST14-18**



Black Riven Slate **ST15**



Grey Riven Slate **ST16 | SCB-ST16-18**



Honed Oyster Slate **ST17**




Ivory Riven Slate **ST18 | SCB-ST18-18**




Frosted Marble **ST26 | SCB-ST26-18**



Honed Pebble Slate **ST20 | SCB-ST20-18**



Dove Grey Concrete **ST21 | SCB-ST21-18**




Natural Stone **ST29**



Smoked Concrete **ST22**



River Marble **ST31**<sup>△</sup>



Lunar Limestone **ST32**<sup>△</sup>



Natural Limestone **ST33**<sup>△</sup>

<sup>△</sup> Available from August 2025



Also available in rigid core



Knight Tile: Lunar Limestone **ST32** Natural Limestone **ST33**

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 116
<b>Thickness</b>	EN ISO 24346	2.0 mm
<b>Wear layer</b>	EN ISO 24340	0.3 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial Residential	10 years Lifetime Warranty
<b>Bevelled edge</b>		None
<b>Mass</b>	EN ISO 23997	3605 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Commercial EN ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.25%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 1 dB
<b>Electrical behaviour body voltage</b>	EN 1815	Pass
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0084 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>3</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 155 for details
<b>Adhesive</b>	Karndean Universal Silane Pressure Sensitive	Yes Yes Yes
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

	Standard	Result
<b>Size</b>	EN ISO 24342	See page 116
<b>Thickness</b>	EN ISO 24346	4.5 mm
<b>Locking system<sup>1</sup></b>		2G™ angling installation system
<b>Wear layer</b>	EN ISO 24340	0.3 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial Residential	10 years Lifetime Warranty
<b>Bevelled edge</b>		None
<b>Mass per unit area</b>	EN ISO 23997	7600 g/m <sup>2</sup>
<b>Standards</b>	EN 16511	Pass (Multilayer modular floorcovering panels)
<b>Classification</b>	ISO 10874 - Commercial ISO 10874 - Domestic	31: Commercial moderate 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN 438-2	Pass (Grade 5)
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 6)
<b>Abrasion resistance</b>	EN 13329 Annex E	Pass (> 1200 cycles)
<b>Furniture chair leg</b>	EN 424	Pass (no visible damage)
<b>Dimensional stability</b>	EN 434 / EN ISO 23999	Pass (≤ 0.25%)
<b>Swelling</b>	ISO 24336	Pass (1.7%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 19 dB
<b>Indentation - residual</b>	ISO 24343-1	Pass (≤ 0.1 mm)
<b>Impact resistance</b>	EN 13329 Annex F	Pass (> 1800 mm)
<b>Castor chair continuous use</b>	EN 425 / EN ISO 4918	Pass (25,000 cycles)
<b>Thermal resistance</b>	ISO 8302	0.0184 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>3</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 156 for details
<b>Adhesive</b>	None required; please install according to our installation instructions.	
<b>Environmental</b>	Indoor Air Comfort	Gold certification Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> Subject to terms. Please see our website.

<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for Knight Tile.

# KARNDDEAN LOOSELAY WOOD


With enhanced acoustic properties and excellent environmental credentials, our Karndean LooseLay wood and Longboard ranges can be laid over most existing hard floors, and in many cases, without the need for adhesive.



Karndean LooseLay: Heritage Oak **LLP102**



Karndean LooseLay: Providence **LLP108**

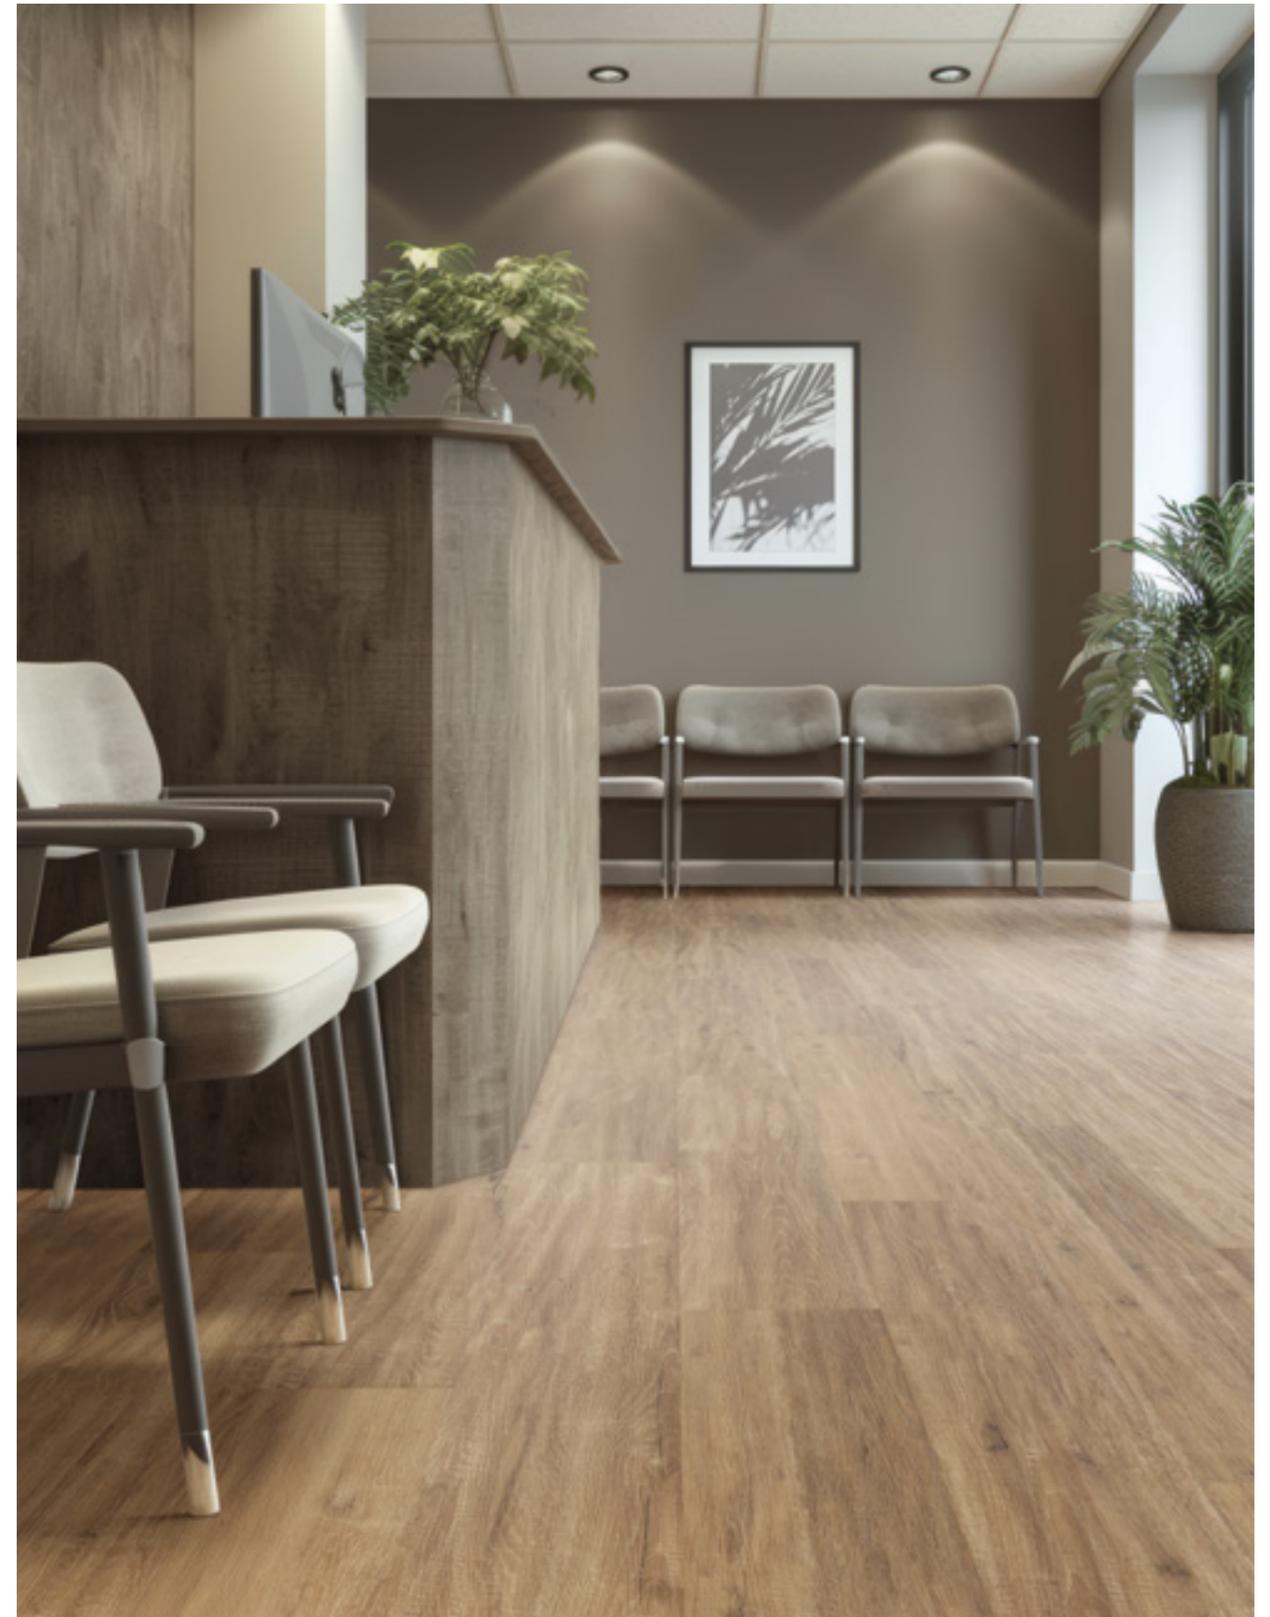

Karndean LooseLay: Neutral Oak **LLP307**

# AT A GLANCE

1500.0mm x 250.0mm (59.06" x 9.84")



Twilight Oak **LLP301**



Neutral Oak **LLP307**



Pearl Oak **LLP306**



French Grey Oak **LLP308**



Lemon Spotted Gum **LLP317**



Champagne Oak **LLP310**



Character Walnut **LLP315**

1050.0mm x 250.0mm (41.34" x 9.84")



Country Oak **LLP92**



Heritage Oak **LLP102**



Hartford **LLP112**



Ashland **LLP95**



Vintage Timber **LLP105**



Cambridge **LLP113**



Hudson **LLP99**



Antique Timber **LLP106**



Providence **LLP108**

	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	4.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		No
<b>Mass</b>	EN ISO 23997	7470 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>f1</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 7)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.10%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 13 dB
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0245 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 149 for details
<b>Adhesive</b>	Please refer to our installation instructions	
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>	Suitable	
<b>Phthalate free</b>	Yes	

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for LooseLay.

# KARNDEAN LOOSELAY STONE

Available in a large-format rectangular tile, Karndean LooseLay stone is easy to install and features our K-Wave® friction grip backing designed to hold products in place without the need for clicking or locking. It also boasts enhanced acoustic properties and is 100% recyclable. Each tile can be lifted individually making it perfect for spaces where access is required for underfloor services.

Two of our LooseLay stones, Quebec and Colorado, are also available in the extra-large format of 1000mm x 1000mm, and can be used to create an authentic poured concrete look.




Karndean LooseLay: Quebec **LG-LLT219**



Karndean LooseLay: Quebec **LG-LLT219**

# AT A GLANCE

500.0mm x 610.0mm (19.69" x 24.02")

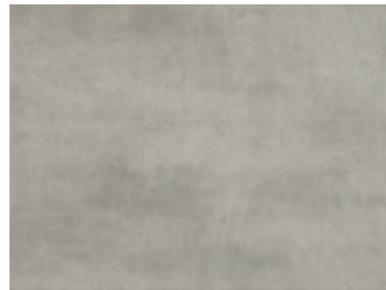

Ulah LLT216



Colorado LLT201



Madison LLT203




Quebec LLT219



Indiana LLT202



Arizona LLT200

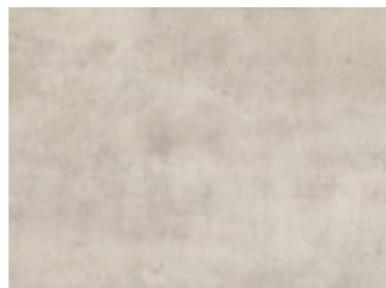

Seattle LLT214

1000mm x 1000mm (39.3" x 39.3")



Colorado LG-LLT201



Quebec LG-LLT219

	Standard	Result
<b>Size</b>	EN ISO 24342	See page opposite
<b>Thickness</b>	EN ISO 24346	4.5 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Light industrial Commercial Residential	15 years 15 years Lifetime Warranty
<b>Bevelled edge</b>		No
<b>Mass</b>	EN ISO 23997	7470 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 10582	Pass
<b>Classification</b>	EN ISO 10874 - Light industrial EN ISO 10874 - Commercial EN ISO 10874 - Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s1
<b>Staining resistance</b>	EN ISO 26987	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥ 7)
<b>Abrasion resistance</b>	EN ISO 10582	Type 1
<b>Flexibility</b>	EN ISO 24344	Pass
<b>Dimensional stability</b>	EN ISO 23999	Pass (≤ 0.10%)
<b>Acoustic impact noise reduction</b>	EN ISO 717-2 / EN ISO 140-8	ΔL <sub>w</sub> = 13 dB
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass
<b>Thermal resistance</b>	ISO 8302	0.0245 m <sup>2</sup> K/W Suitable for underfloor heating. Max 27°C
<b>Slip resistance<sup>2</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light reflectance value (LRV)</b>	BS 8493:2008+A1:2010	See page 156 for details
<b>Adhesive</b>	Please refer to our installation instructions	
<b>Environmental</b>	Indoor Air Comfort	Gold certification; Compliant low emitting VOC emissions.
	Floorscore SCS-EC10.3-2014 v4.0	Indoor air quality certified; Compliant low emitting VOC emissions.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF/ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Conformant product
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standard
<b>Recycling</b>	Suitable	
<b>Phthalate free</b>	Yes	

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.



Scan the QR code to see full technical specification for LooseLay.

# KORLOK REGENT WOOD

Discover rigid core technology which embodies the opulence of wood, with all the benefits of Luxury Vinyl Tile. Taking inspiration from the regal grandeur of royal palaces, the Korlok Regent collection offers an exquisite selection of timeless floors in large plank, multi-chevron plank, large chevron, and herringbone laying patterns. With 6 designs and 4 laying patterns all in cutting-edge rigid core format, achieving effortless luxury has never been so simple.



Korlok Regent: Stanmore Oak **RKP9001**



Korlok Regent: Greenwich Oak **RKP9002**



Exquisitely Embossed: To ensure each plank is inherently unique and thereby accentuating the natural aesthetics of the wood, our Korlok Regent designs have been finished with a highly realistic emboss.



Korlok Regent: Richmond Oak **CL-RKP9006**

# AT A GLANCE

Rigid core:  
Large plank  
1510.0mm x 220.0mm (59.45" x 8.66")



Stanmore Oak **RKP9001**



Greenwich Oak **RKP9002**



Primrose Oak **RKP9003**



Kensington Oak **RKP9004**



Victoria Oak **RKP9005**



Richmond Oak **RKP9006**

Rigid core:  
Large chevron  
1074.9mm x 214.9mm (42.32" x 8.46")



Stanmore Oak **CL-RKP9001**



Greenwich Oak **CL-RKP9002**



Primrose Oak **CL-RKP9003**



Kensington Oak **CL-RKP9004**



Victoria Oak **CL-RKP9005**



Richmond Oak **CL-RKP9006**

Rigid core:  
Chevron  
938.5mm x 305.1mm (36.95" x 12.01")



Stanmore Oak **CP-RKP9001**



Greenwich Oak **CP-RKP9002**



Primrose Oak **CP-RKP9003**



Kensington Oak **CP-RKP9004**



Victoria Oak **CP-RKP9005**



Richmond Oak **CP-RKP9006**

Rigid core:  
Herringbone  
720.1mm x 119.9mm (28.35" x 4.72")



Stanmore Oak **SM-RKP9001**




Greenwich Oak **SM-RKP9002**



Primrose Oak **SM-RKP9003**



Kensington Oak **SM-RKP9004**



Victoria Oak **SM-RKP9005**



Richmond Oak **SM-RKP9006**





	Standard	Result
<b>Size</b>	EN ISO 24342	See page 130
<b>Thickness</b>	EN ISO 24346	8.0 mm
<b>Wear layer</b>	EN ISO 24340	0.55 mm
<b>Locking mechanism<sup>1</sup></b>		i4F drop-lock technologies <sup>1</sup>
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial Residential	15 years Lifetime Warranty
<b>Bevelled edge</b>		Micro
<b>Mass per unit area</b>	EN ISO 23997	8860 g/m <sup>2</sup>
<b>Standards</b>	EN ISO 20326	Pass
<b>Classification</b>	ISO 10874 - Commercial ISO 10874 - Domestic	33: Commercial heavy 23: Domestic heavy
<b>Reaction to fire</b>	EN 13501-1	B <sub>fl</sub> -s <sub>1</sub>
<b>Staining resistance</b>	EN ISO 26987 / EN 423	Excellent
<b>Light fastness</b>	EN ISO 105-B02	Pass (≥6)
<b>Locking strength</b>	EN ISO 20326 Annex D	Pass (≥ 2.0 kN/m)
<b>Furniture chair leg</b>	EN ISO 16581	Pass (no visible damage)
<b>Acoustic impact noise reduction</b>	EN ISO 10140-1:2016	ΔL <sub>w</sub> = 17 dB
<b>Indentation - residual</b>	EN ISO 24343-1	Pass (≤ 0.1 mm)
<b>Castor chair continuous use</b>	EN ISO 4918	Pass (25,000 cycles)
<b>Thermal resistance</b>	EN 12664	0.074 m <sup>2</sup> K/W Suitable for underfloor heating Max 27°C
<b>Slip resistance<sup>3</sup></b>	EN 13893 EN 16165 Annex B/DIN 51130	DS R10
<b>Light Reflectance Value (LRV)</b>	BS 8493:2008+A1:2010	See page 151 for details
<b>Adhesive</b>		None required. Please install according to our installation guidelines
<b>Environmental</b>	Indoor Air Comfort  ISO 14001 / ISO 9001	Gold certification; Compliant low emitting VOC emissions  Manufactured to quality and environment management systems standard
<b>Recycling</b>		Suitable
<b>Phthalate free</b>		Yes

<sup>1</sup> These products utilise proprietary 3L Triplelock® and i4F Technology www.patents-i4f.com

<sup>2</sup> Subject to terms. Please see our website.

<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.




Scan the QR code to see full technical specification for Korlok Regent.

We've worked hard to produce a comprehensive portfolio of resources both online and offline. From downloadable files from our Technical Hub and inspiration from our case studies, to our full digital tool suite including our interactive visualiser, Floorstyle and BIM files. We're here to help when selecting the right floor for your project.

KARNDEAN FLOORS

# DIGITAL TOOL SUITE

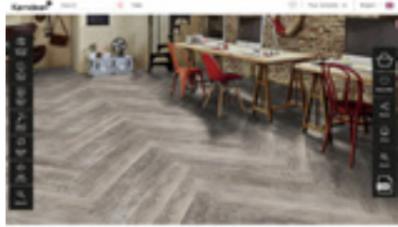

## Floorstyle designer tool

Our interactive room viewer, Floorstyle, lets you view our wide range of floors in typical commercial settings.

With improved usability, more sector specific settings, optional colour schemes and side-by-side comparison, you can discover our stylish and highly practical flooring in a truly visual manner.



## bimstore



## BIMstore

Specifiers can now access our complete portfolio of wood, stone and abstract designs as BIM components. With many advantages over previous project management tools, BIM allows specifiers to include both 3D colour models and technical details in one place, enabling clients to visualise what the end product will look like and other project team members to easily access the technical specifications they require.

[BIMstore.com](http://BIMstore.com)

## MattoBoard



## Mattoboard

We have now partnered with Mattoboard, a virtual 3D moodboarding tool which allows you to waste less and design more. Discover Karndean VSamples® alongside thousands of other products to help pioneer a sustainable future for interior design.

[mattoboard.com](http://mattoboard.com)



## NBS Source PARTNER


## NBS Source

Karndean are partners with NBS, which means you can find our products on NBS Source.

NBS Source is a free-to-use construction product platform that allows you to quickly and easily find, select and specify our products. Boasting enhanced product data in NBS standardised specification format and a range of content, from case studies to third party certificates; NBS Source gives you the detailed information you need to make informed product decisions.

[source.thenbs.com](http://source.thenbs.com)

To ensure you have everything you need from Karndean for your projects, visit [karndeancommercial.com](http://karndeancommercial.com) where you can access our Floorstyle designer tool, Technical Hub and Interactive Tour.

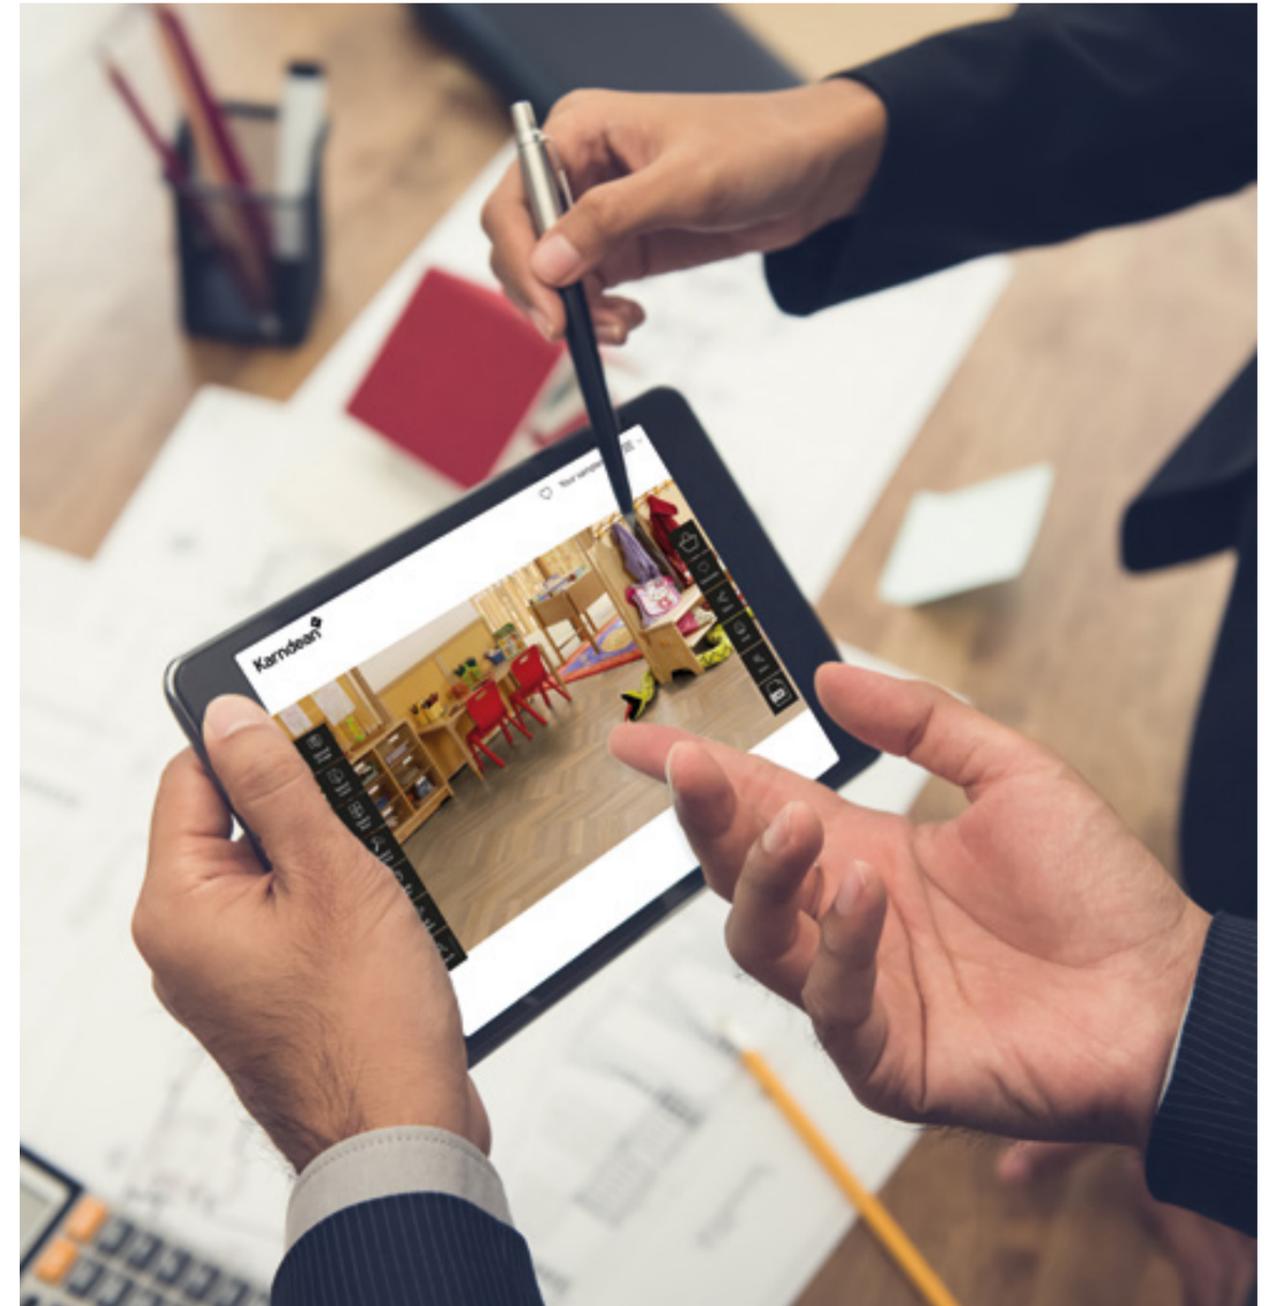

# SHOWROOMS

You can explore our portfolio of designs in person at the following locations:



## Karndean Commercial

Located in the heart of London's vibrant design district, the historic Georgian property has been designed to inspire the design community and highlight the endless possibilities of flooring.

The showroom features a beautiful selection of bespoke floors that demonstrate how Karndean flooring can meet both aesthetic requirements and demanding technical specifications, whilst also offering chip samples to take away.

Contact us at [clerkenwellshowroom@karndean.co.uk](mailto:clerkenwellshowroom@karndean.co.uk) to book an appointment.

## London Showroom

20 Clerkenwell Green, Clerkenwell  
London, England, EC1R 0DP



## Karndean Designflooring

In our showroom, you will find Karndean's full collection of wood, stone and abstract designs. As well as seeing the full range of Karndean Designflooring, you can book an appointment with our trained advisors, use our design tables to try out your ideas and take away full sized samples with you. Whatever the project and the intricacy of the detail demanded, we can help.

Contact us at [designshowroom@karndean.co.uk](mailto:designshowroom@karndean.co.uk) to book an appointment.

## Evesham Showroom

Crab Apple Way, Vale Park, Evesham,  
Worcestershire, England WR11 1GP



## Material Source Studio

We have partnered with Material Source Studio to be part of a space that brings architects and designers the very best materials and furniture brands for commercial design. Their studios are a place for inspiration and collaboration, with a full calendar of seminars and events alongside the showroom space.

[materialsource.co.uk](http://materialsource.co.uk)

## Manchester Studio

1 Federation Street, NOMA,  
Manchester, England, M4 4BF

## Glasgow Studio

180 West Saint George Street,  
Glasgow, Scotland, G2 2NR



20 Clerkenwell Green



View our comprehensive overview of the full Karndean Designflooring range, split into ranges and by product format. Quickly and easily compare colours, wear layers, sizes, LRVs and more, to help you select the right floor for your project.

# PERFORMANCE FORWARD

# ABSTRACT PRODUCTS BY RANGE

Heritage Collection	Code	Name	Thickness	Wear layer	Bevel	Products used	Size	Box quantity
	CLIF-01	Clifton	2.5mm	0.55mm	Standard	SP115 V20 - - -	228.6mm x 228.6mm	32 pieces / 1.672m <sup>2</sup>
	CLIF-02	Clifton	2.5mm	0.55mm	Standard	V19 V20 - - -	228.6mm x 228.6mm	32 pieces / 1.672m <sup>2</sup>
	CLIF-03	Clifton	2.5mm	0.55mm	Standard	V17 V20 - - -	228.6mm x 228.6mm	32 pieces / 1.672m <sup>2</sup>
	CLIF-04	Clifton	2.5mm	0.55mm	Standard	V12 V19 V20 SP115 -	228.6mm x 228.6mm	32 pieces / 1.672m <sup>2</sup>
	LANS-01	Lansdown	2.5mm	0.55mm	Standard	V20 SP115 - - -	228.6mm x 228.6mm	16 pieces / 1.486m <sup>2</sup>
	LANS-02	Lansdown	2.5mm	0.55mm	Standard	V20 V19 - - -	228.6mm x 228.6mm	16 pieces / 1.486m <sup>2</sup>
	LANS-03	Lansdown	2.5mm	0.55mm	Standard	V20 SP115 V12 - -	228.6mm x 228.6mm	16 pieces / 1.486m <sup>2</sup>
	LANS-04	Lansdown	2.5mm	0.55mm	Standard	V20 SP115 V13 - -	228.6mm x 228.6mm	16 pieces / 1.486m <sup>2</sup>
	MAYF-01	Mayfair	2.5mm	0.55mm	Standard	V18 V12 V19 V20 SP115	304.8mm x 304.8mm	16 pieces / 1.486m <sup>2</sup>
	MAYF-02	Mayfair	2.5mm	0.55mm	Standard	V15 V16 V12 V20 SP115	304.8mm x 304.8mm	16 pieces / 1.486m <sup>2</sup>
	MONT-01	Montpellier	2.5mm	0.55mm	Standard	V20 SP115 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-02	Montpellier	2.5mm	0.55mm	Standard	SP115 V20 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-03	Montpellier	2.5mm	0.55mm	Standard	V19 V20 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-04	Montpellier	2.5mm	0.55mm	Standard	V17 V20 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-05	Montpellier	2.5mm	0.55mm	Standard	V14 V20 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-06	Montpellier	2.5mm	0.55mm	Standard	V12 V20 - - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-07	Montpellier	2.5mm	0.55mm	Standard	V19 SP115 V20 - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>
	MONT-08	Montpellier	2.5mm	0.55mm	Standard	V18 SP115 V20 - -	152.4mm x 152.4mm & 53.8mm x 53.8mm	25 tiles & 25 key squares / 1.161m <sup>2</sup>

See individual products for slip resistance and LRV details

Kaleidoscope	Code	Name	Thickness	Wear layer	Bevel	Products used	Size	Box quantity
	KAL01	Pyramid	3.0mm	0.55mm	No	VGW80T VGW83T VGW89T -	150.0 mm face	72 pieces / 2.810m <sup>2</sup>
	KAL02	Cubix	2.0mm	0.55mm	No	ST8 ST13 ST14 -	150.0 mm face	150 pieces / 2.920m <sup>2</sup>
	KAL03	Cubix	3.0mm	0.55mm	No	LM06 LMI2 LMI6 -	150.0 mm face	126 pieces / 2.460m <sup>2</sup>
	KAL04	Pennon	3.0mm	0.55mm	No	LM09 LMI2 LMI6 -	150.0 mm face	36 pieces / 2.100m <sup>2</sup>
	KAL05	Half Pennon	3.0mm	0.55mm	No	VGW80T VGW83T - -	150.0 mm face	72 pieces / 2.100m <sup>2</sup>
	KAL06	Apex	2.5mm	0.55mm	No	WP418 - - -	150.0 mm face	36 pieces / 2.800m <sup>2</sup>
	KAL07	Apex	2.0mm	0.55mm	No	KP95 - - -	150.0 mm face	36 pieces / 2.800m <sup>2</sup>
	KAL08	Hexa	3.0mm	0.55mm	No	LM12 - - -	150.0 mm face	36 pieces / 2.100m <sup>2</sup>
	KAL09	Hexa	2.0mm	0.55mm	No	ST8 ST13 - -	150.0 mm face	36 pieces / 2.100m <sup>2</sup>
	KAL10	Tripoint	2.0mm	0.55mm	No	KPI03 KPI04 KPI05 -	150.0 mm face	72 pieces / 2.970m <sup>2</sup>
	KAL11	Woven Stone	2.5mm	0.55mm	No	SP111 SP211 SP213 -	304.8mm x 304.8mm tile	32 pieces / 2.510m <sup>2</sup>
	KAL12	Woven Wood	2.5mm	0.55mm	No	WP311 WP318 - -	304.8mm x 304.8mm tile	32 pieces / 2.510m <sup>2</sup>
	KAL13	Cubix	2.0mm	0.55mm	No	KP97 KPI03 KPI05 -	150.0 mm face	150 pieces / 2.920m <sup>2</sup>
	KAL14	Apex	3.0mm	0.55mm	No	RP97 RP98 RP99 -	150.0 mm face	36 pieces / 2.800m <sup>2</sup>

See individual products for slip resistance and LRV details

Kaleidoscope	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SP219	Casablanca	2.5mm	0.55mm	Micro	R10	46	457.0 mm x 610.0 mm	12 tiles / 3.345m <sup>2</sup>
	SP220	Marrakesh	2.5mm	0.55mm	Micro	R10	46	457.0 mm x 610.0 mm	12 tiles / 3.345m <sup>2</sup>

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SP119	Dolce	2.5mm	0.55mm	Micro	R10	11	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP120	Pieta	2.5mm	0.55mm	Micro	R10	34	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP121	Dalmata	2.5mm	0.55mm	Micro	R10	64	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP122	Salute Bianco	2.5mm	0.55mm	Micro	R10	67	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP719	Burnt Sienna	2.5mm	0.55mm	Micro	R10	12	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP720	Indigo	2.5mm	0.55mm	Micro	R10	12	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP721	Amber	2.5mm	0.55mm	Micro	R10	23	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP722	Zinc	2.5mm	0.55mm	Micro	R10	43	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP723	Zinc	2.5mm	0.55mm	Micro	R10	43	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP724	Chalk Grey	2.5mm	0.55mm	Micro	R10	34	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP725	Chalk Grey	2.5mm	0.55mm	Micro	R10	34	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP726	Yellow Ochre	2.5mm	0.55mm	Micro	R10	29	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP727	Black Iron	2.5mm	0.55mm	Micro	R10	11	152.4mm x 914.4mm	24 tiles / 3.345m <sup>2</sup>
	SP728	Black Iron	2.5mm	0.55mm	Micro	R10	11	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP729	San Marco	2.5mm	0.55mm	Micro	R10	47	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP730	Leoncini	2.5mm	0.55mm	Micro	R10	36	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP731	Stratus	2.5mm	0.55mm	Micro	R10	53	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP732	Umbra	2.5mm	0.55mm	Micro	R10	13	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP734	Contarini	2.5mm	0.55mm	Micro	R10	29	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP735	Tizina	2.5mm	0.55mm	Micro	R10	26	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP736	Interseco	2.5mm	0.55mm	Micro	R10	38	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP737	Statera	2.5mm	0.55mm	Micro	R10	9	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP738	Industria	2.5mm	0.55mm	Micro	R10	30	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	SP739	Concreto	2.5mm	0.55mm	Micro	R10	27	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>

Solid Colours	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	V11	Baby Blue	2.5mm	0.55mm	No	R10	41	Sizes and box quantity dependent on customer requirements	
	V12	Azure	2.5mm	0.55mm	No	R10	21		
	V13	Laurel	2.5mm	0.55mm	No	R10	24		
	V14	Blush	2.5mm	0.55mm	No	R10	52		
	V15	Gold	2.5mm	0.55mm	No	R10	36		
	V16	Crimson	2.5mm	0.55mm	No	R10	13		
	V17	Taupe	2.5mm	0.55mm	No	R10	29		
	V18	Terracotta	2.5mm	0.55mm	No	R10	12		
	V19	Dove Grey	2.5mm	0.55mm	No	R10	24		
	V20	Lace	2.5mm	0.55mm	No	R10	71		

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	AP01	Blond Oak	3.0mm	0.7mm	Standard	R9	27	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP02	Auburn Oak	3.0mm	0.7mm	Standard	R10	14	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP03	Black Oak	3.0mm	0.7mm	Standard	R10	6	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP05	Spanish Cherry	3.0mm	0.7mm	Standard	R9	9	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP06	Morning Oak	3.0mm	0.7mm	Standard	R10	16	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP07	Storm Oak	3.0mm	0.7mm	Standard	R10	27	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	AP08	Salon Oak	3.0mm	0.7mm	Standard	R9	26	228.6mm x 76.2mm	192 planks / 3.345m <sup>2</sup>
	EW02	Hickory Peppercorn	3.0mm	0.7mm	Standard	R10	9	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	EW03	Hickory Nutmeg	3.0mm	0.7mm	Standard	R10	12	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	EW21	Reclaimed Chestnut	3.0mm	0.7mm	Standard	R11	15	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	HC01	Dawn Oak	3.0mm	0.7mm	Standard	R10	14	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	HC02	Morning Oak	3.0mm	0.7mm	Standard	R10	16	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	HC06	Midnight Oak	3.0mm	0.7mm	Standard	R10	6	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	RL01	Spring Oak	3.0mm	0.7mm	Standard	R9	27	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL02	Summer Oak	3.0mm	0.7mm	Standard	R9	20	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL05	Spanish Cherry	3.0mm	0.7mm	Standard	R9	9	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL12	Storm Oak	3.0mm	0.7mm	Standard	R9	27	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL13	Salon Oak	3.0mm	0.7mm	Standard	R9	26	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL20	Prairie Oak	3.0mm	0.7mm	Standard	R11	29	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL21	Glacier Oak	3.0mm	0.7mm	Standard	R11	41	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL22	Mountain Oak	3.0mm	0.7mm	Standard	R11	41	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL23	Savannah Oak	3.0mm	0.7mm	Standard	R11	41	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL24	Dune Oak	3.0mm	0.7mm	Standard	R9	29	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL25	Canyon Oak	3.0mm	0.7mm	Standard	R9	18	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL26	Basque Oak	3.0mm	0.7mm	Standard	R9	34	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL27	Bellota Oak	3.0mm	0.7mm	Standard	R9	21	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL28	Serrano Oak	3.0mm	0.7mm	Standard	R9	12	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL29	Clay Artisan Oak	3.0mm	0.7mm	Standard	R10	42	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL30	Dove Artisan Oak	3.0mm	0.7mm	Standard	R10	32	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL31	Golden Artisan Oak	3.0mm	0.7mm	Standard	R10	30	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL32	Pale Artisan Oak	3.0mm	0.7mm	Standard	R10	44	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL33	Grey Artisan Oak	3.0mm	0.7mm	Standard	R10	25	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	RL34	Canvas Oak	3.0mm	0.7mm	Standard	R9	33	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL35	Damask Oak	3.0mm	0.7mm	Standard	R9	38	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL36	Merino Oak	3.0mm	0.7mm	Standard	R9	17	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL37	Tweed Oak	3.0mm	0.7mm	Standard	R9	19	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL38	Cotton Oak	3.0mm	0.7mm	Standard	R9	49	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	RL39	Castle Hill Ash	3.0mm	0.7mm	Standard	R9	25	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL40	Summerhouse Ash	3.0mm	0.7mm	Standard	R9	20	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL41	Canterbury Ash	3.0mm	0.7mm	Standard	R9	31	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL42	Totford Ash	3.0mm	0.7mm	Standard	R9	29	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL46	Limed Silk Oak	3.0mm	0.7mm	Standard	R9	21	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL47	Limed Linen Oak	3.0mm	0.7mm	Standard	R9	27	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RL48	Natural Oak	3.0mm	0.7mm	Standard	R9	25	1219.2mm x 114.3mm	24 planks / 3.345m <sup>2</sup>
	RPL-EW21	Reclaimed Chestnut (Random Plank)	3.0mm	0.7mm	Standard	R11	15	114.3mm, 152.4mm, and 228.6mm	27 planks / 3.902m <sup>2</sup>
	SBW-HC01	Dawn Oak	3.0mm	0.7mm	Standard	R10	14	114.3mm x 114.3mm / 304.8mm x 76.2mm	192 planks / 3.484m <sup>2</sup>
	SBW-RL01	Spring Oak	3.0mm	0.7mm	Standard	R9	27	114.3mm x 114.3mm / 304.8mm x 76.2mm	192 planks / 3.484m <sup>2</sup>
	SBW-RL12	Storm Oak	3.0mm	0.7mm	Standard	R9	27	114.3mm x 114.3mm / 304.8mm x 76.2mm	192 planks / 3.484m <sup>2</sup>

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SM-RL20	Prairie Oak	3.0mm	0.7mm	Standard	R11	29	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL21	Glacier Oak	3.0mm	0.7mm	Standard	R11	41	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL22	Mountain Oak	3.0mm	0.7mm	Standard	R11	41	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL23	Savannah Oak	3.0mm	0.7mm	Standard	R11	41	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL24	Dune Oak	3.0mm	0.7mm	Standard	R9	29	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL26	Basque Oak	3.0mm	0.7mm	Standard	R9	34	711.2mm x 114.3mm	40 planks / 3.252m <sup>2</sup>
	SM-RL27	Bellota Oak	3.0mm	0.7mm	Standard	R9	21	711.2mm x 114.3mm	40 planks / 3.252m <sup>2</sup>
	SM-RL28	Serrano Oak	3.0mm	0.7mm	Standard	R9	12	711.2mm x 114.3mm	40 planks / 3.252m <sup>2</sup>
	SM-RL29	Clay Artisan Oak	3.0mm	0.7mm	Standard	R10	42	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL30	Dove Artisan Oak	3.0mm	0.7mm	Standard	R10	32	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-RL31	Golden Artisan Oak	3.0mm	0.7mm	Standard	R10	30	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	VGW52T	Auckland Oak	3.0mm	0.55mm	Micro	R10	25	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW53T	Wellington Oak	3.0mm	0.55mm	Micro	R10	22	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW70T	Smoked Oak	3.0mm	0.55mm	Micro	R10	12	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW80T	White Washed Oak	3.0mm	0.55mm	Micro	R10	56	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW81T	Country Oak	3.0mm	0.55mm	Micro	R10	32	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW82T	Distressed Oak	3.0mm	0.55mm	Micro	R10	29	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW83T	Frosted Birch	3.0mm	0.55mm	Micro	R10	33	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW85T	French Oak	3.0mm	0.55mm	Micro	R10	35	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW86T	Classic Oak	3.0mm	0.55mm	Micro	R10	28	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW87T	Walnut	3.0mm	0.55mm	Micro	R10	14	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW89T	Ebony	3.0mm	0.55mm	Micro	R10	8	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW93T	Hessian Oak	3.0mm	0.55mm	Micro	R10	18	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW94T	Honey Oak	3.0mm	0.55mm	Micro	R10	28	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW107T	Blush Oak	3.0mm	0.55mm	Micro	R10	50	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW110T	Greige Oak	3.0mm	0.55mm	Micro	R10	33	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW111T	Light Distressed Oak	3.0mm	0.55mm	Micro	R10	43	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW112T	Misty Grey Oak	3.0mm	0.55mm	Micro	R10	28	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW113T	Cool Grey Oak	3.0mm	0.55mm	Micro	R10	34	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW115T	Natural Prime Oak	3.0mm	0.55mm	Micro	R10	35	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW120T	Grey Brushed Oak	3.0mm	0.55mm	Micro	R10	38	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW121T	Warm Brushed Oak	3.0mm	0.55mm	Micro	R10	30	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW122T	Golden Brushed Oak	3.0mm	0.55mm	Micro	R10	23	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW123T	Salvaged Barnwood	3.0mm	0.55mm	Micro	R10	12	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW124T	Shadow Oak	3.0mm	0.55mm	Micro	R10	26	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW126T	Neutral Brushed Oak	3.0mm	0.55mm	Micro	R10	39	1422.4mm x 228.6mm	15 planks / 3.252m <sup>2</sup>
	VGW136T	Blond Farmhouse Oak	3.0mm	0.55mm	Micro	R10	28	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW137T	Silver Farmhouse Oak	3.0mm	0.55mm	Micro	R10	44	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW138T	Smoked School Cedar	3.0mm	0.55mm	Micro	R10	16	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	VGW139T	Light Country Oak	3.0mm	0.55mm	Micro	R10	39	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	VGW142T	Natural School Cedar	3.0mm	0.55mm	Micro	R10	20	1219.2mm x 177.8mm	15 planks / 3.252m <sup>2</sup>
	SM-VGW120T	Grey Brushed Oak	3.0mm	0.55mm	Micro	R10	38	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW121T	Warm Brushed Oak	3.0mm	0.55mm	Micro	R10	30	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW122T	Golden Brushed Oak	3.0mm	0.55mm	Micro	R10	23	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW126T	Neutral Brushed Oak	3.0mm	0.55mm	Micro	R10	39	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW8105	Texas White Ash	3.0mm	0.55mm	Micro	R10	41	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW8110	Antique French Oak	3.0mm	0.55mm	Micro	R10	10	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	SM-VGW8116	Canadian Urban Oak	3.0mm	0.55mm	Micro	R10	28	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW8117	Canadian Nude Oak	3.0mm	0.55mm	Micro	R10	37	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	SM-VGW8237	Glenmore Oak	3.0mm	0.55mm	Micro	R10	22	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	SM-VGW8239	Texas Grey Ash	3.0mm	0.55mm	Micro	R10	33	711.2mm x 177.8mm	26 planks / 3.288m <sup>2</sup>
	SM-VGW8240	Croftmore Oak	3.0mm	0.55mm	Micro	R10	26	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	SM-VGW8241	Hayfield Oak	3.0mm	0.55mm	Micro	R10	30	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	SM-VGW8242	Aviemore Oak	3.0mm	0.55mm	Micro	R10	25	457.2mm x 114.3mm	64 planks / 3.345m <sup>2</sup>
	VGW8101	Baltic Washed Oak	3.0mm	0.55mm	Micro	R10	28	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8103	Warm Ash	3.0mm	0.55mm	Micro	R10	30	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8104	Washed Grey Ash	3.0mm	0.55mm	Micro	R10	24	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8105	Texas White Ash	3.0mm	0.55mm	Micro	R10	41	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8107	Smoked Butternut	3.0mm	0.55mm	Micro	R10	19	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8110	Antique French Oak	3.0mm	0.55mm	Micro	R10	10	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8111	Baltic Limed Oak	3.0mm	0.55mm	Micro	R10	25	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8112	Baltic Mistral Oak	3.0mm	0.55mm	Micro	R10	18	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8115	English Character Oak	3.0mm	0.55mm	Micro	R10	27	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8116	Canadian Urban Oak	3.0mm	0.55mm	Micro	R10	28	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8117	Canadian Nude Oak	3.0mm	0.55mm	Micro	R10	37	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8237	Glenmore Oak	3.0mm	0.55mm	Micro	R10	22	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8239	Texas Grey Ash	3.0mm	0.55mm	Micro	R10	33	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8240	Croftmore Oak	3.0mm	0.55mm	Micro	R10	26	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8241	Hayfield Oak	3.0mm	0.55mm	Micro	R10	30	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>
	VGW8242	Aviemore Oak	3.0mm	0.55mm	Micro	R10	25	1422.4mm x 228.6mm	10 planks / 3.252m <sup>2</sup>

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	REN113	Weathered Elm	2.5mm	0.55mm	Micro	R10	27	914.4mm x 101.6mm	36 planks / 3.345m <sup>2</sup>
	WP311	Grano	2.5mm	0.55mm	Micro	R10	35	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP313	Ignea	2.5mm	0.55mm	Micro	R10	16	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP313-SR	Ignea	2.5mm	0.55mm	Micro	R11	16	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP314	Cera	2.5mm	0.55mm	Micro	R10	32	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP318	Carbo	2.5mm	0.55mm	Micro	R10	6	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP318-SR	Carbo	2.5mm	0.55mm	Micro	R11	6	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	WP411	Niveus	2.5mm	0.55mm	Micro	R10	30	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP411-SR	Niveus	2.5mm	0.55mm	Micro	R11	30	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP412	Primo	2.5mm	0.55mm	Micro	R10	26	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP412-SR	Primo	2.5mm	0.55mm	Micro	R10	26	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP413	Magna	2.5mm	0.55mm	Micro	R10	26	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP413-SR	Magna	2.5mm	0.55mm	Micro	R11	26	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP414	Argen	2.5mm	0.55mm	Micro	R10	10	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP418	Pallida	2.5mm	0.55mm	Micro	R10	27	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP419	Fabrica	2.5mm	0.55mm	Micro	R10	44	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP422	Columba	2.5mm	0.55mm	Micro	R10	47	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP422-SR	Columba	2.5mm	0.55mm	Micro	R11	47	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP423	Avena	2.5mm	0.55mm	Micro	R10	33	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>
	WP423-SR	Avena	2.5mm	0.55mm	Micro	R11	33	1219.2mm x 228.6mm	12 planks / 3.345m <sup>2</sup>

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	CH-KP95	Rose Washed Oak	2.0mm	0.3mm	No	R10	32	1219.2mm x 228.6mm	12 Planks / 3.345m <sup>2</sup>
	CH-KP99	Lime Washed Oak	2.0mm	0.3mm	No	R10	36	1219.2mm x 228.6mm	12 Planks / 3.345m <sup>2</sup>
	CH-KP156	Grey Washed Oak	2.0mm	0.3mm	No	R10	26	1219.2mm x 228.6mm	12 Planks / 3.345m <sup>2</sup>
	KP94	Pale Limed Oak	2.0mm	0.3mm	No	R10	31	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP95	Rose Washed Oak	2.0mm	0.3mm	No	R10	32	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP96	Mid Limed Oak	2.0mm	0.3mm	No	R10	18	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP97	Classic Limed Oak	2.0mm	0.3mm	No	R10	19	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP98	Aged Oak	2.0mm	0.3mm	No	R10	9	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP99	Lime Washed Oak	2.0mm	0.3mm	No	R10	36	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP103	Mid Worn Oak	2.0mm	0.3mm	No	R10	13	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP104	Light Worn Oak	2.0mm	0.3mm	No	R10	25	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP105	White Painted Oak	2.0mm	0.3mm	No	R10	60	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP132	Washed Scandi Pine	2.0mm	0.3mm	No	R10	63	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP133	Natural Scandi Pine	2.0mm	0.3mm	No	R10	53	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP138	Grey Limed Oak	2.0mm	0.3mm	No	R10	33	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP144	Washed Character Oak	2.0mm	0.3mm	No	R10	28	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP145	Natural Character Oak	2.0mm	0.3mm	No	R10	32	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP146	Traditional Character Oak	2.0mm	0.3mm	No	R10	23	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP147	Coastline Oak	2.0mm	0.3mm	No	R10	36	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP148	Quayside Oak	2.0mm	0.3mm	No	R10	28	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP151	Natural Studio Oak	2.0mm	0.3mm	No	R10	30	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP152	Grey Studio Oak	2.0mm	0.3mm	No	R10	25	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP153	Nordic Limed Oak	2.0mm	0.3mm	No	R10	52	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP154	Dutch Limed Oak	2.0mm	0.3mm	No	R10	45	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP155	Honey Limed Oak	2.0mm	0.3mm	No	R10	23	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP159	Norfolk Acacia <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP160	Wells Acacia <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP161	Duxbury Acacia <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP163	Russet Character Oak <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP164	Nutmeg Limed Oak <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	KP165	Cocoa Limed Oak <sup>△</sup>	2.0mm	0.3mm	No	R10	*	914.4mm x 152.4mm	24 planks / 3.345m <sup>2</sup>
	SM-KP94	Pale Limed Oak	2.0mm	0.3mm	No	R10	31	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP95	Rose Washed Oak	2.0mm	0.3mm	No	R10	32	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP99	Lime Washed Oak	2.0mm	0.3mm	No	R10	36	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP138	Grey Limed Oak	2.0mm	0.3mm	No	R10	33	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP144	Washed Character Oak	2.0mm	0.3mm	No	R10	28	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP146	Traditional Character Oak	2.0mm	0.3mm	No	R10	23	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP154	Dutch Limed Oak	2.0mm	0.3mm	No	R10	45	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP155	Honey Limed Oak	2.0mm	0.3mm	No	R10	23	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP160	Wells Acacia <sup>△</sup>	2.0mm	0.3mm	No	R10	*	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP161	Duxbury Acacia <sup>△</sup>	2.0mm	0.3mm	No	R10	*	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP164	Nutmeg Limed Oak <sup>△</sup>	2.0mm	0.3mm	No	R10	*	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>
	SM-KP165	Cocoa Limed Oak <sup>△</sup>	2.0mm	0.3mm	No	R10	*	457.2mm x 76.2mm	96 planks / 3.345m <sup>2</sup>

<sup>△</sup> Available from August 2025



\*LRVs not available at time of print. Scan to see the full technical data for Knight Tile.

# WOOD PRODUCTS BY RANGE LOOSE LAY

Karndean Loose Lay	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	LLP92	Country Oak	4.5mm	0.55mm	No	R10	34	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP95	Ashland	4.5mm	0.55mm	No	R10	38	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP99	Hudson	4.5mm	0.55mm	No	R10	31	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP102	Heritage Oak	4.5mm	0.55mm	No	R10	14	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP105	Vintage Timber	4.5mm	0.55mm	No	R10	29	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP106	Antique Timber	4.5mm	0.55mm	No	R10	20	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP108	Providence	4.5mm	0.55mm	No	R10	31	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP112	Hartford	4.5mm	0.55mm	No	R10	16	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP113	Cambridge	4.5mm	0.55mm	No	R10	30	1050.0mm x 250.0mm	12 planks / 3.150m <sup>2</sup>
	LLP301	Twilight Oak	4.5mm	0.55mm	No	R10	20	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP306	Pearl Oak	4.5mm	0.55mm	No	R10	40	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP307	Neutral Oak	4.5mm	0.55mm	No	R10	21	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP308	French Grey Oak	4.5mm	0.55mm	No	R10	29	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP310	Champagne Oak	4.5mm	0.55mm	No	R10	31	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP315	Character Walnut	4.5mm	0.55mm	No	R10	14	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>
	LLP317	Lemon Spotted Gum	4.5mm	0.55mm	No	R10	26	1500.0mm x 250.0mm	8 planks / 3.000m <sup>2</sup>

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	RKP8101	Baltic Washed Oak	6.5mm	0.55mm	Micro	R10	28	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8103	Warm Ash	6.5mm	0.55mm	Micro	R10	30	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8104	Washed Grey Ash	6.5mm	0.55mm	Micro	R10	24	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8105	Texas White Ash	6.5mm	0.55mm	Micro	R10	41	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8107	Smoked Butternut	6.5mm	0.55mm	Micro	R10	19	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8110	Antique French Oak	6.5mm	0.55mm	Micro	R10	10	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8111	Baltic Limed Oak	6.5mm	0.55mm	Micro	R10	25	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8112	Baltic Mistral Oak	6.5mm	0.55mm	Micro	R10	18	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8115	English Character Oak	6.5mm	0.55mm	Micro	R10	27	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8116	Canadian Urban Oak	6.5mm	0.55mm	Micro	R10	28	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	RKP8117	Canadian Nude Oak	6.5mm	0.55mm	Micro	R10	37	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	SM-VGW120T-RKP	Grey Brushed Oak	6.5mm	0.55mm	Micro	R10	38	708.0mm x 177.0mm	24 planks / 3.008m <sup>2</sup>
	SM-VGW121T-RKP	Warm Brushed Oak	6.5mm	0.55mm	Micro	R10	30	708.0mm x 177.0mm	24 planks / 3.008m <sup>2</sup>
	SM-VGW122T-RKP	Golden Brushed Oak	6.5mm	0.55mm	Micro	R10	23	708.0mm x 177.0mm	24 planks / 3.008m <sup>2</sup>
	SM-VGW8105-RKP	Texas White Ash	6.5mm	0.55mm	Micro	R10	41	708.0mm x 177.0mm	24 planks / 3.008m <sup>2</sup>
	SM-VGW8116-RKP	Canadian Urban Oak	6.5mm	0.55mm	Micro	R10	28	708.0mm x 177.0mm	24 planks / 3.008m <sup>2</sup>
	VGW120T-RKP	Grey Brushed Oak	6.5mm	0.55mm	Micro	R10	38	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	VGW121T-RKP	Warm Brushed Oak	6.5mm	0.55mm	Micro	R10	30	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	VGW122T-RKP	Golden Brushed Oak	6.5mm	0.55mm	Micro	R10	23	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>
	VGW123T-RKP	Salvaged Barnwood	6.5mm	0.55mm	Micro	R10	12	1420.0mm x 225.0mm	10 planks / 3.195m <sup>2</sup>

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SCB-CH-KP95	Rose Washed Oak	4.5mm	0.3mm	No	R10	32	1220.0mm x 225.0mm	10 planks / 2.745m <sup>2</sup>
	SCB-CH-KP99	Lime Washed Oak	4.5mm	0.3mm	No	R10	36	1220.0mm x 225.0mm	10 planks / 2.745m <sup>2</sup>
	SCB-CH-KP156	Grey Washed Oak	4.5mm	0.3mm	No	R10	26	1220.0mm x 225.0mm	10 planks / 2.745m <sup>2</sup>
	SCB-KP94-6	Pale Limed Oak	4.5mm	0.3mm	No	R10	31	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP95-6	Rose Washed Oak	4.5mm	0.3mm	No	R10	32	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP99-6	Lime Washed Oak	4.5mm	0.3mm	No	R10	36	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP138-6	Grey Limed Oak	4.5mm	0.3mm	No	R10	33	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP144-6	Washed Character Oak	4.5mm	0.3mm	No	R10	28	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP146-6	Traditional Character Oak	4.5mm	0.3mm	No	R10	23	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>
	SCB-KP154-6	Dutch Limed Oak	4.5mm	0.3mm	No	R10	45	914.4mm x 150.0mm	20 planks / 2.743m <sup>2</sup>

Kortok Regent	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	CL-RKP9001	Stanmore Oak	8.0mm	0.55mm	Micro	R10	42	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CL-RKP9002	Greenwich Oak	8.0mm	0.55mm	Micro	R10	37	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CL-RKP9003	Primrose Oak	8.0mm	0.55mm	Micro	R10	27	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CL-RKP9004	Kensington Oak	8.0mm	0.55mm	Micro	R10	27	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CL-RKP9005	Victoria Oak	8.0mm	0.55mm	Micro	R10	23	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CL-RKP9006	Richmond Oak	8.0mm	0.55mm	Micro	R10	13	1074.9mm x 214.9mm	8 planks / 1.848m <sup>2</sup>
	CP-RKP9001	Stanmore Oak	8.0mm	0.55mm	Micro	R10	42	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	CP-RKP9002	Greenwich Oak	8.0mm	0.55mm	Micro	R10	37	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	CP-RKP9003	Primrose Oak	8.0mm	0.55mm	Micro	R10	27	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	CP-RKP9004	Kensington Oak	8.0mm	0.55mm	Micro	R10	27	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	CP-RKP9005	Victoria Oak	8.0mm	0.55mm	Micro	R10	23	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	CP-RKP9006	Richmond Oak	8.0mm	0.55mm	Micro	R10	13	938.5mm x 305.1mm	6 planks / 1.719m <sup>2</sup>
	RKP9001	Stanmore Oak	8.0mm	0.55mm	Micro	R10	42	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	RKP9002	Greenwich Oak	8.0mm	0.55mm	Micro	R10	37	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	RKP9003	Primrose Oak	8.0mm	0.55mm	Micro	R10	27	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	RKP9004	Kensington Oak	8.0mm	0.55mm	Micro	R10	27	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	RKP9005	Victoria Oak	8.0mm	0.55mm	Micro	R10	23	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	RKP9006	Richmond Oak	8.0mm	0.55mm	Micro	R10	13	1510.0mm x 220.0mm	6 planks / 1.994m <sup>2</sup>
	SM-RKP9001	Stanmore Oak	8.0mm	0.55mm	Micro	R10	42	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>
	SM-RKP9002	Greenwich Oak	8.0mm	0.55mm	Micro	R10	37	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>
	SM-RKP9003	Primrose Oak	8.0mm	0.55mm	Micro	R10	27	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>
	SM-RKP9004	Kensington Oak	8.0mm	0.55mm	Micro	R10	27	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>
	SM-RKP9005	Victoria Oak	8.0mm	0.55mm	Micro	R10	23	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>
	SM-RKP9006	Richmond Oak	8.0mm	0.55mm	Micro	R10	13	720.1mm x 119.9mm	24 planks / 2.073m <sup>2</sup>

# STONE PRODUCTS BY RANGE GLUEDOWN

Art Select	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	LM05	Melbourne Slate	3.0mm	0.7mm	Standard	R10	18	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM06	Canberra Slate	3.0mm	0.7mm	Standard	R10	10	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM22	Corris Slate	3.0mm	0.7mm	Standard	R10	17	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM30	Ionic Marble	3.0mm	0.7mm	Standard	R10	40	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	LM31	Corinthian Marble	3.0mm	0.7mm	Standard	R10	6	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	LM32	Doric Marble	3.0mm	0.7mm	Standard	R10	59	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	LM33	Calacatta d'Oro	3.0mm	0.7mm	Standard	R10	62	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM34	Black Onyx	3.0mm	0.7mm	Standard	R10	13	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM35	Pearl Onyx	3.0mm	0.7mm	Standard	R10	56	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM36	Rose Onyx	3.0mm	0.7mm	Standard	R10	57	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM37	Silk Travertino	3.0mm	0.7mm	Standard	R10	47	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM38	Champagne Travertino	3.0mm	0.7mm	Standard	R10	53	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM39	Caliza Classico	3.0mm	0.7mm	Standard	R10	41	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM40	Pavimento Crema	3.0mm	0.7mm	Standard	R10	45	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM41	Pavimento Grigio	3.0mm	0.7mm	Standard	R10	38	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM42	Pavimento Bianco	3.0mm	0.7mm	Standard	R10	45	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM43	Brezza Ceppo	3.0mm	0.7mm	Standard	R10	44	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM44	Sabbia Ceppo	3.0mm	0.7mm	Standard	R10	45	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM45	Naturale Ceppo	3.0mm	0.7mm	Standard	R10	31	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	LM46	Cambric Stone	3.0mm	0.7mm	Standard	R10	31	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM47	Brenner Quartzite	3.0mm	0.7mm	Standard	R10	44	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM48	Verona Quartzite	3.0mm	0.7mm	Standard	R10	15	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	LM49	Lago Quartzite	3.0mm	0.7mm	Standard	R10	10	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>



Art Select: Black Onyx **LM34**

Opus	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SM-SP216	Fumo	2.5mm	0.55mm	Micro	R10	23	457.2mm x 76.2mm	96 pieces / 3.345m <sup>2</sup>
	SM-SP217	Argento	2.5mm	0.55mm	Micro	R10	35	457.2mm x 76.2mm	96 pieces / 3.345m <sup>2</sup>
	SP111	Luna	2.5mm	0.55mm	Micro	R10	66	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP115	Nero	2.5mm	0.55mm	Micro	R10	8	457.2mm x 457.2mm	16 tiles / 3.345m <sup>2</sup>
	SP211	Mico	2.5mm	0.55mm	Micro	R10	45	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP212	Terra	2.5mm	0.55mm	Micro	R10	45	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP213	Urbus	2.5mm	0.55mm	Micro	R10	23	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP213-SR	Urbus	2.5mm	0.55mm	Micro	R11	23	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP216	Fumo	2.5mm	0.55mm	Micro	R10	23	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP216-SR	Fumo	2.5mm	0.55mm	Micro	R11	23	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP217	Argento	2.5mm	0.55mm	Micro	R10	35	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	SP217-SR	Argento	2.5mm	0.55mm	Micro	R11	35	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SM-VGT2413	Palazzo Marble	3.0mm	0.55mm	Micro	R10	67	177.8mm x 711.2mm	26 tiles / 3.288m <sup>2</sup>
	VGT2401	Frosted Stone	3.0mm	0.55mm	Micro	R10	51	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2402	Urban Grey	3.0mm	0.55mm	Micro	R10	22	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2403	Metro Grey	3.0mm	0.55mm	Micro	R10	29	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2405	Cotswold Stone	3.0mm	0.55mm	Micro	R10	40	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2406	Volcanic Black	3.0mm	0.55mm	Micro	R10	16	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2410	Pebble Grey	3.0mm	0.55mm	Micro	R10	22	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2413	Palazzo Marble	3.0mm	0.55mm	Micro	R10	67	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2416	Bronze Castello Marble	3.0mm	0.55mm	Micro	R10	21	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2417	Grey Castello Marble	3.0mm	0.55mm	Micro	R10	26	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2418	Dove Castello Marble	3.0mm	0.55mm	Micro	R10	37	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2419	Graphite Castello Marble	3.0mm	0.55mm	Micro	R10	15	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2420	Milanese Slate	3.0mm	0.55mm	Micro	R10	11	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2421	Tuscan Slate	3.0mm	0.55mm	Micro	R10	24	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2422	Roman Slate	3.0mm	0.55mm	Micro	R10	26	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT2423	Venetian Slate	3.0mm	0.55mm	Micro	R10	46	457.2mm x 609.6mm	12 tiles / 3.345m <sup>2</sup>
	VGT3018	Tortora Breccia Marble	3.0mm	0.55mm	Micro	R10	36	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	VGT3019	Grigio Breccia Marble	3.0mm	0.55mm	Micro	R10	30	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	VGT3020	Luna Breccia Marble	3.0mm	0.55mm	Micro	R10	42	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>
	VGT3021	Bianco Breccia Marble	3.0mm	0.55mm	Micro	R10	54	457.2mm x 914.4mm	8 tiles / 3.345m <sup>2</sup>

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	ST12	Bath Stone	2.0mm	0.3mm	No	R10	39	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST13	Portland Stone	2.0mm	0.3mm	No	R10	34	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST14	Cumbrian Stone	2.0mm	0.3mm	No	R10	18	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST15	Black Riven Slate	2.0mm	0.3mm	No	R10	11	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST16	Grey Riven Slate	2.0mm	0.3mm	No	R10	28	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST17	Honed Oyster Slate	2.0mm	0.3mm	No	R10	63	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST18	Ivory Riven Slate	2.0mm	0.3mm	No	R10	55	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST20	Honed Pebble Slate	2.0mm	0.3mm	No	R10	37	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST21	Dove Grey Concrete	2.0mm	0.3mm	No	R10	47	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST22	Smoked Concrete	2.0mm	0.3mm	No	R10	32	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST26	Frosted Marble	2.0mm	0.3mm	No	R10	68	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST29	Natural Stone	2.0mm	0.3mm	No	R10	46	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST31	River Marble <sup>△</sup>	2.0mm	0.3mm	No	R10	*	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST32	Lunar Limestone <sup>△</sup>	2.0mm	0.3mm	No	R10	*	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>
	ST33	Natural Limestone <sup>△</sup>	2.0mm	0.3mm	No	R10	*	304.8mm x 457.2mm	24 tiles / 3.345m <sup>2</sup>

<sup>△</sup> Available from August 2025



\*LRVs not available at time of print. Scan to see the full technical data for Knight Tile.

# STONE PRODUCTS BY RANGE LOOSE LAY

Karndean Loose Lay	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	LG-LLT201	Colorado	4.5mm	0.55mm	No	R10	32	1000.0mm x 1000.0mm	N/A (Pallets)
	LG-LLT219	Quebec	4.5mm	0.55mm	No	R10	40	1000.0mm x 1000.0mm	N/A (Pallets)
	LLT200	Arizona	4.5mm	0.55mm	No	R10	19	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT201	Colorado	4.5mm	0.55mm	No	R10	32	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT202	Indiana	4.5mm	0.55mm	No	R10	44	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT203	Madison	4.5mm	0.55mm	No	R10	8	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT214	Seattle	4.5mm	0.55mm	No	R10	47	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT216	Utah	4.5mm	0.55mm	No	R10	35	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>
	LLT219	Quebec	4.5mm	0.55mm	No	R10	40	500.0mm x 610.0mm	10 tiles / 3.050m <sup>2</sup>

# STONE PRODUCTS BY RANGE RIGID CORE

Van Gogh	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	RKT2401	Frosted Stone	6.5mm	0.55mm	Micro	R10	51	457.0mm x 600.0mm	10 tiles / 2.742m <sup>2</sup>
	RKT2402	Urban Grey	6.5mm	0.55mm	Micro	R10	22	457.0mm x 600.0mm	10 tiles / 2.742m <sup>2</sup>
	RKT2403	Metro Grey	6.5mm	0.55mm	Micro	R10	29	457.0mm x 600.0mm	10 tiles / 2.742m <sup>2</sup>
	RKT2405	Cotswold Stone	6.5mm	0.55mm	Micro	R10	40	457.0mm x 600.0mm	10 tiles / 2.742m <sup>2</sup>
	RKT2406	Volcanic Black	6.5mm	0.55mm	Micro	R10	16	457.0mm x 600.0mm	10 tiles / 2.742m <sup>2</sup>

Knight Tile	Code	Name	Thickness	Wear layer	Bevel	Slip Resistance DIN 51130	LRV	Size	Box quantity
	SCB-ST14-18	Cumbrian Stone	4.5mm	0.3mm	No	R10	18	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>
	SCB-ST16-18	Grey Riven Slate	4.5mm	0.3mm	No	R10	28	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>
	SCB-ST18-18	Ivory Riven Slate	4.5mm	0.3mm	No	R10	55	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>
	SCB-ST20-18	Honed Pebble Slate	4.5mm	0.3mm	No	R10	37	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>
	SCB-ST21-18	Dove Grey Concrete	4.5mm	0.3mm	No	R10	47	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>
	SCB-ST26-18	Frosted Marble	4.5mm	0.3mm	No	R10	68	304.8mm x 457.2mm	20 Tiles / 2.787m <sup>2</sup>



Design is an endless journey

# Karndean



t. 01386 820104 [www.karndean.com](http://www.karndean.com)

Karndean Designflooring, Crab Apple Way,  
Vale Park, Evesham, Worcestershire, WR11 1GP



**Karndean Designflooring - Commercial**

**Call:** 0044 (0)1386 820104

**Email:** [commercial@karndean.co.uk](mailto:commercial@karndean.co.uk)

**For ROI call:** 01 6569887

KD8695UK | COMMSBROCH6