



**Karndean**  
COMMERCIAL

**Karndean**

# LUXURY VINYL FLOORING

Beautifully Crafted for Commercial Spaces



## Better By Design

Our award-winning luxury vinyl flooring captures the natural beauty of wood and stone in extraordinary detail. Combining artistry, craftsmanship and cutting-edge technology, every wood and stone design is an original available exclusively from Karndean.

Inspired by wood and stone from around the world, the strict control we exercise in product development and manufacturing ensures you can count on Karndean for the most beautifully crafted luxury vinyl flooring.

**Award  
Winning**



**Knight Tile 2026**  
**Korlok Select 2026**  
Opus 2026  
**Art Select 2025**  
LooseLay 2024



**Art Select 2025 & 2024**  
**Opus 2024**



**Karndean**  
**COMMERCIAL**

# CONTENTS

Introduction	2
A Partner You Can Count On	3
Karndean Design Aesthetics	4
Karndean Evolve™	6
<b>Commercial Sectors</b>	
Healthcare	10
Senior Living	11
Education	12
Retail	13
Hospitality	14
Restaurants	15
Multi-family	16
Office	17
<b>Luxury Vinyl Designs and Collections</b>	
Karndean Luxury Vinyl	18
Installation Formats	20
Product Collections: Spec Comparison	22
Wood-Inspired Designs	24
Stone-Inspired Designs	30
Abstract-Inspired Designs	32
Art Select	34
Van Gogh	48
Opus	56
Knight Tile	70
Karndean LooseLay	78
Korlok Select	92
Korlok Reserve	104
<b>Design Solutions</b>	
Emblems and Logos	110
Solid Colors	111
Design and Grout Strips	112
Trims	114
Design Borders	115
Adhesives and Flooring Products	116
<b>Resources and Support</b>	
Online Tools and Resources	118
Customer Support and Samples	120



**Karndean**  
COMMERCIAL

## ALWAYS ONE STEP AHEAD

A family business founded in 1973, we've continually been at the forefront of luxury vinyl flooring innovation, offering the most beautifully realistic wood- and stone-inspired designs in a flooring product that meets the practical considerations of commercial installation and performance.

With over 50 years of experience, we're always one step ahead.





## A Partner You Can Count On

We're stocked up on stylish, durable luxury vinyl at our warehouses in Pittsburgh, Fort Worth and Las Vegas for faster fulfillment from coast to coast. If you need a big order filled fast, contact your Karndean sales representative, or give us a call at 888-266-4343.





# Karndean DESIGN AESTHETICS

## THE SYNTHESIS OF STYLE + MOOD



■ Corsini Marble LLT223



■ Pale Swiss Elm LLP373



■ Dune Oak RL24 | Calacatta d'Oro LM33 | Pavimento Bianco LM42

Create a feeling. Evoke a mood. Express a distinctive style.

The character, color and texture of our original flooring designs are carefully chosen to complement larger interior design aesthetics – holistic perspectives that shape the look, feel and function of an entire space.

Our design aesthetics are continually influenced by the world around us. Changing behaviors, attitudes and values are represented through design choices for colors, textures, shapes and forms.

Which design aesthetic matches your vision? Use it to choose a floor that makes the right impression. Learn more online: [karndeancommercial.com/aesthetics](http://karndeancommercial.com/aesthetics).

## SERENITY | CALM | RESTORATION

“Senti” means “to feel.” It’s an idea at the heart of creating peaceful spaces that foster meaningful connection. Spaces that embrace handcraftsmanship, in all its natural beauty and imperfect character, remind us of our shared humanity and nurture our emotional well-being.



## RELAXATION | FOCUS | REFUGE

Luma brings nature and technology into harmony. Biophilic principles engage the senses, while the illumination of digital devices – inspired by natural phenomena like marine bioluminescence or celestial auroras – offers enchanting new possibilities for light, color and multisensory stimulation.



## JOY | OPTIMISM | SELF-CARE

Inspired by all the things we do for fun, these delightful interior spaces feel much like the satisfying effect of a dopamine release. It’s coloring outside the lines with purpose, in equal measure playful and practical, achieving function in creative ways – but always centered on sparking joy.





# CREATING A BETTER TOMORROW

It's a new day.  
And we're creating  
a better tomorrow.

Reducing carbon emissions.  
Supply chain transparency.  
And an even stronger commitment  
to fair and inclusive workplaces.

This is how we make real change.

**This is how we Evolve.**



## Transparency and Trust

We're proud to be the first U.S. signatory of The Anti-Greenwash Charter, which provides strict guidelines for sustainability marketing, ensuring that claims about Karndeans products and operations are fair, accurate and substantiated.

## SUSTAINABILITY FOCUS AREAS



### Confront Climate Change

Reducing our carbon footprint through energy efficiency and use of renewable energy.



### Sustainable Resource Use

Conserving natural resources; using post-industrial and post-consumer recycled materials.



Sustainability is being integrated across our global operations and is a fundamental consideration in all major business decisions.



**Individual Health and Well-Being**

Ensuring the health and safety of those involved with manufacturing and use of our products.



**Inclusion and Diversity**

Nurturing an equitable, inclusive and diverse workplace culture through engagement and education.



**Supply Chain Transparency**

Third-party certifications for environmental and social responsibility, including fair treatment and safe conditions for workers.



**Employee Education**

Educating employees about the importance of sustainability, helping them understand what role they play and increasing the likelihood of achieving our goals



# 42% BY 2030

## GREENHOUSE GAS EMISSIONS REDUCTIONS

The Science Based Targets initiative (SBTi), an international corporate climate-action organization, has approved our targets for greenhouse gas emissions reductions, validating that our near-term targets are aligned with the reductions necessary to prevent global warming from reaching catastrophic levels.



**We are committed to reducing absolute Scope 1 and Scope 2 GHG emissions  
42% by 2030 from a 2022 base year.\***

Our approved targets meet SBTi's most ambitious designation by aligning with a 1.5° C climate trajectory, which refers to the goal of limiting global warming to 1.5° C above pre-industrial temperatures.

\*According to the U.S. Environmental Protection Agency, Scope 1 emissions are generated from sources owned or controlled by an organization; Scope 2 applies to indirect emissions from purchased energy.



"The climate crisis demands fundamental change in the way companies operate, and we are proud to step up and have our leadership independently recognized. Everyone has a responsibility to take meaningful action – and meeting the rigorous criteria for approval of our science-based targets affirms we are doing just that."

**Jamie Shaw,  
Karndean Group  
Sustainability Director**

■ River Marble ST31 | SCB-ST31-G

# CERTIFICATIONS AND STANDARDS

Sustainability includes protecting both the planet and its people. We meet third-party standards and have earned certifications that demonstrate our commitment to reducing our environmental impact while ensuring human health and safety.

## LEED projects

We are a member of the U.S. Green Building Council. Our products can earn LEED v4 points in two categories:

MR (Materials and Resources) - We have product-specific EPDs, which report objective third party-verified data about a product's environmental impact based on its life cycle.

EQ (Indoor Environmental Quality) - Products are FloorScore® certified.

## FloorScore®

Our flooring products are FloorScore® certified for post-installation indoor air quality, with independent testing proving them to be very low emitting in volatile organic compounds (VOCs). Our adhesives are either water-based or solvent-free with very low VOC emissions.

FloorScore® certification allows our products to be used for WELL v2 projects.

## NSF/ANSI 332

All products are certified to NSF/ANSI 332, the foremost U.S. standard by which to evaluate and verify sustainability of floor coverings across the entire product life cycle.

## ASSURE CERTIFIED™

Our rigid core products are ASSURE CERTIFIED™ by the Resilient Floor Covering Institute (RFCI) and SCS Global Services, ensuring the flooring was manufactured to the highest standards and meets all the requirements for indoor air quality, rigorous performance, and low heavy metals and ortho-phthalates content.

## ISO 14001

Our products are manufactured in purpose-built factories certified to the ISO 14001 environmental management standard, which provides a framework for measuring and reducing environmental impact, including facility water usage, pollution, waste and product packaging.

## California Prop 65

Our flooring products are in compliance with California Proposition 65, free from chemicals known to cause cancer, birth defects or other reproductive harm. Products are free from heavy metals, BPA, formaldehyde and unsafe phthalates.

## mindful MATERIALS

Our products are included in the mindful MATERIALS database, which provides environmental information for architects, designers and contractors.



# commercial sectors

## HEALTHCARE

Choose from countless stylish looks and colors to create vibrant modern spaces that inspire confidence and a sense of calm. Our durable luxury vinyl is hygienic, waterproof and easy to clean.



■ Toledo SP811 | Burnt Sienna SP719 | Indigo SP720 | Olive SP740

### Intuitive Spaces

Mix and match our flooring for zoning and wayfinding.

- Wood- and stone-inspired designs
- Abstract visuals
- Solid colors




■ Neutral Oak LLP307

Healthcare, education, hospitality, multi-family – our Luxury vinyl combines style, durability and performance for heavily trafficked environments.

# SENIOR LIVING

Create a superior resident experience and impress guests. Our stylish luxury vinyl delivers style, durability and performance for residences, community spaces and entrances.

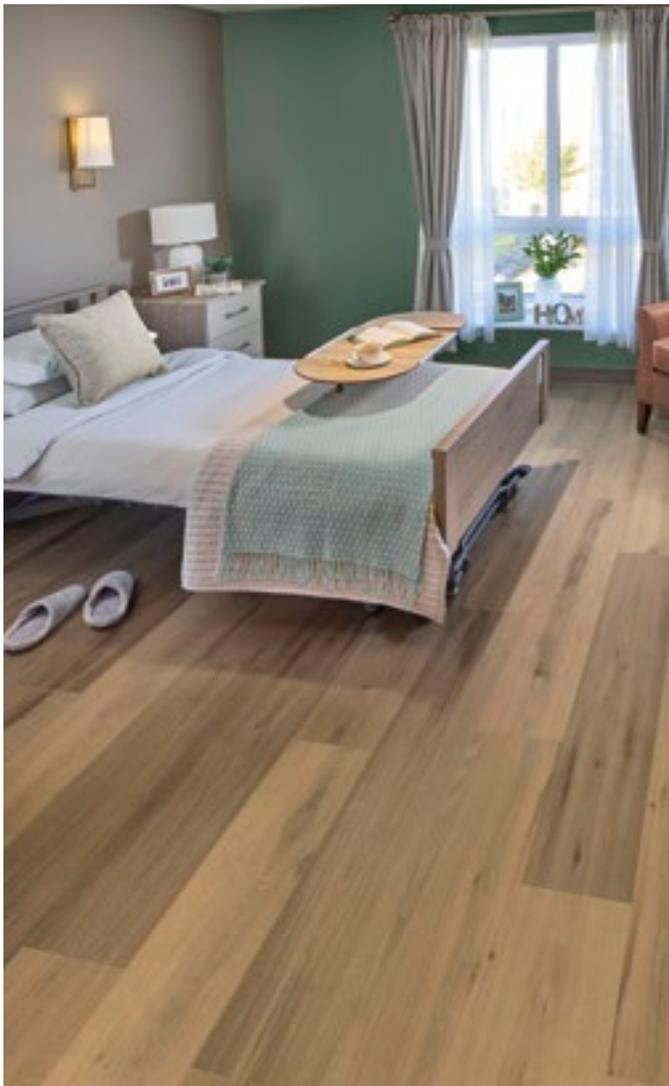

■ Vermeer Oak **WP427**



■ Indy Urban Elm **VGW148T | SCB148**

## Safer for Seniors

All of our flooring test results exceed the pass rating for ASTM D2047 dry-test method for slip resistance.

# EDUCATION

Durable, hygienic, and easy to clean and maintain – our luxury vinyl checks all the boxes for education spaces, from classrooms, dormitories and cafeterias to pre-K spaces.




■ Shorebird Ash **LLP360**

## Sustainable Building

Earn LEED v4 points for:

- Materials and Resources
- Indoor Environmental Quality

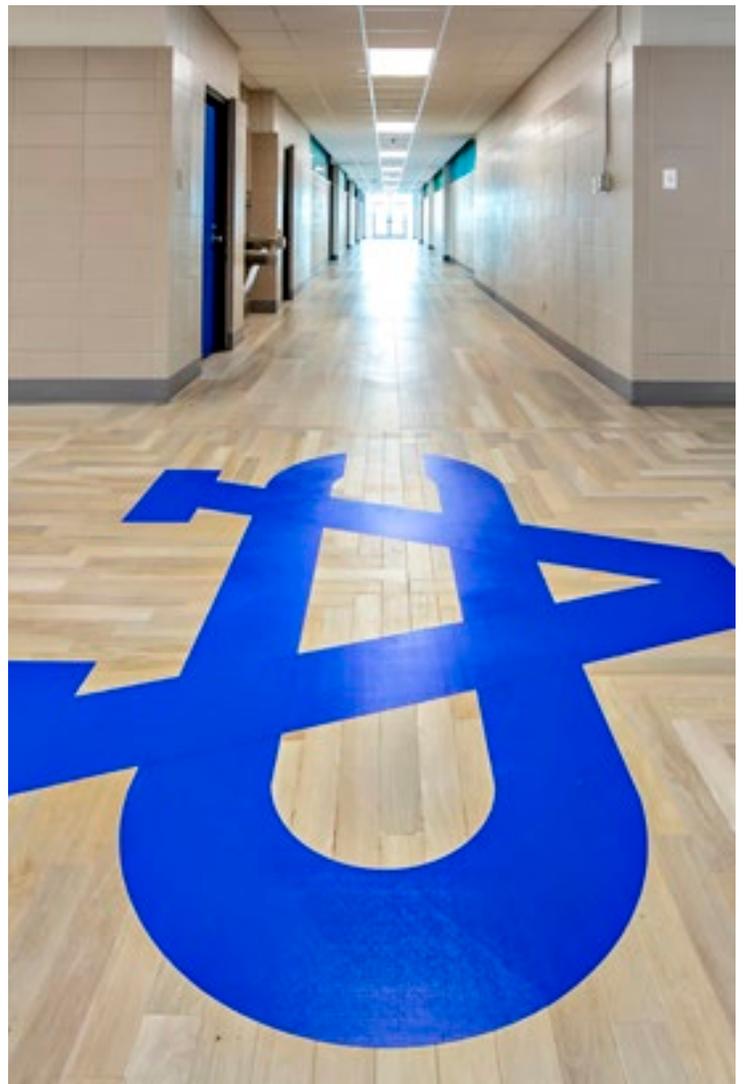

■ Glacier Oak **SM-RL21-28** | ■ Blue Custom **V7**

# RETAIL

Big-box retailers, grocery chains or small boutiques. Create appealing spaces for shoppers and employees with durable luxury vinyl flooring that's easy to clean and maintain – no need for waxing, sealing, harsh chemicals or other expensive, time-consuming maintenance.



■ Silver Farmhouse Oak **VGW137T** | **SCB137**

## Withstands Wear and Tear

Karndean delivers durability for heavily trafficked retail spaces.

- K-Guard+ surface protection
- Scratch- and scuff-resistant
- Wear layers up to 30 mil



■ Steen Oak **WP426**

# HOSPITALITY

Most hotels and resorts have distinct brand identities. Choose from hundreds of stylish wood- and stone-inspired designs, abstract concepts and solid colors for flooring installations that complement the brand aesthetic.



■ Pale Swiss Elm **LLP373**

## A Lasting Impression

Create an elevated guest experience, using our beautifully crafted luxury vinyl as part of a high-end aesthetic.



■ Tranquilla Terrazzo **LLT221** | Notte Terrazzo **LLT222**

# RESTAURANTS

Create the right ambience with wood- and stone-inspired designs, abstract concepts and solid colors for an installation that complements any restaurant aesthetic.



■ Leyster Oak WP425 | Sillano Marble SP816

## Restaurant-Ready

Karndean luxury vinyl is waterproof and easy to clean – no harsh chemicals or machinery needed.



■ Leyster Oak WP425

# MULTI-FAMILY

Create stylish spaces that feel like home for residents without costly, time-consuming maintenance for building staff and management.



■ Mountain Slate RKT3003-G



■ Bridgeport LLP157

### Fast, Easy Installation

Save time and money on unit turnover with our easy-to-install loose lay and rigid core installation formats.

# OFFICE


Thoughtful office design can stimulate the senses and create mood-enhancing energy. Use our loose lay and gluedown luxury vinyl in custom lay patterns that add visual interest and reflect the uniqueness of an organization's brand.



■ Tortora Breccia Marble **RKT3018-G**

## Quieter Environments

Our rigid core and loose lay luxury vinyl is made with a sound-absorbing backing that reduces noise in multi-story environments.

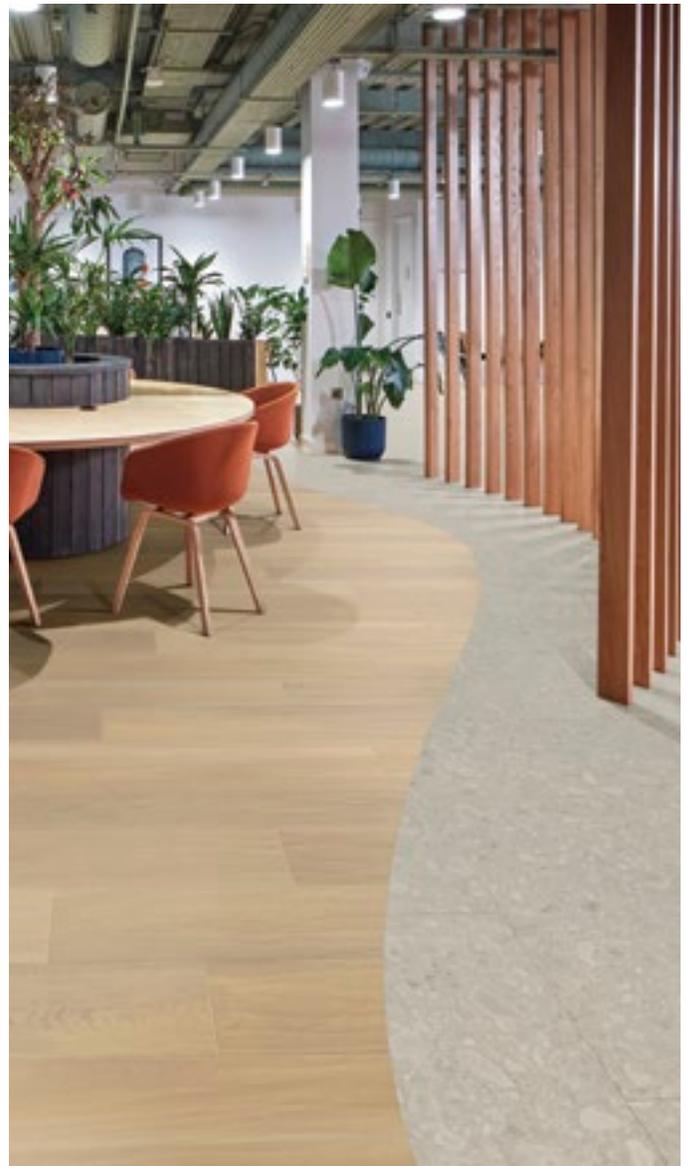

■ Dune Oak **RL24** | Brezza Ceppo **LM43**

# luxury vinyl designs and collections

## STYLE AND PERFORMANCE FOR COMMERCIAL ENVIRONMENTS

Inspired by wood and stone hand-selected from around the world, our stylish, durable luxury vinyl flooring is guaranteed for up to 20 years in commercial settings. Available in three installation formats - gluedown, rigid core and loose lay - you can choose from hundreds of original designs to create beautiful spaces.

The variety of wood- and stone-inspired designs, abstract visuals and solid colors offers limitless creative possibilities – including the ability to mix and match for zoning and wayfinding.



### The beauty of wood and stone

Every wood- and stone-inspired design is a Karndean original, beautifully capturing the distinctive characteristics of the hand-selected natural materials that inspired our design.



### Waterproof and easy to clean

Our flooring is impervious to water, and it's easy to clean, too, with a pH neutral solution and mop. No harsh chemicals, waxing or machinery are needed.



### Exceptional durability

Guaranteed for up to 20 years with wear layers up to 30 mil, our luxury vinyl features K-Guard+® surface protection for scratch- and scuff-resistance.



### Quieter environments

Loose lay and rigid core flooring has a sound-absorbing backing that reduces noise to lower floors. Our QuietChoice underlayment can be used with gluedown products to meet IIC 50 code requirements.



### Installation options

Choose from gluedown, loose lay or rigid core for installation based on site and project needs.



### Safe and hygienic

Our luxury vinyl is nonporous and does not harbor dust or contribute to bacterial growth. Materials used in the product are tested for safety.

All our collections offer something different — wear layer, thickness, installation format — but they've got one thing in common: stylish designs for creating beautiful spaces. Light or dark. Cool, warm or neutral. Choose from hundreds of wood and stone looks, or expand your creative palette with abstracts and solid colors.




■ Barolo Oak WP429 | Niveus WP411

# INSTALLATION FORMATS

Choose from gluedown, loose lay or rigid core luxury vinyl based on site and project needs.

## Gluedown

Gluedown provides limitless design possibilities, including the ability to mix and match for zoning and wayfinding. Pieces can be cut and laid to create beautiful custom installations.

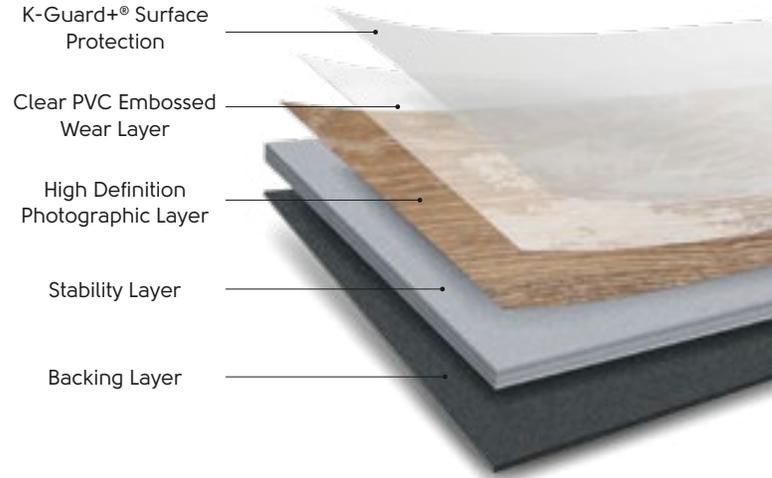


## Loose lay

Loose lay combines the best features of gluedown and rigid core. Create custom installations, like gluedown, with the fast, easy installation of a non-adhesive “floating” floor.

It’s all possible because of our K-Wave® friction-grip backing, which holds the floor in place – adhesive is only required around a perimeter. Karndean LooseLay also includes SureFit™ technology for increased dimensional stability, eliminating the need for expansion gaps and transition strips.


At 4.5 mm thick, Karndean LooseLay transitions easily to most carpet tile. Although it’s made for installation as a floating floor, the product also can be fully glued down if preferred.

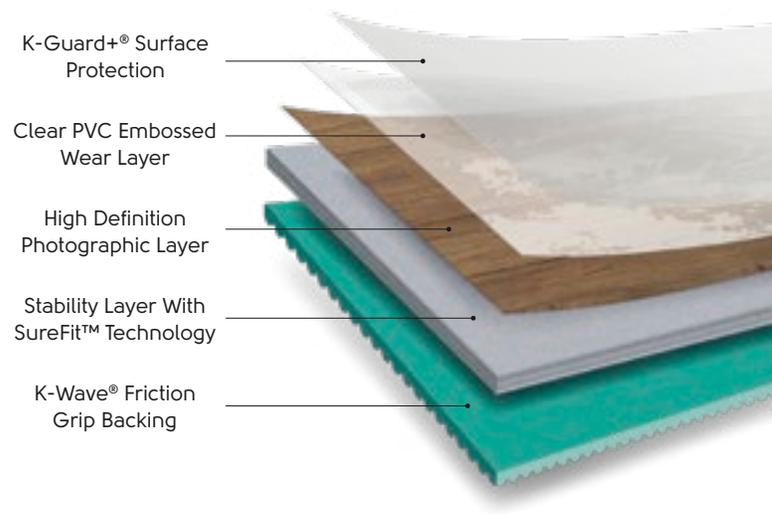

## Rigid core

Rigid core is an easy-to-install “floating floor” that requires minimal site prep – pieces easily click and lock together, without the need for adhesive. Our rigid core flooring includes K-Core® technology that ensures a stable core for installation over most hard subfloors, concealing imperfections.

Rigid core also contributes to quieter environments, with a backing that reduces noise to lower floors by up to 25 dB.

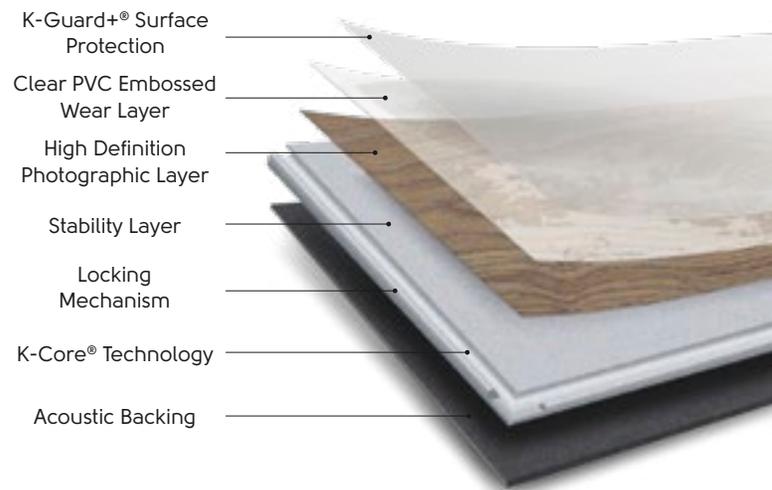

### Gluedown benefits



#### Custom layouts

Create one-of-a-kind installations, including zoning and wayfinding



#### Creative possibilities

Compatible with our design strips and decorative borders for more customization



#### Easy to replace

Single planks and tiles can be lifted and replaced



#### Seamless installations

No expansion gaps or transition strips needed

### Loose lay benefits



#### Fast, easy installation

K-Wave® friction-grip backing keeps flooring in place – no full-spread adhesive required



#### Quieter spaces

K-Wave® backing reduces noise to lower floors by 16 dB and provides extra cushion



#### Seamless installations

SureFit™ technology increases dimensional stability, eliminating need for expansion gaps



#### Easy to replace

Single planks and tiles can be lifted and replaced



#### Custom layouts

Create one-of-a-kind installations, including zoning and wayfinding

### Rigid core benefits



#### Fast, easy installation

Pieces easily click and lock together – no adhesive required and minimal site prep



#### K-Core® technology

Ensures a stable core for installation over most hard subfloors, concealing imperfections



#### Quieter spaces

Backing reduces noise to lower floors by up to 25 dB and provides extra cushion

# PRODUCT COLLECTIONS

Collection	Beveled Edge	Plank Size (inches)	Tile Size (inches)	Thickness (mm)
<b>Gluedown</b>				
<b>Art Select</b>	Standard	28.0" x 4.5" 36.0" x 6.0" 48.0" x 4.5" 48.0" x 7.0" 56.0" x 9.0"	18.0" x 24.0" 18.0" x 18.0" 18.0" x 36.0"	3.0
<b>Van Gogh</b>	Micro	48.0" x 7.0"	N/A	3.0
<b>Opus</b>	Micro**	36.0" x 6.0" 36.0" x 4.0" 48.0" x 9.0"	3.0" x 18.0" 6.0" x 36.0" 9.0" x 9.0" 12.0" x 12.0" 18.0" x 24.0" 18.0" x 36.0" 18.0" x 18.0" 24.0" x 24.0"	2.5
<b>Knight Tile</b>	No	36.0" x 6.0" 48.0" x 9.0"	12.0" x 18.0"	2.0
<b>Loose lay</b>				
<b>Karndean LooseLay</b>	No	59.06" x 9.84" 41.34" x 9.84"	19.69" x 24.02" 18" x 36" 23.62" x 23.62"	4.5
<b>Rigid core</b>				
<b>Art Select</b>	Standard	28.0" x 4.25" 36.0" x 5.91" 48.0" x 4.25" 48.03" x 7.05" 55.91" x 8.86"	18.0" x 18.0" 17.99" x 23.62" 18.0" x 36.0"	7.0
<b>Van Gogh</b>	Micro	48.03" x 7.09"	N/A	4.5
<b>Knight Tile</b>	Wood: No Stone: Painted	36.0" x 5.91" 48.03" x 8.86"	12.0" x 18.0"	4.5
<b>Korlok Select</b>	Micro	55.91" x 8.86" 23.46" x 5.87"	17.99" x 23.62" 17.99" x 36.81" 5.87" x 23.46"	6.5
<b>Korlok Reserve</b>	Micro	48.03" x 7.05"	N/A	6.5

<sup>^</sup> Subject to terms. Please see our website.

<sup>±</sup> Subject to terms. Light commercial use only.

\*\* Opus Heritage Collection tiles have standard beveled edges

\*\*\* Nominal.

Wear Layer mil (mm)	Commercial Warranty^
30*** (0.7)	20 years
20 (0.5)	15 years
20 (0.5)	15 years
12 (0.3)	10 years†
20 (0.5)	15 years
30 (0.7)	20 years
20 (0.5)	15 years
12 (0.3)	10 years†
20 (0.5)	15 years
20 (0.5)	15 years

# Wood-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay



■ KPI05  
■ SCB-KPI05-6



■ RKP8217



■ RL38  
■ AKP-RL38



■ KPI33  
■ SCB-KPI33-6



■ KPI54  
■ SCB-KPI54-6



■ RL45  
■ AKP-RL45



■ VGW137T  
■ SCB137



■ LLP95



■ KPI59  
■ SCB-KPI59-6



■ LLP306



■ LLP355



■ RL32  
■ AKP-RL32



■ RKP8105



■ SM-RKP8105



■ RL35  
■ AKP-RL35



■ RCP6546



■ WP432



■ RKP8249



■ LLP157




■ LLP353



■ VGW148T  
■ SCB148



■ LLP373



■ RL26  
■ AKP-RL26




■ SM-RL26  
■ AKP-SM-RL26



■ RL43  
■ AKP-RL43




■ RL21  
■ AKP-RL21




■ SM-RL21-28  
■ AKP-SM-RL21-28



■ WP411



■ LLP330



■ KPI44  
■ SCB-KPI44-6




■ WP311




■ RKP8236



■ RKP8108




■ RKP8116



■ SM-RKP8116




■ VGW151T  
■ SCB151

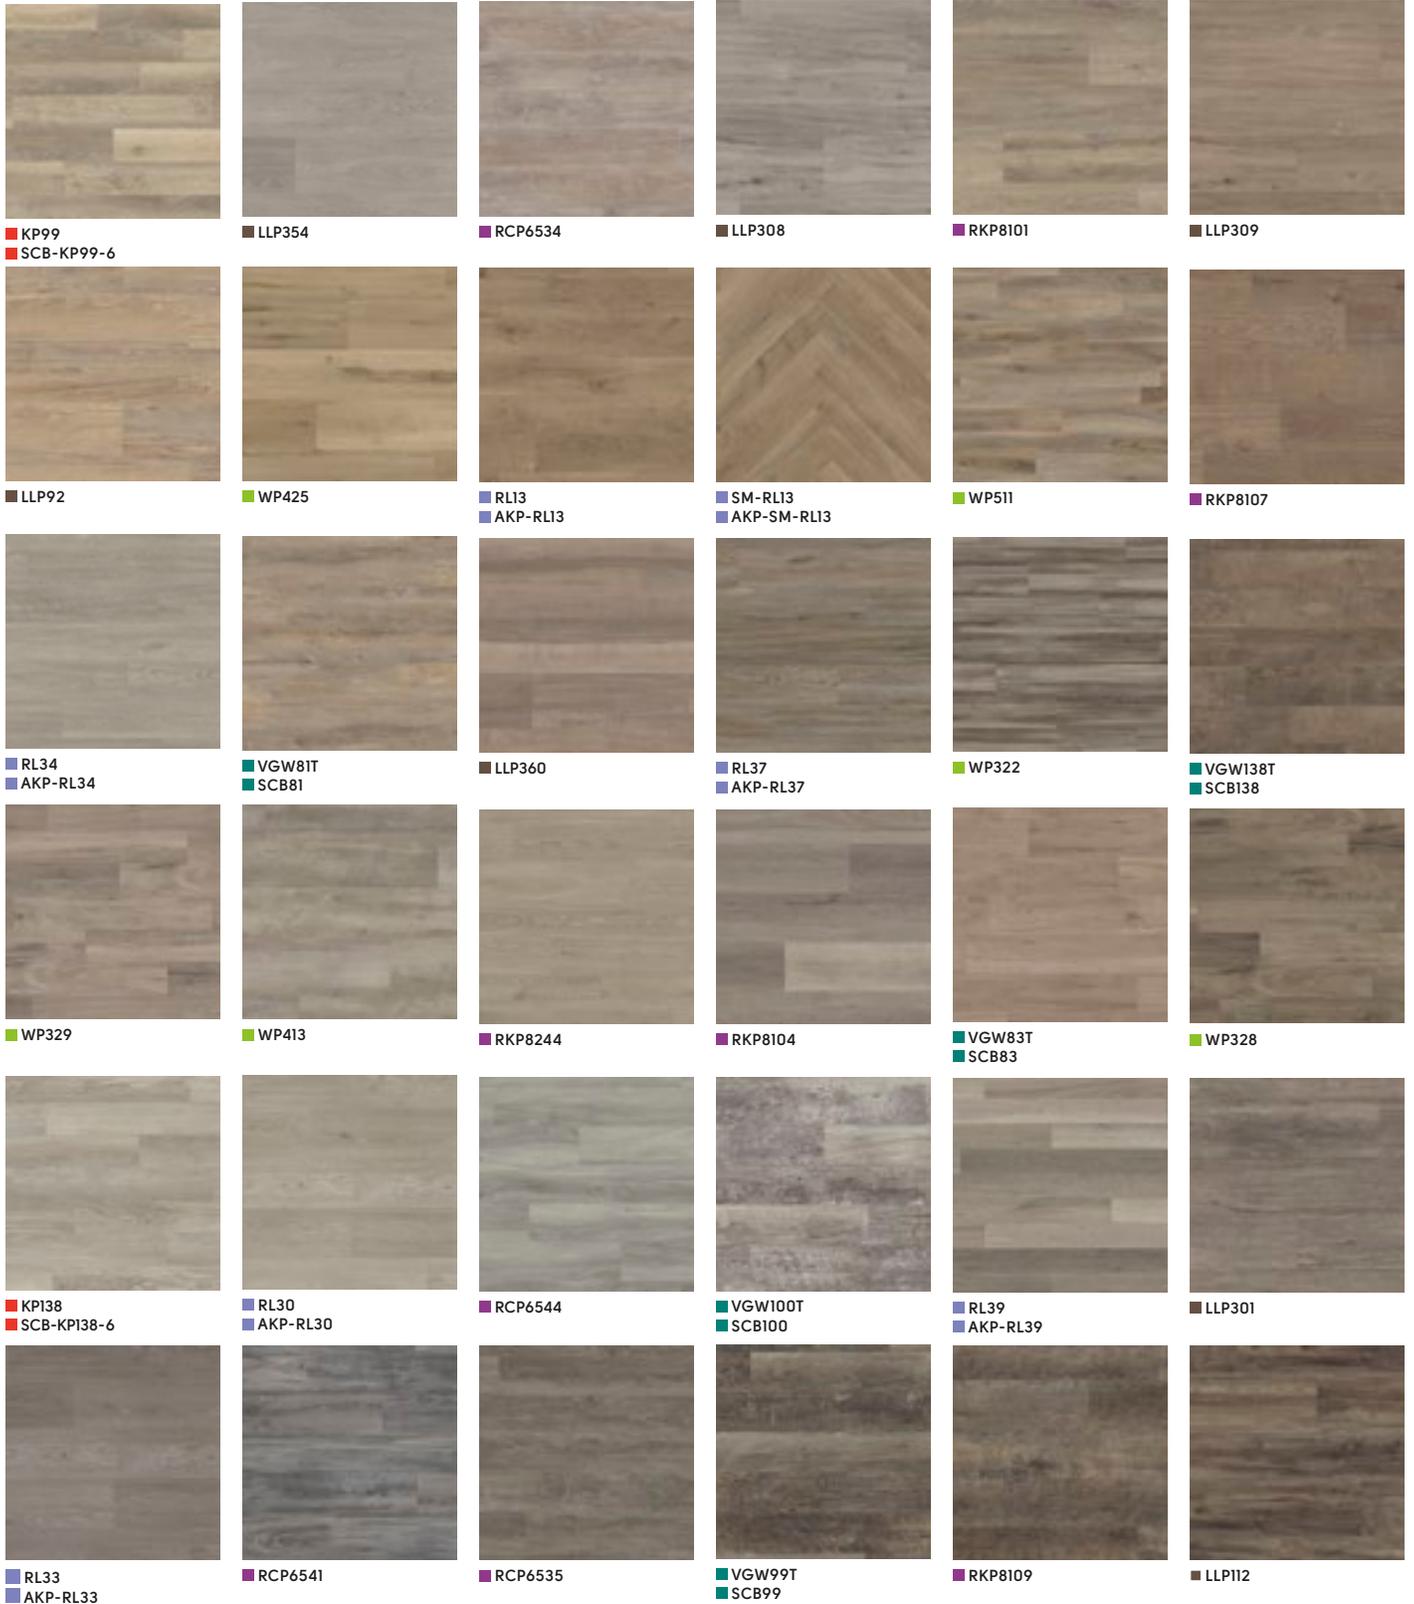


# Wood-Inspired Designs

Product Collections:

■ Kortlok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay

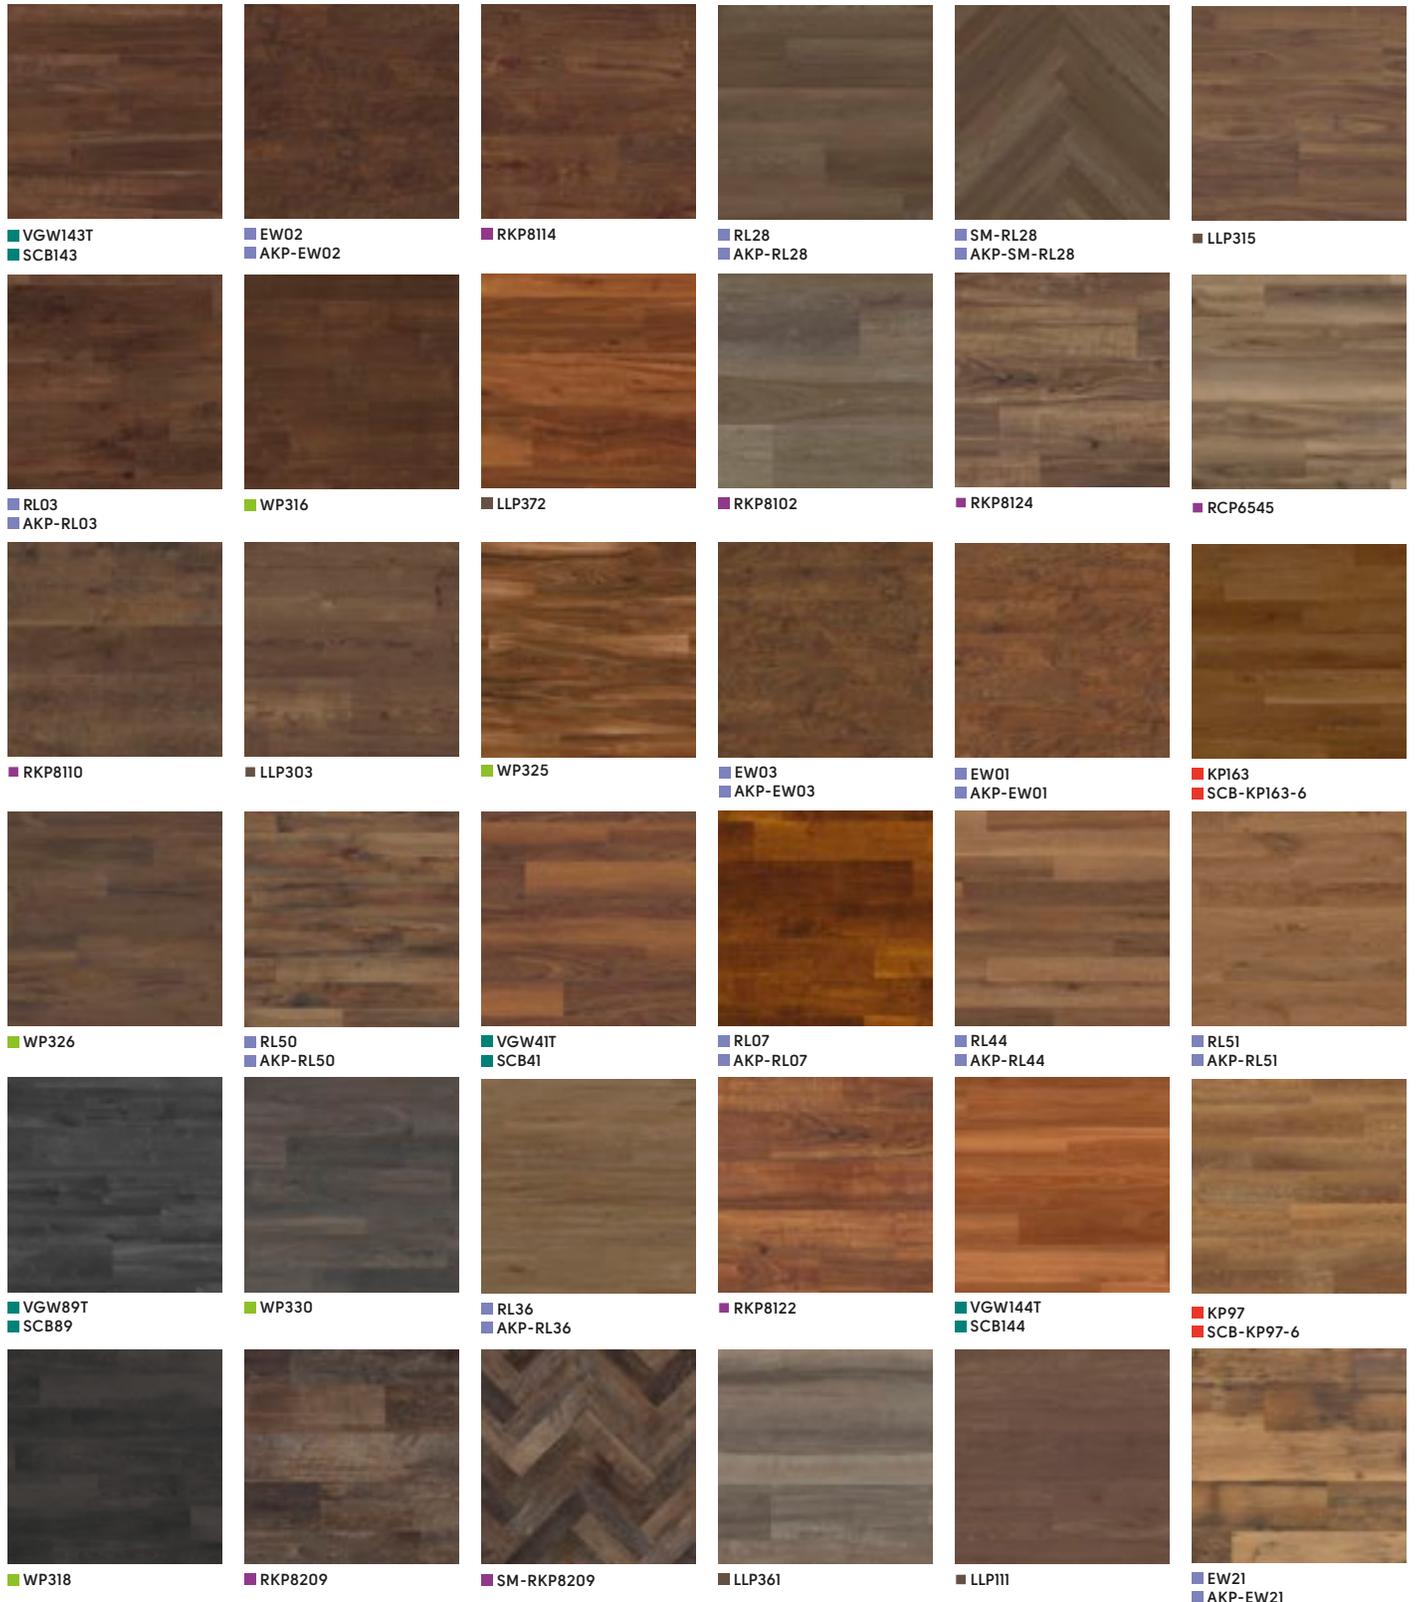


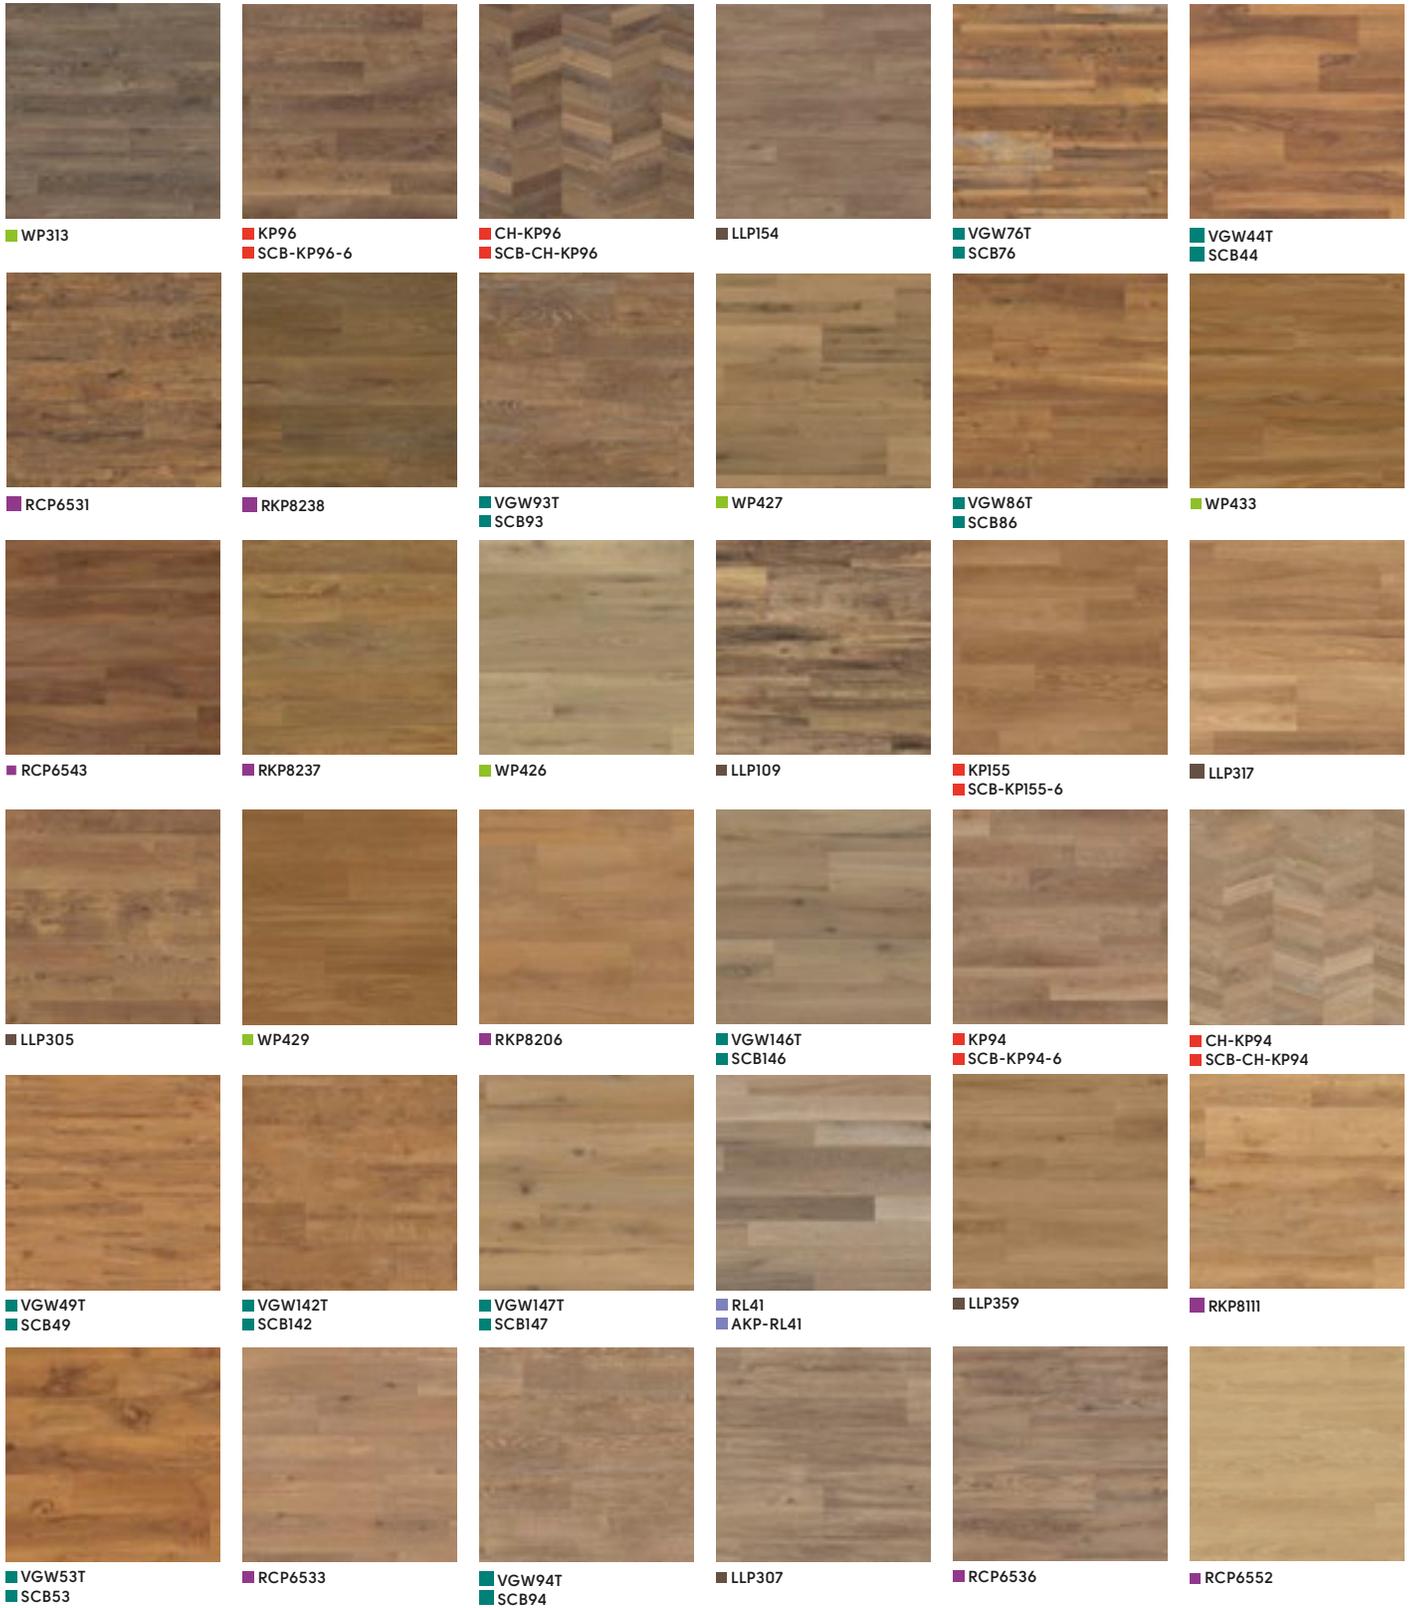

# Wood-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Van Gogh | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay

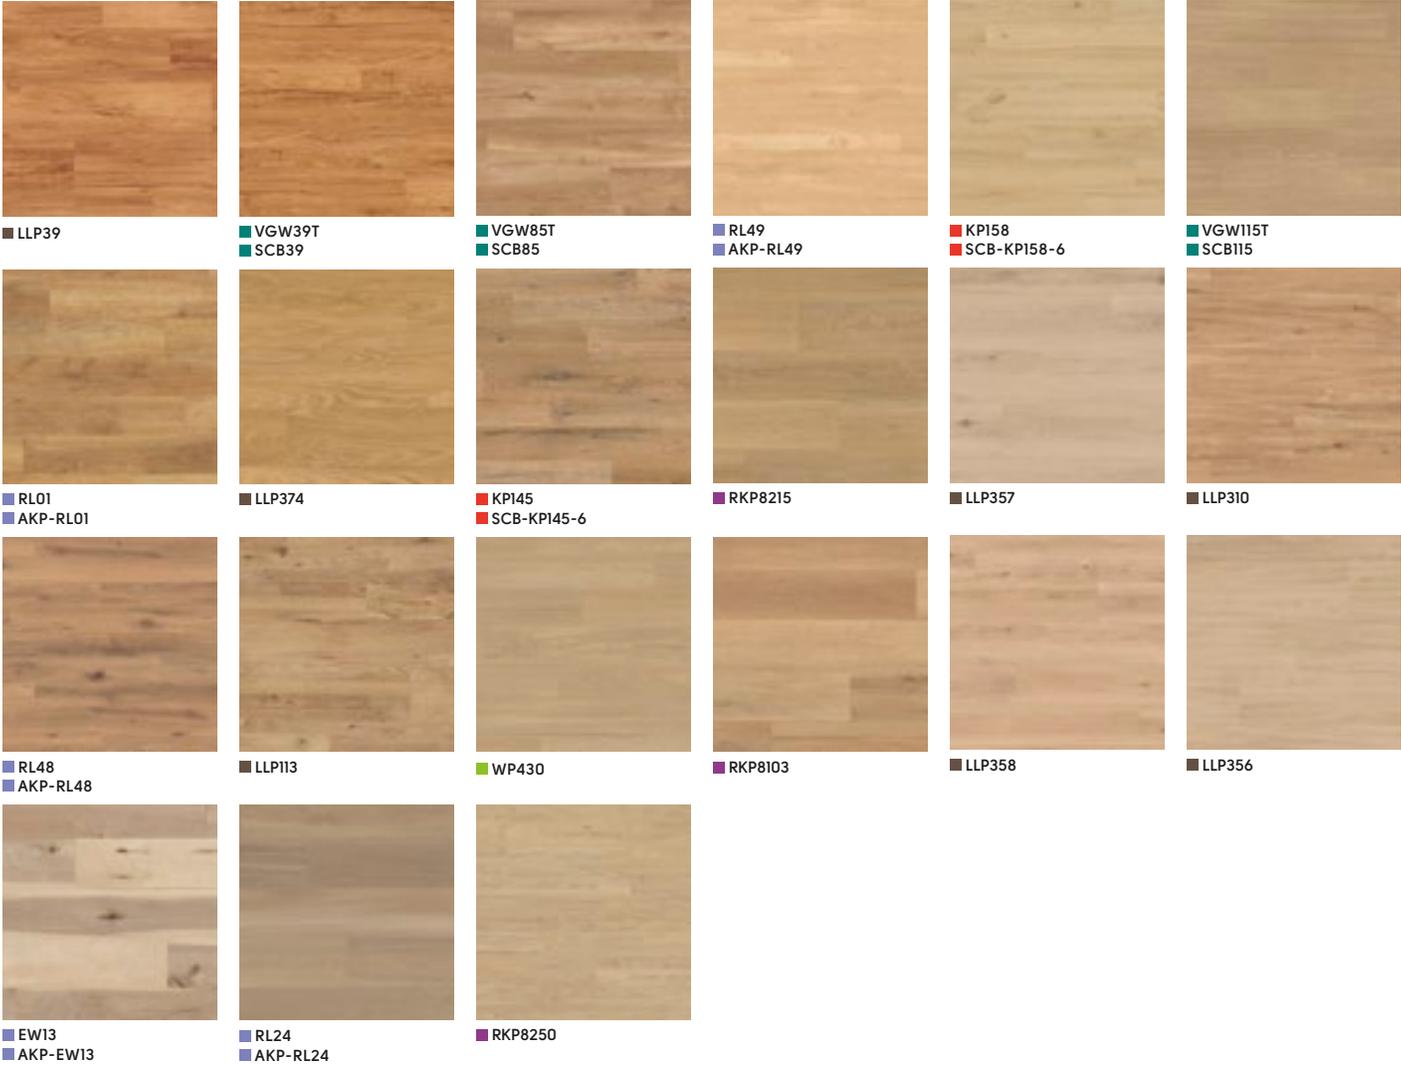




■ Meadow Cherry KPI58 | SCB-KPI58-6

# Stone-Inspired Designs

Product Collections:

■ Korlok | ■ Art Select | ■ Opus | ■ Knight Tile | ■ Karndean LooseLay



■ RKT3013-G



■ SM-RKT3013-G



■ LM33  
■ AKT-LM33



■ LM32  
■ AKT-LM32



■ LM35  
■ AKT-LM35



■ RKT3021-G



■ ST31  
■ SCB-ST31-G



■ LLT223



■ LLT225



■ SP816



■ ST17  
■ SCB-ST17-G



■ LM50  
■ AKT-LM50



■ LLT220



■ ST18  
■ SCB-ST18-G



■ ST33  
■ SCB-ST33G



■ SP811



■ RKT2408



■ LM37  
■ AKT-LM37



■ LM40  
■ AKT-LM40



■ LM44  
■ AKT-LM44



■ LM43  
■ AKT-LM43



■ LM30  
■ AKT-LM30



■ SP812



■ LLT221



■ LM42  
■ AKT-LM42




■ LM39  
■ AKT-LM39



■ LLT201



■ RKT3018-G




■ RKT3011-G



■ ST24  
■ SCB-ST24-G



■ LM51  
■ AKT-LM51



■ LM45  
■ AKT-LM45



■ SP714




■ ST16  
■ SCB-ST16-G



■ SP213




■ RKT2417-G

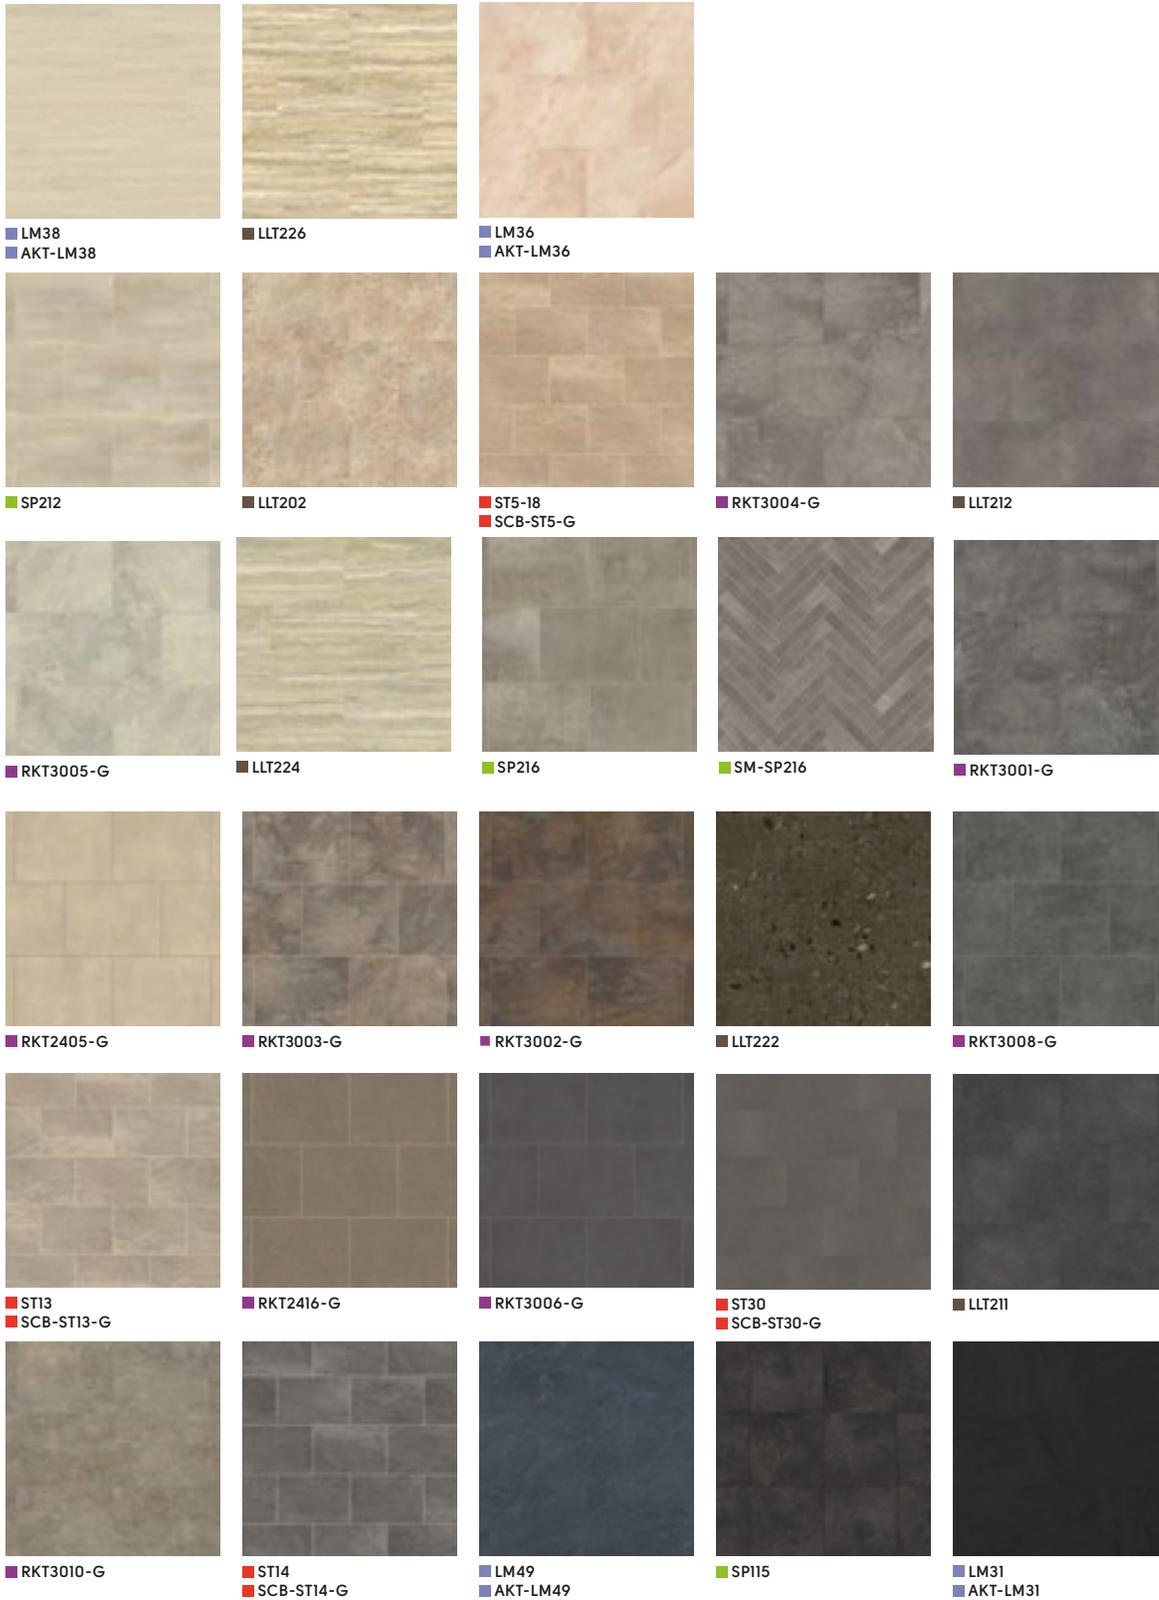

# Abstract-Inspired Designs

Product Collection:

■ Opus



■ SP116



■ SP731




■ SP733



■ SP734



■ SP219



■ SP118



■ SP729



■ SP117



■ SP724  
■ SP725



■ SP722  
■ SP723



■ SP726




■ SP719



■ SP740



■ SP720



■ MAYF-02



■ SP730




■ SP735



■ SP732



■ SP727  
■ SP728



■ MAYF-01



■ CLIF-04



■ CLIF-01



■ Salute Grigio **SP118** | Burnt Sienna **SP719** | Indigo **SP720** | Yellow Ochre **SP726**

# Art Select

This collection elevates design to an artform, combining hands-on craftsmanship and cutting-edge manufacturing technology to replicate hardwood and stone flooring in breathtaking detail. Backed by a 20-year commercial warranty, the collection includes almost 50 beautifully realistic wood and stone designs – all with a top-of-the-line 30 mil wear layer, and all available in both gluedown and rigid core for installation.

Sophisticated design to commercial-grade durability, Art Select offers unparalleled style and performance.



■ Lago Quartzite LM49 | AKT-LM49



## 5G® Locking Mechanism

Art Select rigid core can be installed with confidence. Backed by our HoldFast™ 20-year warranty, the 5G® locking mechanism securely locks pieces at the end seams with a single click.

Gluedown	Art Select	Rigid Core
36.0" x 6.0"   56.0" x 9.0"   48.0" x 7.0" 48.0" x 4.50"   28.0" x 4.50"	Plank Size	36.0" x 5.91"   55.91" x 8.86"   48.03" x 7.05"   48.0" x 4.25"   28.0" x 4.25"
18.0" x 18.0"   18.0" x 36.0"   18.0" x 24.0"	Tile Size	18.0" x 18.0"   18.0" x 36.0"   17.99" x 23.62"
30mil	Wear Layer	30mil
3mm	Thickness	7mm
20 years	Commercial Warranty	20 years
Begins with EW   RL   SM-RL   LM	Product Code	Begins with AKP-   AKT-

	Standard	Gluedown	Rigid Core
<b>Size</b>	ASTM F2421	See Product Listing N/A	N/A See Product Listing
<b>Locking system<sup>1</sup></b>		N/A	5G® Fold Down installation system <sup>2</sup> 
<b>Thickness</b>	ASTM F386 ASTM F387	3.0 mm N/A	N/A 7.0 mm
<b>Wear layer</b>	ASTM F410	30 mil <sup>3</sup> (0.7 mm)	30 mil <sup>3</sup> (0.7 mm)
<b>Surface treatment</b>		K-Guard+® PU coating	K-Guard+® PU coating
<b>Warranty<sup>4</sup></b>	Commercial	20 years	20 years
<b>Beveled edge</b>		Standard	Standard
<b>Classification</b>		ASTM 1700: Class III Type B	ASTM F3261: Resilient flooring with Rigid Polymeric Core
<b>Reaction to fire</b>	ASTM E648-06	Class 1	Class 1
<b>Smoke density</b>	ASTM E662-06	Pass (<450)	N/A
<b>Flammability test</b>	ASTM D2859	Pass	Pass
<b>Slip resistance<sup>5</sup></b>	ASTM D2047	Pass (Dry 0.80)	Pass (Dry > 0.8)
<b>Staining resistance</b>	ASTM F925	Pass	Pass
<b>Heat fastness</b>	ASTM F1514	N/A	Pass
<b>Light fastness</b>	ASTM F1515	Pass	Pass
<b>Electrostatic propensity</b>	AATCC 134-1996	N/A	1.7 kv
<b>Abrasion resistance</b>	ASTM D4060	Pass (>50,000 Cycles)	Pass (>50,000 Cycles)
<b>Dimensional stability</b>	ASTM F2199 ISO 23999	Pass N/A	N/A Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179 ASTM E492	ΔIIC = 9 dB IIC = 46 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC = 25 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
<b>Static load</b>	ASTM F970	Pass (1800 psi at 0.005")	Pass (400 psi at 0.005")
<b>Indentation - residual</b>	ASTM F1914	Pass	Pass
<b>Thickness swell</b>	NALFA 3.2	N/A	Pass (Class 4)
<b>Flexibility</b>	ASTM F137	Pass	N/A
<b>Adhesive</b>		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our instructions.
<b>Environmental</b>	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332  ISO 14001 / ISO 9001  ASSURE CERTIFIED™	Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Conformance product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
<b>Recycling</b>		Suitable	Suitable
<b>Phthalate free</b>	CPSC-C1001-09.3 CPSC-C1001-09.4	Yes N/A	N/A Yes

1 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 5G® along short edge; 2G™ long edge

3 Nominal.

4 Subject to terms. Please see our website.

5 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Art Select **Wood Designs**

Gluedown: 28.0" x 4.50" (35ft<sup>2</sup> per box) | Rigid Core\*: 28.0" x 4.25" (24.79ft<sup>2</sup> per box)



Basque Oak - Accent Plank  
Gluedown **SM-RL26** | Rigid Core **AKP-SM-RL26**  
Image of full-sized plank on page 43



Glacier Oak - Accent Plank  
Gluedown **SM-RL21-28** | Rigid Core **AKP-SM-RL21-28**  
Image of full-sized plank on page 43



Salon Oak - Accent Plank  
Gluedown **SM-RL13** | Rigid Core **AKP-SM-RL13**  
Image of full-sized plank on page 41



Serrano Oak - Accent Plank  
Gluedown **SM-RL28** | Rigid Core **AKP-SM-RL28**  
Image of full-sized plank on page 42



■ Basque Oak **SM-RL26** | **AKP-SM-RL26**



Available in gluedown and rigid core installation formats.

\*These SKUs can only be laid in a herringbone pattern.

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box) | Rigid Core: 36.0" x 5.91" (23.62ft<sup>2</sup> per box)



Hickory Paprika  
Gluedown **EW01**  
Rigid Core **AKP-EW01**



Hickory Nutmeg  
Gluedown **EW03**  
Rigid Core **AKP-EW03**



Hickory Peppercorn  
Gluedown **EW02**  
Rigid Core **AKP-EW02**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Wood Designs**

Gluedown: 48.0" x 4.50" (36ft<sup>2</sup> per box) | Rigid Core: 48.0" x 4.25" (25.5ft<sup>2</sup> per box)



Canadian Maple  
Gluedown **RL49**  
Rigid Core **AKP-RL49**

Natural Oak  
Gluedown **RL48**  
Rigid Core **AKP-RL48**

Golden Kent Ash  
Gluedown **RL44**  
Rigid Core **AKP-RL44**

Lorenzo Warm Oak  
Gluedown **RL51**  
Rigid Core **AKP-RL51**

Blended Oak  
Gluedown **RL50**  
Rigid Core **AKP-RL50**



Available in gluedown and rigid core installation formats.



Canterbury Ash  
Gluedown **RL41**  
Rigid Core **AKP-RL41**



Belmont Hickory  
Gluedown **RL45**  
Rigid Core **AKP-RL45**



Fieldstone Ash  
Gluedown **RL43**  
Rigid Core **AKP-RL43**



Castle Hill Ash  
Gluedown **RL39**  
Rigid Core **AKP-RL39**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Wood Designs**

Gluedown: 48.0" x 7.0" (35ft<sup>2</sup> per box) | Rigid Core: 48.03" x 7.05" (23.51ft<sup>2</sup> per box)



Spring Oak  
Gluedown **RL01**  
Rigid Core **AKP-RL01**



Merino Oak  
Gluedown **RL36**  
Rigid Core **AKP-RL36**



Autumn Oak  
Gluedown **RL03**  
Rigid Core **AKP-RL03**



Santina Cherry  
Gluedown **RL07**  
Rigid Core **AKP-RL07**



Cotton Oak  
Gluedown **RL38**  
Rigid Core **AKP-RL38**



Available in gluedown and rigid core installation formats.



Damask Oak  
Gluedown **RL35**  
Rigid Core **AKP-RL35**



Canvas Oak  
Gluedown **RL34**  
Rigid Core **AKP-RL34**



Salon Oak  
Gluedown **RL13**  
Rigid Core **AKP-RL13**



Tweed Oak  
Gluedown **RL37**  
Rigid Core **AKP-RL37**

**Disclaimer: color and pattern reproduction**


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select **Wood Designs**

Gluedown: 56.0" x 9.0" (35ft<sup>2</sup> per box) | Rigid Core: 55.91" x 8.86" (27.51ft<sup>2</sup> per box)



Classic Hickory  
Gluedown **EW13**  
Rigid Core **AKP-EW13**

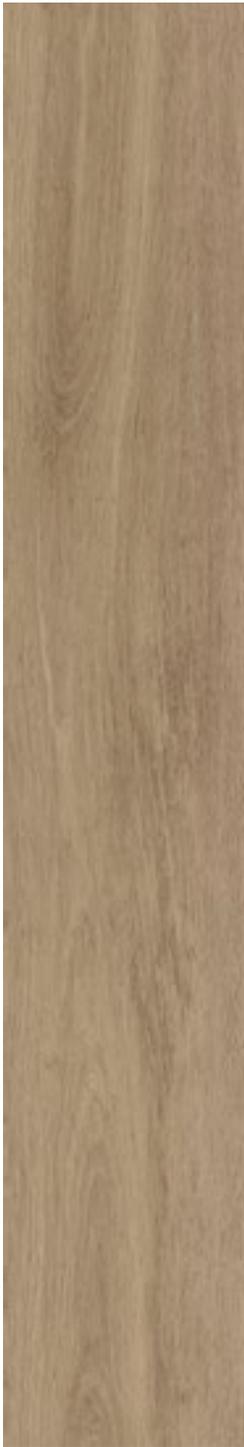

Dune Oak  
Gluedown **RL24**  
Rigid Core **AKP-RL24**



Reclaimed Chestnut  
Gluedown **EW21**  
Rigid Core **AKP-EW21**



Serrano Oak  
Gluedown **RL28**  
Rigid Core **AKP-RL28**



Pale Artisan Oak  
Gluedown **RL32**  
Rigid Core **AKP-RL32**



Available in gluedown and rigid core installation formats.



Basque Oak  
Gluedown **RL26**  
Rigid Core **AKP-RL26**



Glacier Oak  
Gluedown **RL21**  
Rigid Core **AKP-RL21**



Dove Artisan Oak  
Gluedown **RL30**  
Rigid Core **AKP-RL30**



Grey Artisan Oak  
Gluedown **RL33**  
Rigid Core **AKP-RL33**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select Stone Designs

Gluedown: 18.0" x 24.0" (36ft<sup>2</sup> per box) | Rigid Core: 17.99" x 23.62" (23.61ft<sup>2</sup> per box)



Alpine Quartzite  
Gluedown **LM50**  
Rigid Core **AKT-LM50**

Gluedown: 18.0" x 18.0" (36ft<sup>2</sup> per box) | Rigid Core: 18.0" x 18.0" (22.50ft<sup>2</sup> per box)



Doric Marble  
Gluedown **LM32**  
Rigid Core **AKT-LM32**



Sterling Quartzite  
Gluedown **LM51**  
Rigid Core **AKT-LM51**



Ionic Marble  
Gluedown **LM30**  
Rigid Core **AKT-LM30**



Lago Quartzite  
Gluedown **LM49**  
Rigid Core **AKT-LM49**



Corinthian Marble  
Gluedown **LM31**  
Rigid Core **AKT-LM31**



Available in gluedown and rigid core installation formats.



■ Doric Marble LM32 | Ionic Marble LM30 | Corinthian Marble LM31

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Art Select Stone Designs

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box) | Rigid Core: 18.0" x 36.0" (27ft<sup>2</sup> per box)



Pearl Onyx  
Gluedown **LM35**  
Rigid Core **AKT-LM35**



Silk Travertino  
Gluedown **LM37**  
Rigid Core **AKT-LM37**



Calacatta d'Oro  
Gluedown **LM33**  
Rigid Core **AKT-LM33**



Pavimento Crema  
Gluedown **LM40**  
Rigid Core **AKT-LM40**



Brezza Ceppo  
Gluedown **LM43**  
Rigid Core **AKT-LM43**



Pavimento Bianco  
Gluedown **LM42**  
Rigid Core **AKT-LM42**




Available in gluedown and rigid core installation formats.



Caliza Classico  
Gluedown **LM39**  
Rigid Core **AKT-LM39**



Rose Onyx  
Gluedown **LM36**  
Rigid Core **AKT-LM36**

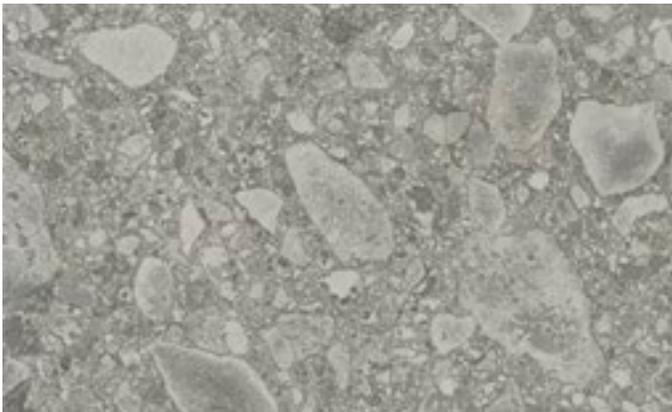

Naturale Ceppo  
Gluedown **LM45**  
Rigid Core **AKT-LM45**



Sabbia Ceppo  
Gluedown **LM44**  
Rigid Core **AKT-LM44**



Champagne Travertino  
Gluedown **LM38**  
Rigid Core **AKT-LM38**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh

From oak floorboards found in a Holland farmhouse to cedar planks salvaged from a school in San Diego, our Van Gogh collection is inspired by wood samples from around the world, beautifully capturing the distinctive textures and grain details that make them unique.



■ Frosted Birch VGW83T | SCB83

Gluedown	Van Gogh	Rigid Core
48.0" x 7.0"	Plank Size	48.03" x 7.09"
20mil	Wear Layer	20mil
3mm	Thickness	4.5mm
15 years	Commercial Warranty	15 years
Begins with VGW	Product Code	Begins with SCB

	Standard	Gluedown	Rigid Core
<b>Size</b>	ASTM F2421	See Product Listing	See Product Listing
<b>Thickness</b>	ASTM F386 ASTM F387	3.0 mm N/A	N/A 4.5 mm
<b>Locking system<sup>1</sup></b>		N/A	Click locking system
<b>Wear layer</b>	ASTM F410	20 mil (0.50 mm)	20 mil (0.50 mm)
<b>Surface treatment</b>		K-Guard+® PU coating	K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial	15 Years	15 Years
<b>Beveled edge</b>		Micro	Micro
<b>Classification</b>	ASTM F1700 ASTM F3261	Class III Type B N/A	N/A Pass: Resilient flooring with Rigid Polymeric Core
<b>Reaction to fire</b>	ASTM E648-06	Class 1	Class 1
<b>Smoke density</b>	ASTM E662-06	Pass (< 450)	Pass (< 450)
<b>Flammability test</b>	ASTM D2859	Pass	Pass
<b>Slip resistance<sup>3</sup></b>	ASTM D2047	Pass (Dry 0.89)	Pass (Dry 0.8)
<b>Staining resistance</b>	ASTM F925	Pass	Pass
<b>Heat fastness</b>	ASTM F1514	Pass	Pass
<b>Light fastness</b>	ASTM F1515	Pass	Pass
<b>Electrostatic propensity</b>	AATCC 134-1996	N/A	1.1 kV
<b>Abrasion resistance</b>	ASTM D4060	Pass (25,000 cycles)	Pass (20,000 Cycles)
<b>Dimensional stability</b>	ASTM F2199 ISO 23999	Pass N/A	N/A Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179-09 ASTM E492-09	ΔIIC = 6 dB IIC = 46 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC = 22 dB IIC = 69 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
<b>Static load</b>	ASTM F970	Pass (1,000 psi at 0.005")	Pass (600 psi at 0.005")
<b>Indentation - residual</b>	ASTM F1914	Pass	Pass
<b>Flexibility</b>	ASTM F137	Pass	N/A
<b>Adhesive</b>		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our instructions.
<b>Environmental</b>	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332  ISO 14001 / ISO 9001  ASSURE CERTIFIED™	Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; compliant low-emitting VOCs. N/A  N/A  Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
<b>Recycling</b>		Suitable	Suitable
<b>Phthalate free</b>	CPSC-C-1001-09.3	Yes	Yes

<sup>1</sup> Produced under license from Flooring Industries

<sup>2</sup> Subject to terms. Please see our website.

<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Van Gogh **Wood Designs**

Gluedown: 48.0" x 7.0" (35ft<sup>2</sup> per box) | Rigid Core: 48.03" x 7.09" (23.64ft<sup>2</sup> per box)



Indy Urban Elm  
Gluedown **VGW148T**  
Rigid Core **SCB148**



Natural Prime Oak  
Gluedown **VGW115T**  
Rigid Core **SCB115**



French Oak  
Gluedown **VGW85T**  
Rigid Core **SCB85**



Honey Oak  
Gluedown **VGW94T**  
Rigid Core **SCB94**



Rimu  
Gluedown **VGW49T**  
Rigid Core **SCB49**



Available in gluedown and rigid core installation formats.



Lancewood  
Gluedown **VGW44T**  
Rigid Core **SCB44**



Natural School Cedar  
Gluedown **VGW142T**  
Rigid Core **SCB142**



Antique Karri  
Gluedown **VGW39T**  
Rigid Core **SCB39**



Vintage Pine  
Gluedown **VGW76T**  
Rigid Core **SCB76**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh Wood Designs

Gluedown: 48.0" x 7.0" (35ft<sup>2</sup> per box) | Rigid Core: 48.03" x 7.09" (23.64ft<sup>2</sup> per box)



Honey Apres Oak  
Gluedown **VGW147T**  
Rigid Core **SCB147**



Natural Vintage Pine  
Gluedown **VGW151T**  
Rigid Core **SCB151**



Sable Apres Oak  
Gluedown **VGW146T**  
Rigid Core **SCB146**



Classic Oak  
Gluedown **VGW86T**  
Rigid Core **SCB86**



Hessian Oak  
Gluedown **VGW93T**  
Rigid Core **SCB93**



Available in gluedown and rigid core installation formats.



Wellington Oak  
Gluedown **VGW53T**  
Rigid Core **SCB53**



Smoked Oak  
Gluedown **VGW70T**  
Rigid Core **SCB70**



Auburn Spotted Gum  
Gluedown **VGW144T**  
Rigid Core **SCB144**



Merbau  
Gluedown **VGW41T**  
Rigid Core **SCB41**



Ohana Koa  
Gluedown **VGW143T**  
Rigid Core **SCB143**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Van Gogh Wood Designs

Gluedown: 48.0" x 7.0" (35ft<sup>2</sup> per box) | Rigid Core: 48.03" x 7.09" (23.64ft<sup>2</sup> per box)



Silver Farmhouse Oak  
Gluedown **VGW137T**  
Rigid Core **SCB137**

Country Oak  
Gluedown **VGW81T**  
Rigid Core **SCB81**

Aged Redwood  
Gluedown **VGW100T**  
Rigid Core **SCB100**

Frosted Birch  
Gluedown **VGW83T**  
Rigid Core **SCB83**

Smoked School Cedar  
Gluedown **VGW138T**  
Rigid Core **SCB138**



Available in gluedown and rigid core installation formats.



Reclaimed Redwood  
Gluedown **VGW99T**  
Rigid Core **SCB99**



Ebony  
Gluedown **VGW89T**  
Rigid Core **SCB89**



■ Smoked School Cedar **VGW138T | SCB138**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus

With designs that skew modern and contemporary, the Opus collection dramatically expands the creative palette beyond wood- and stone-inspired looks to abstracts, geometric shapes and solid colors.



■ Indigo SP720 | Zinc SP722 | Contarini SP734

Opus	Gluedown
Plank Size	48.0" x 9.0"   36.0" x 6.0"   36.0" x 4.0"
Tile Size	3.0" x 18.0"   18.0" x 18.0" 18.0" x 24.0"   18.0" x 36.0"   24.0" x 24.0"
Abstract Sizes	18.0" x 24.0"   6.0" x 36.0" 18.0" x 36.0"   9.0" x 9.0"   12.0" x 12.0"
Wear Layer	20mil
Thickness	2.5mm
Commercial Warranty	15 years
Product Code	Begins with WP   SP   SM-SP   CLIF   MAYF

	Standard	Gluedown
<b>Size</b>	ASTM F2421	See Product Listings
<b>Thickness</b>	ASTM F386	2.5 mm
<b>Wear layer</b>	ASTM F410	20 mil (0.50 mm)
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Commercial	15 years
<b>Beveled edge</b>		Micro
<b>Classification</b>	ASTM F1700	Class III Type B
<b>Reaction to fire</b>	ASTM E648-06	Class 1
<b>Smoke density</b>	ASTM E662-06	Pass (< 450)
<b>Flammability test</b>	FF 1-70; Federal Approved	Pass
<b>Slip resistance<sup>2</sup></b>	ASTM D2047	Pass (Dry 0.89)
<b>Light fastness</b>	ASTM F1515	Pass ΔE = 5.0
<b>Abrasion resistance</b>	ASTM D3884	124,000 Cycles
<b>Dimensional stability</b>	ASTM F2199	Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB IIC = 44 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
<b>Static load</b>	ASTM F970	2,000 psi
<b>Flexibility</b>	ASTM F137	Pass
<b>Adhesive</b>		DrySet K-Spray Karndean Epoxy K99 HM
<b>Environmental</b>	Indoor Air Comfort Floorscore SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF/ANSI 332 ISO 14001 / ISO 9001	Gold certification compliant low-emitting VOCs. Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standards
<b>Recycling</b>		Suitable
<b>Phthalate free</b>	CPSC-C1001-09.3	Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Opus Wood Designs

Gluedown: 36.0" x 4.0"  
(36ft<sup>2</sup> per box)

Gluedown: 48.0" x 9.0" (36ft<sup>2</sup> per box)



Weathered Elm  
Gluedown **WP511**



Rhine Oak  
Gluedown **WP432**



Niveus  
Gluedown **WP411**



Mosel Oak  
Gluedown **WP430**



Vermeer Oak  
Gluedown **WP427**



Available in a gluedown installation format.



Bronze Teak  
Gluedown **WP433**



Barolo Oak  
Gluedown **WP429**



Leyster Oak  
Gluedown **WP425**



Steen Oak  
Gluedown **WP426**



Magna  
Gluedown **WP413**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Wood Designs

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box)



Grano  
Gluedown **WP311**



Bleached Grey Walnut  
Gluedown **WP329**



Washed Walnut  
Gluedown **WP328**



Ignea  
Gluedown **WP313**



Canitia  
Gluedown **WP322**



Available in a gluedown installation format.



Arrado  
Gluedown **WP325**



Rubra  
Gluedown **WP316**



Natural Walnut  
Gluedown **WP326**



Tenebra Walnut  
Gluedown **WP330**



Carbo  
Gluedown **WP318**

**Disclaimer: color and pattern reproduction**


Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Stone Designs

Gluedown: 24.0" x 24.0" (40ft<sup>2</sup> per box)



Sillano Marble  
Gluedown **SP816**

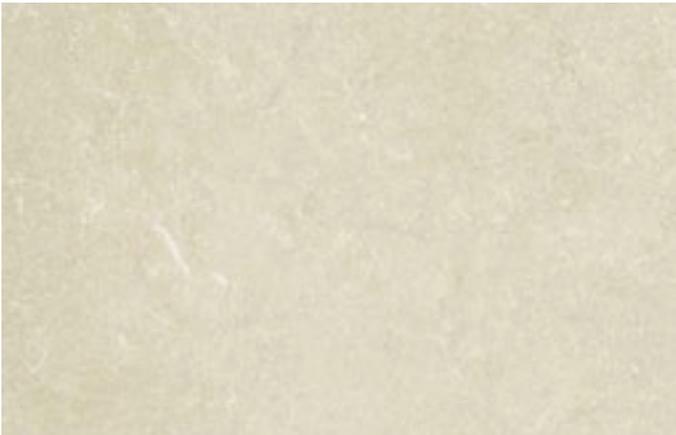

Toledo  
Gluedown **SP811**



Pamplona  
Gluedown **SP812**

Gluedown: 18.0" x 24.0" (36ft<sup>2</sup> per box)



Terra  
Gluedown **SP212**



Urbus  
Gluedown **SP213**




Fumo  
Gluedown **SP216**



Available in a gluedown installation format.

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)

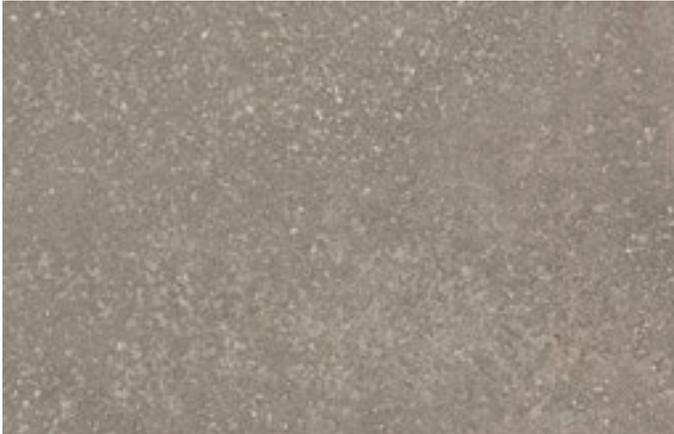


Clarus  
Gluedown **SP714**

Gluedown: 18.0" x 18.0" (36ft<sup>2</sup> per box)



Nero  
Gluedown **SP115**

Gluedown: 3.0" x 18.0" (36ft<sup>2</sup> per box)

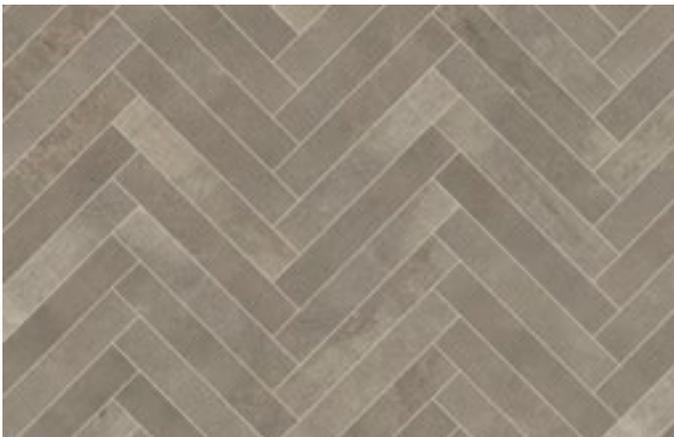

Fumo - Accent Plank  
Gluedown **SM-SP216**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Abstract Designs

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box)



Zinc  
Gluedown **SP722**



Chalk Grey  
Gluedown **SP724**



Yellow Ochre  
Gluedown **SP726**



Burnt Sienna  
Gluedown **SP719**



Olive  
Gluedown **SP740**



Available in a gluedown installation format.



Indigo  
Gluedown **SP720**



Black Iron  
Gluedown **SP727**




■ Toledo **SP811** | Burnt Sienna **SP719** | Indigo **SP720** | Olive **SP740**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Abstract Designs

Gluedown: 18.0" x 18.0" (36ft<sup>2</sup> per box)

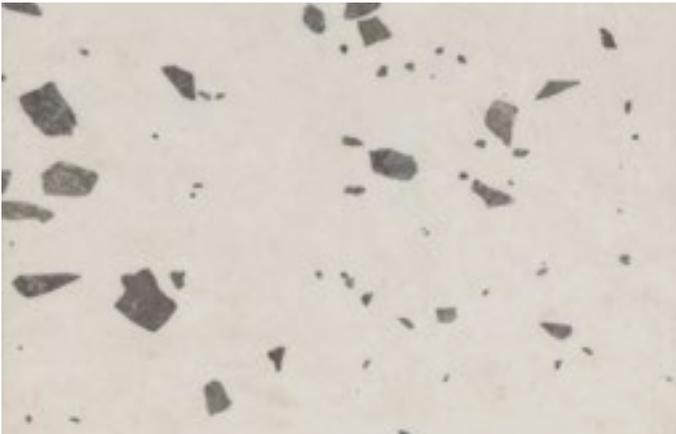

Noale  
Gluedown **SP116**

Gluedown: 18.0" x 24.0" (36ft<sup>2</sup> per box)



Casablanca  
Gluedown **SP219**



Salute Grigio  
Gluedown **SP118**



Luca  
Gluedown **SP117**



Available in a gluedown installation format.

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)



Leoncini  
Gluedown **SP730**



Stratus  
Gluedown **SP731**



San Marco  
Gluedown **SP729**



Umbra  
Gluedown **SP732**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Opus Abstract Designs

Gluedown: 18.0" x 36.0" (36ft<sup>2</sup> per box)



Zinc  
Gluedown **SP723**



Chalk Grey  
Gluedown **SP725**



Albertina  
Gluedown **SP733**



Black Iron  
Gluedown **SP728**



Tizina  
Gluedown **SP735**



Contarini  
Gluedown **SP734**




Available in a gluedown installation format.


# Heritage Collection

Using geometric patterns to create bold, sophisticated looks, the Heritage Collection offers the classic elegance of traditional English architectural styles. For details, contact your Karndean representative.

Gluedown: 12.0" x 12.0" (16ft<sup>2</sup> per box)

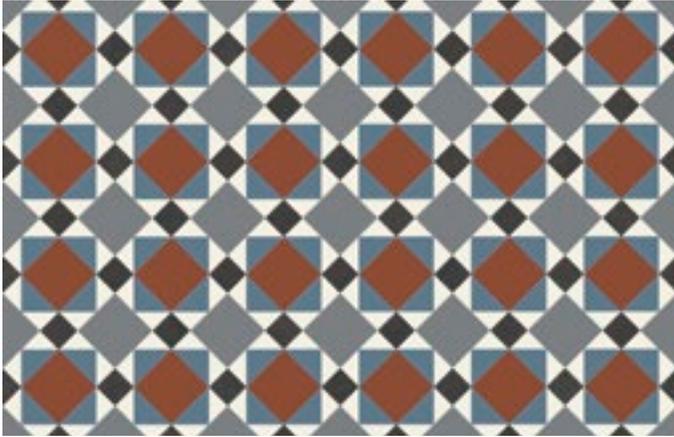


Mayfair  
Gluedown **MAYF-01**

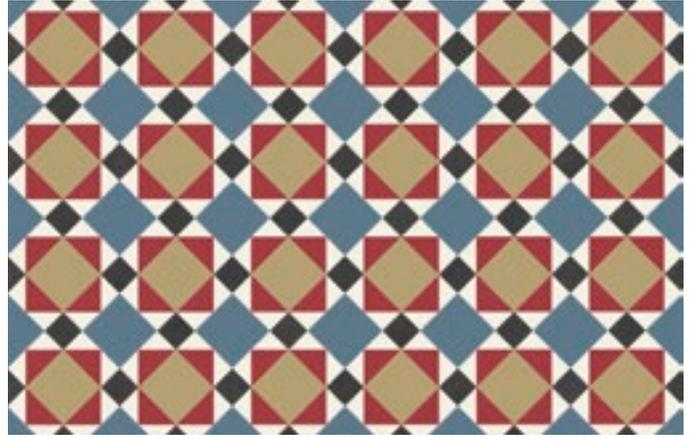

Mayfair  
Gluedown **MAYF-02**

Gluedown: 9.0" x 9.0"\* (18ft<sup>2</sup> per box)

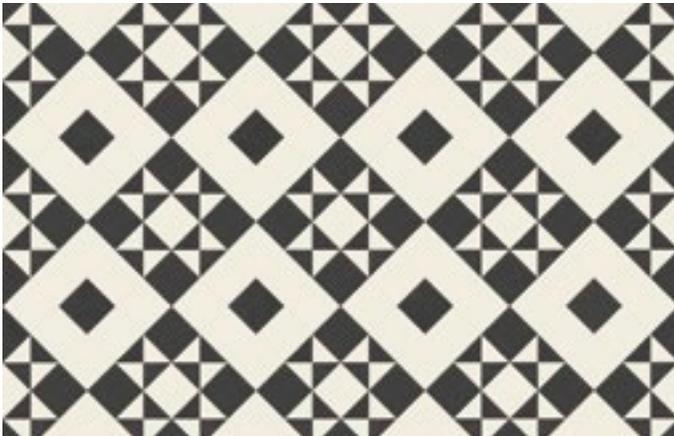


Clifton  
Gluedown **CLIF-01**




Clifton  
Gluedown **CLIF-04**

Gluedown: 12.0" x 12.0"



Gluedown: 9.0" x 9.0" \*



Heritage Collection tiles have standard beveled edges.


\*Two different square tiles (represented in the line drawings) are used to form the Clifton designs (CLIF-01 and CLIF-04). Orders arrive in the form of the individual square tiles, which are then laid together to form the Clifton designs.

### Disclaimer: color and pattern reproduction

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Knight Tile

Oak and pine to limestone and marble, the Knight Tile collection features stylish wood- and stone-inspired designs in a variety of colors. Each design is available in both gluedown and rigid core for installation.

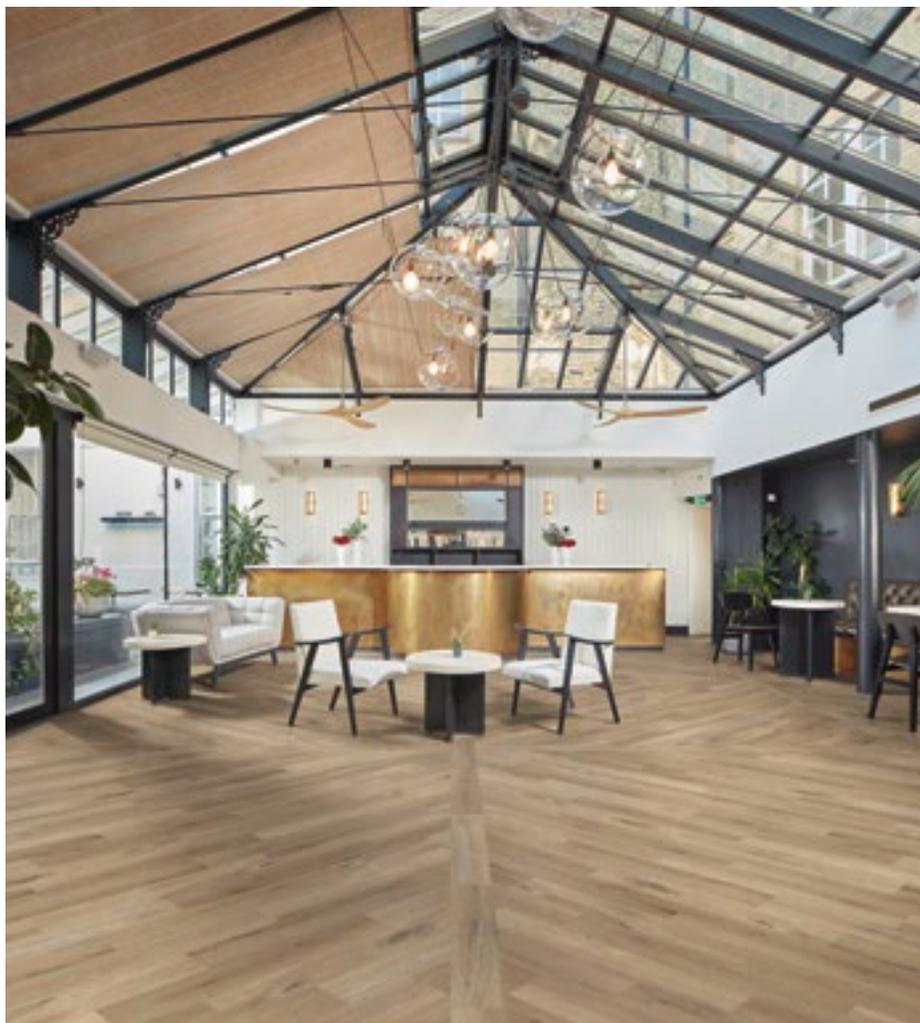

■ Washed Character Oak **KPI44** | **SCB-KPI44-6**

Gluedown	Knight Tile	Rigid Core
36.0" x 6.0"   48.0" x 9.0"	Plank Size	36.0" x 5.91"   48.03" x 8.86"
12.0" x 18.0"	Tile Size	12.0" x 18.0"
12mil	Wear Layer	12mil
2mm	Thickness	4.5mm
10 years	Commercial Warranty	10 years
Begins with KP   CH-KP   ST	Product Code	Begins with SCB

	Standard	Gluedown	Rigid Core
<b>Size</b>	ASTM F2421	See Product Listing	See Product Listing
<b>Thickness</b>	ASTM F386 ASTM F387	2.0 mm N/A	N/A 4.5 mm
<b>Locking system<sup>1</sup></b>			2G™ angling installation system
<b>Wear layer</b>	ASTM F410	12 mil (0.30 mm)	12 mil (0.30 mm)
<b>Surface treatment</b>		K-Guard+® PU coating	K-Guard+® PU coating
<b>Warranty<sup>2</sup></b>	Commercial	10 Years	10 Years
<b>Beveled edge</b>		No	No
<b>Classification</b>		ASTM F1700: Class III Type B	ASTM F3261: Resilient flooring with Rigid Polymeric Core
<b>Reaction to fire</b>	ASTM E648-06	Class 1	Class 1
<b>Smoke density</b>	ASTM E662-06	Pass (< 450)	Pass (< 450)
<b>Flammability test</b>	ASTM D2859	Pass	Pass
<b>Slip resistance<sup>3</sup></b>	ASTM D2047	Pass (Dry 0.91)	Pass (Dry 0.64)
<b>Staining resistance</b>	ASTM F925	Pass	Pass
<b>Heat fastness</b>	ASTM F1514	Pass	Pass
<b>Light fastness</b>	ASTM F1515	Pass	Pass
<b>Abrasion resistance</b>	ASTM D3884 ASTM D4060	Pass (16,000 Cycles) N/A	N/A Pass (14,000 Cycles)
<b>Dimensional stability</b>	ASTM F2199 ISO 23999	Pass N/A	N/A Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB IIC = 43 dB (6" Concrete Slab w/Drop Ceiling) IIC = 70 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC = 22 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 69 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
<b>Static load</b>	ASTM F970	Pass (1500 psi at 0.005")	Pass (700 psi at 0.005")
<b>Indentation - residual</b>	ASTM F1914	Pass	Pass
<b>Thickness swell</b>	NALFA 3.2	N/A	Pass (Class 4)
<b>Flexibility</b>	ASTM F137	Pass	N/A
<b>Adhesive</b>		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our instructions.
<b>Environmental</b>	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332  ISO 14001 / ISO 9001  ASSURE CERTIFIED™	Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; compliant low-emitting VOCs. N/A  N/A  Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
<b>Recycling</b>		Suitable	Suitable
<b>Phthalate free</b>	CPSC-C1001-09.3	Yes	Yes

<sup>1</sup> 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

<sup>2</sup> Subject to terms. Please see our website.

<sup>3</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Knight Tile **Wood Designs**

Gluedown: 48.0" x 9.0" (36ft<sup>2</sup> per box) | Rigid Core: 48.03" x 8.86" (29.55ft<sup>2</sup> per box)



Pale Limed Oak - Chevron Plank  
Gluedown **CH-KP94** | Rigid Core **SCB-CH-KP94**  
Image of full-sized plank on page 73



Mid Limed Oak - Chevron Plank  
Gluedown **CH-KP96** | Rigid Core **SCB-CH-KP96**  
Image of full-sized plank on page 73



■ Mid Limed Oak **CH-KP96** | **SCB-CH-KP96**

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box)  
Rigid Core: 36.0" x 5.91" (29.53ft<sup>2</sup> per box)



Meadow Cherry  
Gluedown **KP158**  
Rigid Core **SCB-KP158-6**



Natural Character Oak  
Gluedown **KP145**  
Rigid Core **SCB-KP145-6**



Available in gluedown and rigid core installation formats.



Pale Limed Oak  
Gluedown **KP94**  
Rigid Core **SCB-KP94-6**



Honey Limed Oak  
Gluedown **KP155**  
Rigid Core **SCB-KP155-6**



Classic Limed Oak  
Gluedown **KP97**  
Rigid Core **SCB-KP97-6**



Russet Character Oak  
Gluedown **KP163**  
Rigid Core **SCB-KP163-6**



Mid Limed Oak  
Gluedown **KP96**  
Rigid Core **SCB-KP96-6**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Knight Tile **Wood Designs**

Gluedown: 36.0" x 6.0" (36ft<sup>2</sup> per box) | Rigid Core: 36.0" x 5.91" (29.53ft<sup>2</sup> per box)



White Painted Pine  
Gluedown **KP105**  
Rigid Core **SCB-KP105-6**



Natural Scandi Pine  
Gluedown **KP133**  
Rigid Core **SCB-KP133-6**



Dutch Limed Oak  
Gluedown **KP154**  
Rigid Core **SCB-KP154-6**



Norfolk Acacia  
Gluedown **KP159**  
Rigid Core **SCB-KP159-6**



Washed Character Oak  
Gluedown **KP144**  
Rigid Core **SCB-KP144-6**



Available in gluedown and rigid core installation formats.



Lime Washed Oak  
Gluedown **KP99**  
Rigid Core **SCB-KP99-6**



Grey Limed Oak  
Gluedown **KP138**  
Rigid Core **SCB-KP138-6**



■ Dutch Limed Oak **KP154 | SCB-KP154-6**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Knight Tile **Stone Designs**


Gluedown: 12.0" x 18.0" (36ft<sup>2</sup> per box) | Rigid Core: 12.0" x 18.0" (30ft<sup>2</sup> per box)



Honed Oyster Slate  
Gluedown **ST17**  
Rigid Core **SCB-ST17-G**




Olten Stone  
Gluedown **ST24**  
Rigid Core **SCB-ST24-G**

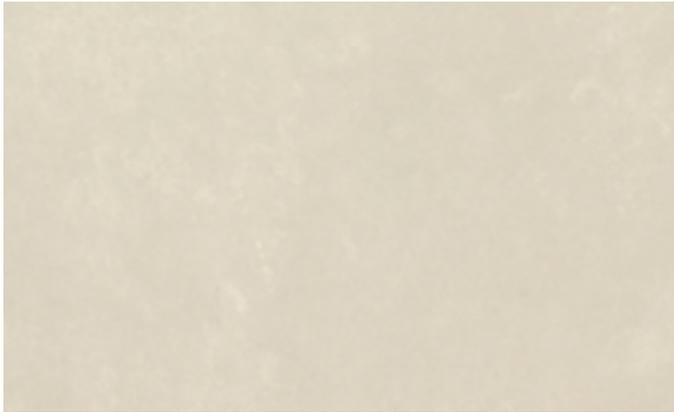

Ivory Riven Slate  
Gluedown **ST18**  
Rigid Core **SCB-ST18-G**



Grey Riven Slate  
Gluedown **ST16**  
Rigid Core **SCB-ST16-G**

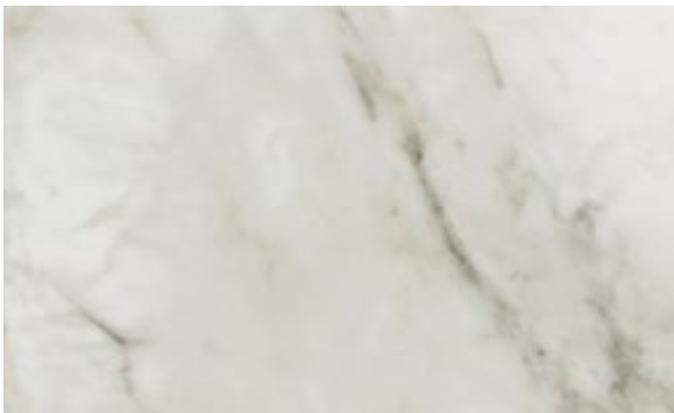

River Marble  
Gluedown **ST31**  
Rigid Core **SCB-ST31-G**



Bern Stone  
Gluedown **ST30**  
Rigid Core **SCB-ST30-G**



Available in gluedown and rigid core installation formats.




Natural Limestone  
Gluedown **ST33**  
Rigid Core **SCB-ST33-G**




Soapstone  
Gluedown **ST5-18**  
Rigid Core **SCB-ST5-G**



Portland Stone  
Gluedown **ST13**  
Rigid Core **SCB-ST13-G**

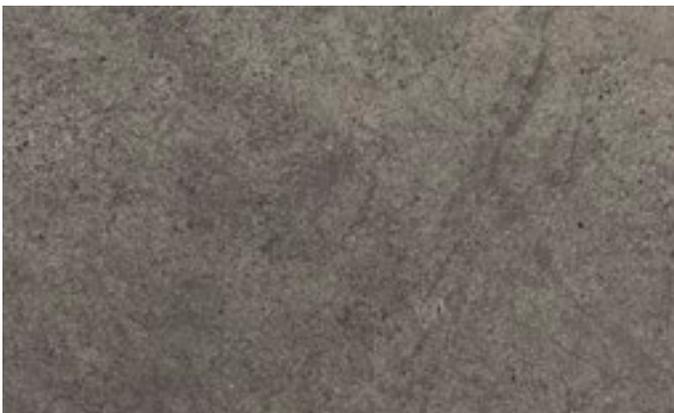

Cumbrian Stone  
Gluedown **ST14**  
Rigid Core **SCB-ST14-G**

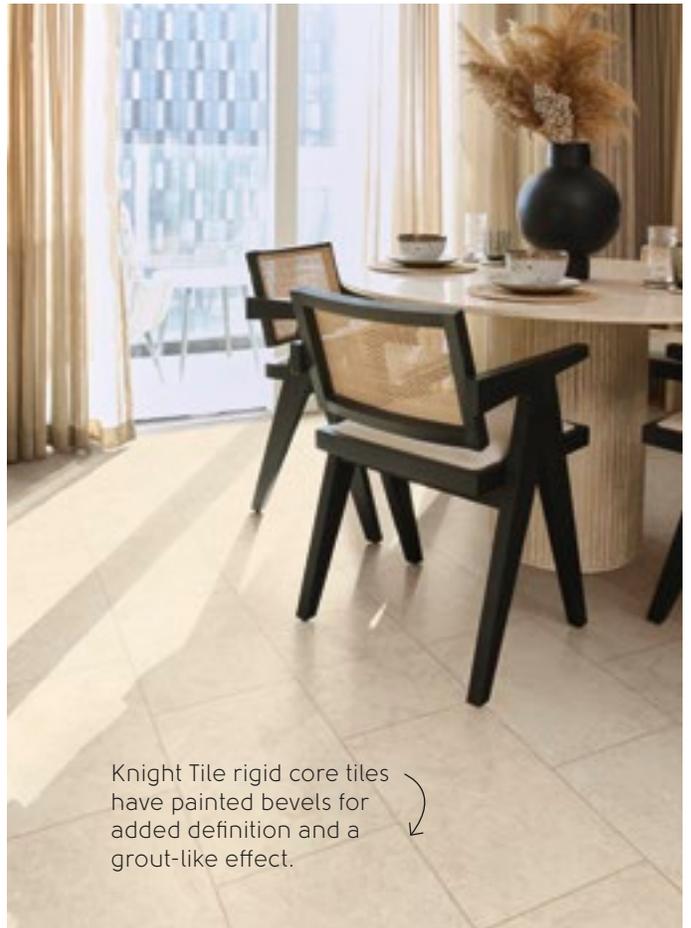

Knight Tile rigid core tiles have painted bevels for added definition and a grout-like effect.

■ Natural Limestone **ST33** | **SCB-ST33-G**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay

Offering both wood- and stone-inspired designs, our LooseLay collection combines the best features of two installation formats, glued-down and non-adhesive “floating floors.” It can be cut and laid in custom patterns, like glued-down, while offering faster, easier installation – only minimal adhesive and subfloor prep are needed.\*

It’s all possible because of our K-Wave® friction-grip backing, which keeps pieces firmly in place with the added benefit of reducing noise to lower floors. SureFit™ technology gives the flooring extra dimensional stability, eliminating the need for expansion gaps and transition strips.

At 4.5 mm thick, LooseLay transitions easily to most carpet tile.

\*Note: LooseLay can be fully glued down if preferred.



■ Swan Bay Ash LLP361

Wood Designs	LooseLay Specs	Stone Designs
41.34" x 9.84" 59.06" x 9.84"	Sizes	18.0" x 36.0" 19.69" x 24.02" 23.62" x 23.62"
33.91   32.29	ft <sup>2</sup> Per Box	27.0   32.83   31.0
20 mil	Wear Layer	20 mil
4.5 mm	Thickness	4.5 mm
15 Years	Commercial Warranty	15 Years
Begins with LLP	Product Code	Begins with LLT

	Standard	Loose Lay
<b>Size</b>	ASTM F2421	See Product Listing
<b>Thickness</b>	ASTM F386	4.5 mm
<b>Wear layer</b>	ASTM F410	20 mil (0.50 mm)
<b>Surface treatment</b>		K-Guard+® PU coating
<b>Warranty<sup>1</sup></b>	Commercial	15 years
<b>Beveled edge</b>		No
<b>Classification</b>	ASTM F1700	Class III Type B
<b>Reaction to fire</b>	ASTM E648-06	Class 1
<b>Staining resistance</b>	ASTM F925	Pass
<b>Smoke density</b>	ASTM E662-06	Pass (< 450)
<b>Flammability test</b>	FF 1-70; Federal Approved	Pass
<b>Slip resistance<sup>2</sup></b>	ASTM D2047	Dry 0.92
<b>Light fastness</b>	ASTM F1515	Pass $\Delta E = 1.7$
<b>Abrasion resistance</b>	ASTM D3884	113,000 Cycles
<b>Dimensional stability</b>	ASTM F2199	Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 16$ dB IIC = 56 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
<b>Static load</b>	ASTM F970	1,000 psi
<b>Flexibility</b>	ASTM F137	Pass
<b>Electrostatic propensity</b>	AATCC 134-1996	Pass
<b>Indentation - residual</b>	ASTM F1914	Pass
<b>Adhesive</b>	Please refer to our installation instructions.	
<b>Environmental</b>	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ISO 14001 / ISO 9001	Indoor air quality certified; compliant low-emitting VOCs. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards
<b>Recycling</b>		Suitable
<b>Phthalate free</b>	CPSC-C1001-09.3	Yes

<sup>1</sup> Subject to terms. Please see our website.

<sup>2</sup> Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Karndean LooseLay **Wood Designs**

Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Field Oak  
Loose Lay **LLP356**



Nude Danish Oak  
Loose Lay **LLP358**



Champagne Oak  
Loose Lay **LLP310**



Lemon Spotted Gum  
Loose Lay **LLP317**



Bernina Swiss Elm  
Loose Lay **LLP374**



Available in a loose lay installation format.



Reclaimed Heart Pine  
Loose Lay **LLP305**



Golden Danish Oak  
Loose Lay **LLP359**



Character Walnut  
Loose Lay **LLP315**



Antique Heart Pine  
Loose Lay **LLP303**



Koa Kai  
Loose Lay **LLP372**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay **Wood Designs**

Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Pure Danish Oak  
Loose Lay **LLP357**



Pearl Oak  
Loose Lay **LLP306**



Pale Swiss Elm  
Loose Lay **LLP373**



Worn Fabric Oak  
Loose Lay **LLP330**



Wheat Oak  
Loose Lay **LLP355**



Available in a loose lay installation format.



Neutral Oak  
Loose Lay **LLP307**



Taupe Oak  
Loose Lay **LLP309**



Shorebird Ash  
Loose Lay **LLP360**



■ Neutral Oak **LLP307**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay **Wood Designs**

Loose Lay: 59.06" x 9.84" (32.29ft<sup>2</sup> per box)



Cashmere Oak  
Loose Lay **LLP353**



Sterling Oak  
Loose Lay **LLP354**



French Grey Oak  
Loose Lay **LLP308**



Swan Bay Ash  
Loose Lay **LLP361**



Twilight Oak  
Loose Lay **LLP301**



Available in a loose lay installation format.



■ French Grey Oak LLP308

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay **Wood Designs**

Loose Lay: 41.34" x 9.84" (33.90ft<sup>2</sup> per box)



Bridgeport  
Loose Lay **LLP157**



Ashland  
Loose Lay **LLP95**



Country Oak  
Loose Lay **LLP92**



Cambridge  
Loose Lay **LLP113**



Antique Karri  
Loose Lay **LLP39**



Available in a loose lay installation format.



Danbury  
Loose Lay **LLP154**



Stamford  
Loose Lay **LLP109**



Boston  
Loose Lay **LLP111**



Hartford  
Loose Lay **LLP112**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay Stone Designs

Loose Lay: 19.69" x 24.02" (32.83ft<sup>2</sup> per box)



Indiana  
Loose Lay **LLT202**



Colorado  
Loose Lay **LLT201**



Dakota  
Loose Lay **LLT212**



Vulcano  
Loose Lay **LLT211**



Available in a looselay installation format.

Loose Lay: 18.0" x 36.0" (27.00ft<sup>2</sup> per box)




Champara Travertine  
Loose Lay **LLT226**



Andean Travertine  
Loose Lay **LLT224**



Altura Travertine  
Loose Lay **LLT225**

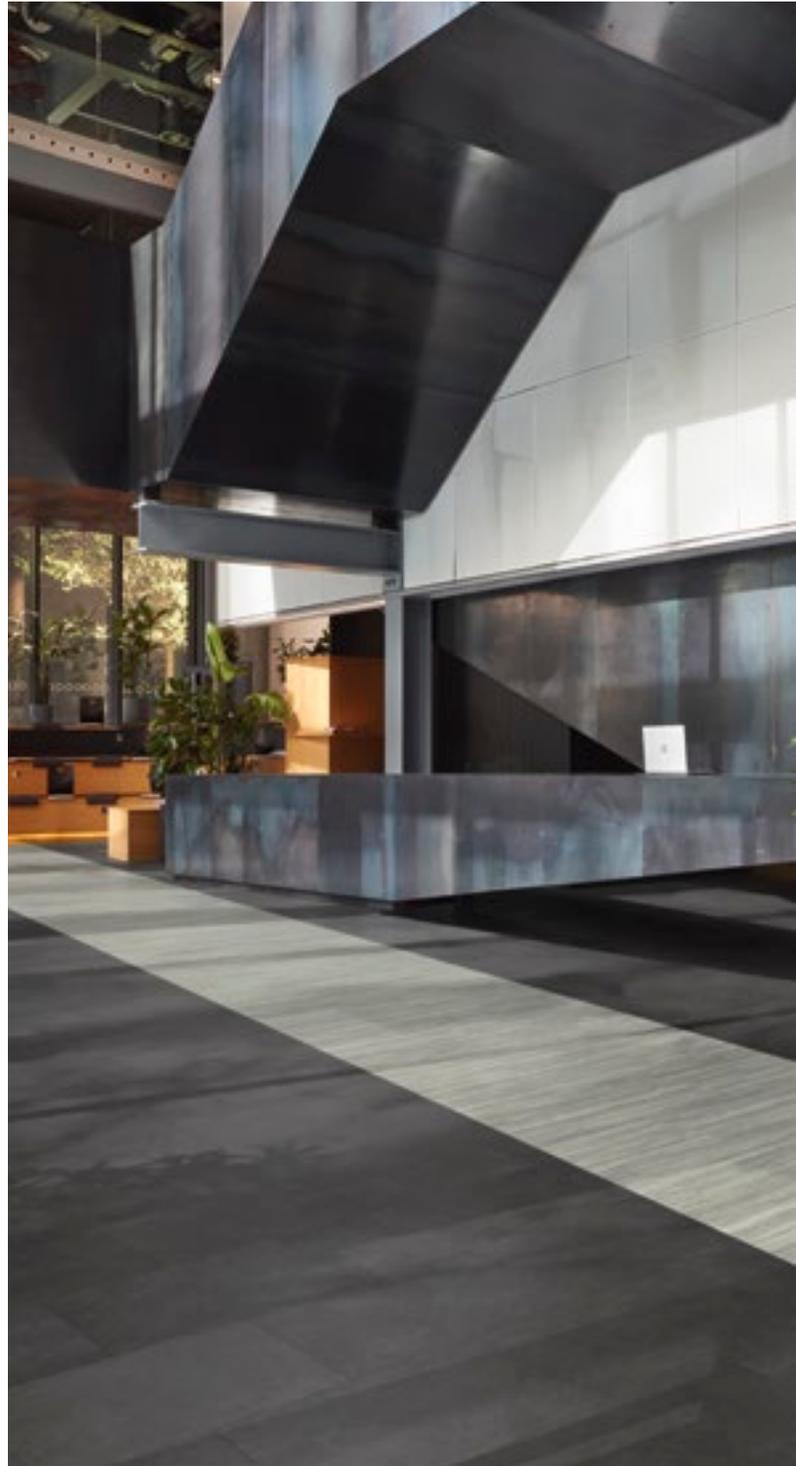

■ Vulcano **LLT211** | Altura Travertine **LLT225**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Karndean LooseLay Stone Designs

Loose Lay: 23.62" x 23.62" (31ft<sup>2</sup> per box)



Dolce Terrazzo  
Loose Lay **LLT220**



Tranquilla Terrazzo  
Loose Lay **LLT221**



Notte Terrazzo  
Loose Lay **LLT222**



Corsini Marble  
Loose Lay **LLT223**



Available in a looselay installation format.



■ Corsini Marble LLT223

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select

Stylish Korlok Select designs are inspired by wood and stone from around the world – a koa tree in Hawaii to marble from an Italian mountain quarry.

Offering fast, easy installation, Korlok Select is a rigid core product that clicks and locks in place, without the need for adhesive, and can be installed over most hard subfloors, facilitating quicker turnaround. In addition, a sound-absorbing foam backing creates quieter environments, reducing noise to lower floors by 22 dB.



Ivory Brushed Oak RKP8217



## 5G® Locking Mechanism

Korlok Select can be installed with confidence. Backed by our HoldFast™ 15-year warranty, the 5G® locking mechanism securely locks pieces at the end seams with a single click.

## InteGrout®

Korlok Select stone designs include InteGrout®, a nonporous, stain-resistant feature seamlessly integrated with the tiles. InteGrout® provides the realistic look of grout while eliminating the time (and mess) associated with using the real thing during installation.

Wood Designs	Korlok Select	Stone Designs
55.91" x 8.86"   23.46" x 5.87"	Sizes	17.99" x 36.81"   17.99" x 23.62" 5.87" x 23.46"
20 mil	Wear Layer	20 mil
4.5 mm	Thickness	4.5 mm
15 Years	Commercial Warranty	15 Years
Begins with RKP   SM-RKP	Product Code	Begins with RKT   SM-RKT

	Standard	Rigid Core
Size	ASTM F2421	See Product Listing
Thickness	ASTM F387	6.5 mm
Locking system <sup>1</sup>		5G <sup>®</sup> Fold Down installation system <sup>2</sup> 
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+ <sup>®</sup> PU coating
Warranty <sup>2</sup>	Commercial	15 years
Beveled edge		Micro
Standards	ASTM F3261	Pass: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Flammability	ASTM D2859	Pass
Slip resistance <sup>3</sup>	ASTM D2047	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass (No change)
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134-1996	1.6 kV
Abrasion resistance	ASTM D4060	Pass (36,000 Cycles)
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static Load	ASTM F970	Pass (800 psi at 0.005")
Indentation - residual	ASTM F1914	Pass (2.3%)
Thickness swell	NALFA 3.2	Pass (Class 4)
Thermal resistance	ISO 8302	0.052 m <sup>2</sup> K/W Suitable for underfloor heating. Max 81°F
Adhesive	None required; please install according to our instructions.	
Environmental	FloorScore <sup>®</sup> SCS-EC10.3-2014 v4.0	Indoor air quality certified; compliant low-emitting VOCs
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF / ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Silver certified product
	ASSURE CERTIFIED™	Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free	CPSC-C1001-09.3	Yes

1 5G<sup>®</sup> is a patented technology invented by Välinge Innovation AB. The 5G<sup>®</sup> word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 5G<sup>®</sup> along short edge; 2G™ long edge except SM-RKP8105, SM-RKP8116, SM-RKP8208, SM-RKP8209, SM-RKP8211, SM-RKT3012-G and SM-RKT3013-G which are modified 2G™ on short edge and standard 2G™ on long edge.

3 Subject to terms. Please see our website.

4 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

# Korlok Select **Wood Designs**


Rigid Core: 23.46" x 5.87" (21.03ft<sup>2</sup> per box)



Texas White Ash - Accent Plank  
Rigid Core **SM-RKP8105**  
Image of full-sized plank on page 98



Canadian Urban Oak - Accent Plank  
Rigid Core **SM-RKP8116**  
Image of full-sized plank on page 96

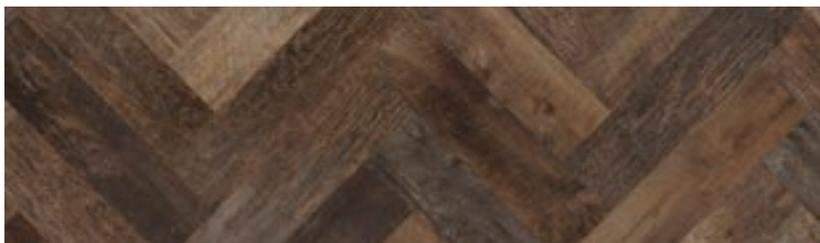

Salvaged Barnwood - Accent Plank  
Rigid Core **SM-RKP8209**  
Image of full-sized plank on page 95



■ Salvaged Barnwood **SM-RKP8209**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Glenmore Oak  
Rigid Core **RKP8237**



Braemar Oak  
Rigid Core **RKP8238**



Available in a rigid core installation format.



Kilauea Koa  
Rigid Core **RKP8124**



Natural Koa  
Rigid Core **RKP8122**



Salvaged Barnwood  
Rigid Core **RKP8209**



Cathedral Oak  
Rigid Core **RKP8114**



Antique French Oak  
Rigid Core **RKP8110**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select **Wood Designs**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Washed Butternut  
Rigid Core **RKP8108**



Canadian Urban Oak  
Rigid Core **RKP8116**



Smoked Butternut  
Rigid Core **RKP8107**



Washed Velvet Ash  
Rigid Core **RKP8102**



Reclaimed French Oak  
Rigid Core **RKP8109**



Available in a rigid core installation format.



Warm Ash  
Rigid Core **RKP8103**



River Hickory  
Rigid Core **RKP8250**



Barley Oak  
Rigid Core **RKP8206**



Baltic Limed Oak  
Rigid Core **RKP8111**



Warm Brushed Oak  
Rigid Core **RKP8215**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select **Wood Designs**

Rigid Core: 55.91" x 8.86" (34.39ft<sup>2</sup> per box)



Ivory Brushed Oak  
Rigid Core **RKP8217**



Canyon Hickory  
Rigid Core **RKP8249**



Texas White Ash  
Rigid Core **RKP8105**



Baltic Coastal Oak  
Rigid Core **RKP8236**



Baltic Washed Oak  
Rigid Core **RKP8101**



Available in a rigid core installation format.



Washed Grey Ash  
Rigid Core **RKP8104**



Grey Loire Oak  
Rigid Core **RKP8244**



■ Texas White Ash **SM-RKP8105**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select Stone Designs

Rigid Core: 17.99" x 36.81" (27.60ft<sup>2</sup> per box)



Tortora Breccia Marble  
Rigid Core **RKT3018-G**



Bianco Breccia Marble  
Rigid Core **RKT3021-G**



Nonporous, stain-resistant  
InteGrout<sup>®</sup>

■ Tortora Breccia Marble **RKT3018-G**



Available in a rigid core installation format.

Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)



Brunella Marble  
Rigid Core **RKT3013-G**

Rigid Core: 5.87" x 23.46" (21.03ft<sup>2</sup> per box)



Brunella Marble - Accent Plank  
Rigid Core **SM-RKT3013-G**



■ Brunella Marble **SM-RKT3013-G**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Select Stone Designs

Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)



Arctic Mist  
Rigid Core **RKT3005-G**



Cotswold Stone  
Rigid Core **RKT2405-G**



Sandstorm  
Rigid Core **RKT3010-G**



Aged Parchment  
Rigid Core **RKT3011-G**



Mountain Slate  
Rigid Core **RKT3003-G**



Antique Copper  
Rigid Core **RKT3002-G**



Available in a rigid core installation format.

Rigid Core: 17.99" x 23.62" (29.51ft<sup>2</sup> per box)



Coastal Fog  
Rigid Core **RKT3004-G**



Grey Castello Marble  
Rigid Core **RKT2417-G**



Bronze Castello Marble  
Rigid Core **RKT2416-G**



Volcanic Slate  
Rigid Core **RKT3001-G**



Oxford Grey  
Rigid Core **RKT3008-G**



Black Sands  
Rigid Core **RKT3006-G**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Reserve

Oak, elm, maple and more - the Korlok Reserve collection features designs inspired by a variety of wood species, with the natural character enhanced through techniques such as oiling, liming and fuming.

All Korlok Reserve designs are in a rigid core format for fast, easy installation. Planks click and lock together, without the need for adhesive, and can be installed over most hard subfloors with minimal prep, facilitating quicker turnaround. In addition, a sound-absorbing foam backing creates quieter environments, reducing noise to lower floors by 21 dB.



■ Millstone Sycamore RCP6546

Korlok Reserve	Rigid Core
Plank Size	48.03" x 7.05"
Wear Layer	20mil
Thickness	6.5mm
Commercial Warranty	15 years
Product Code	Begins with RCP

	Standard	Rigid Core
Size	ASTM F2421	See Product Listing
Thickness	ASTM F387	6.5 mm
Locking system <sup>1</sup>		2G™ angling installation system
Wear layer	ASTM F410	20 mil (0.50 mm)
Surface treatment		K-Guard+® PU coating
Warranty <sup>2</sup>	Commercial	15 years
Beveled edge		Micro
Standards	ASTM F3261	Pass: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class I
Flammability	FF 1-70; Federal Approval	Pass
Slip resistance <sup>4</sup>	ASTM D2047	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass (No change)
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134-1996	-1.4 kV
Abrasion resistance	ASTM D4060	Pass (20,000 Cycles)
Dimensional stability	ASTM F2199	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 21 dB IIC = 69 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static Load	ASTM F970	Pass (650 psi at 0.005")
Indentation - residual	ASTM F1914	Pass
Thickness swell	NALFA 3.2	Pass (Class 4)
Thermal resistance	ISO 8302	0.052 m <sup>2</sup> K/W Suitable for underfloor heating. Max 81°F
Adhesive	None required; please install according to our installation instructions.	
Environmental	FloorScore® SCS-EC10.3-2014 v4.0	Indoor air quality certified; compliant low-emitting VOCs.
	Environmental Product Declaration	External third-party verified Type III EPD
	NSF / ANSI 332	Sustainability Assessment for Resilient Floor Coverings; Silver certified product
	ASSURE CERTIFIED™	Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
	ISO 14001 / ISO 9001	Manufactured to quality and environment management systems standards
Recycling		Suitable
Phthalate free	CPSC-C1001-09.3	Yes

1 2G™ is a patented technology invented by Välinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

2 Subject to terms.

3 Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values

# Korlok Reserve **Wood Designs**

Rigid Core: 48.03" x 7.05" (23.51ft<sup>2</sup> per box)



Millstone Sycamore  
Rigid Core **RCP6546**



Natural Red Oak  
Rigid Core **RCP6552**



Natural Oiled Oak  
Rigid Core **RCP6536**



North American Oak  
Rigid Core **RCP6533**



Vintage Oregon Oak  
Rigid Core **RCP6531**



Available in a rigid core installation format.



Marron Elm  
Rigid Core **RCP6543**

■ Marron Elm **RCP6543**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# Korlok Reserve **Wood Designs**


Rigid Core: 48.03" x 7.05" (23.51ft<sup>2</sup> per box)



Limed Coastal Oak  
Rigid Core **RCP6534**



Ghost Elm  
Rigid Core **RCP6544**

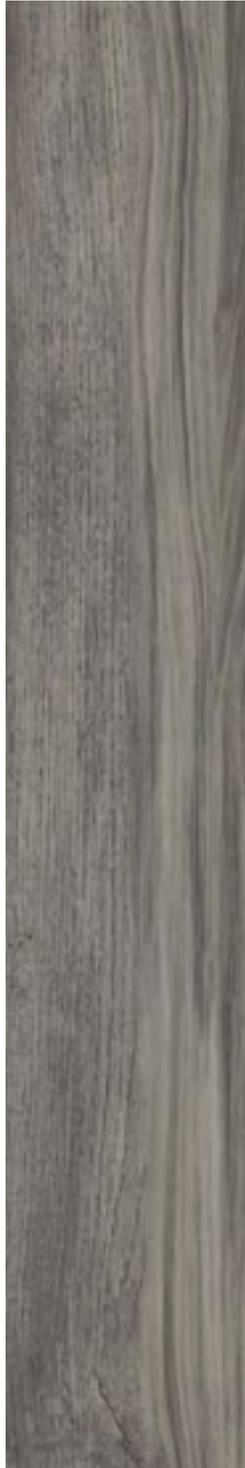

Grey Oiled Oak  
Rigid Core **RCP6541**



Aged Spanish Oak  
Rigid Core **RCP6535**



Smoked American Maple  
Rigid Core **RCP6545**



Available in a rigid core installation format.



Medina Weathered Oak  
Rigid Core **RCP6553**



■ Aged Spanish Oak **RCP6535**

**Disclaimer: color and pattern reproduction**

Because of the printing process, images and photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

# design solutions

## Emblems and Logos


Customize your installation with an emblem or logo. For more information, contact your Karndean representative, or call customer service at 888-266-4343.




**Cartwheel with border** 36" x 36"



**Cartwheel** 36" diameter

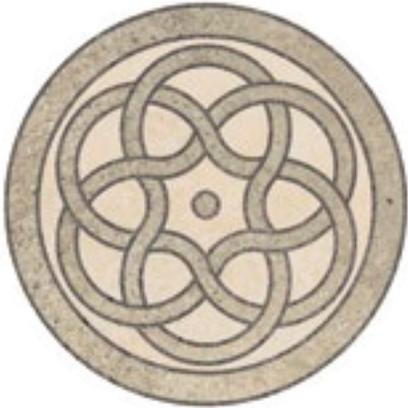


**Celtic** 36" diameter

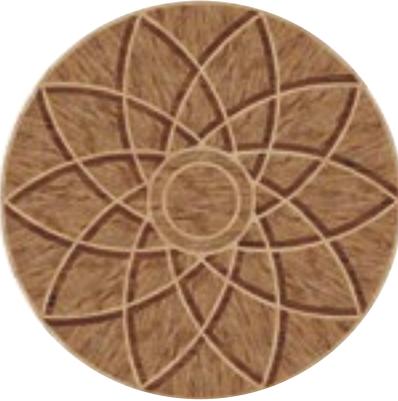

**Galaxy** 36" diameter



**Star** 36" diameter

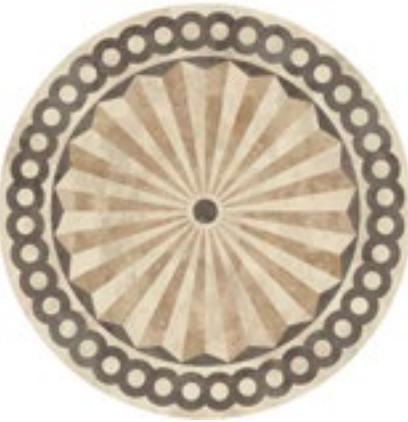

**Nexus** 33" diameter






**Please note:** Orders for custom features must be confirmed with customer signature before processing begins. The appearance of the natural characteristics that inspire our products may be present in custom flooring and cannot be used as the basis for returns.

Create an installation completely unique to the aesthetic and functional needs of your project. With complementary luxury vinyl elements such as design strips, grout strips, borders and solid colors, the possibilities are endless.


# Solid Colors

Use solid colors for zoning, wayfinding or simply as a complementary element in the design of your space. Solid colors are only available as gluedown products and may have longer lead times. For more information, contact your Karndean representative, or call customer service at 888-266-4343.

Thickness: 3.0mm  
Wear Layer: 30mil (0.7mm)  
Warranty: 20 years

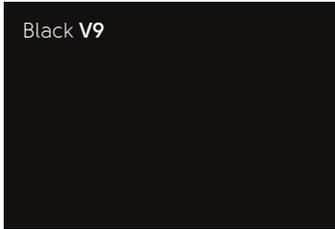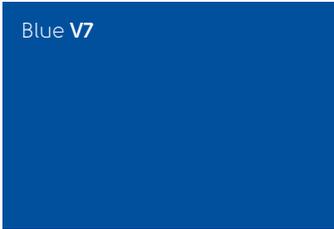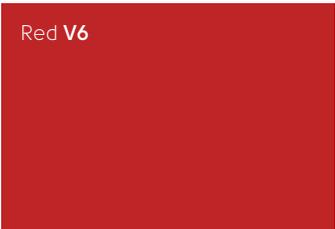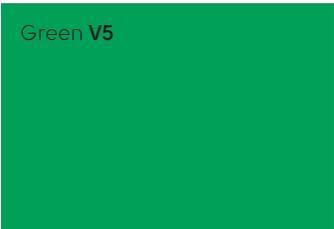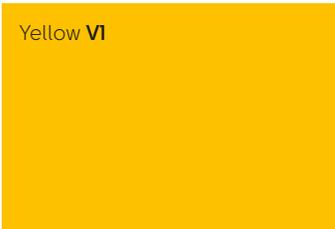

Thickness: 2.5mm  
Wear Layer: 20mil (0.5mm)  
Warranty: 15 years

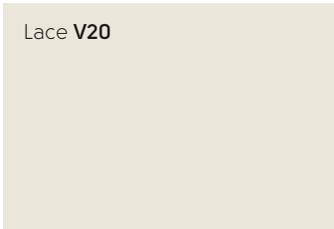

# Design Strips and Grout Strips

Add visual interest to your installation with a slim border or an inlay. Our design strips are narrow pieces of luxury vinyl that can be installed between glued-down planks and tiles. Use them as an aesthetic element, or integrate them as part of a zoning or wayfinding concept.

To confirm compatibility of design strips with the glued-down flooring you're considering, contact your Karndean representative, or call customer service at 888-266-4343.

Widths available:



**3mm** x 75 linear feet | Pack quantity: 25 strips

**10mm** x 75 linear feet | Pack quantity: 25 strips

**Grout Strips** are LVT that can be used with glued-down flooring from the Art Select, Opus and Knight Tile collections. Grout Strips are 3mm wide.



AF06 Beige



AF05 Ivory



AF04 Taupe



AF02 Brown



AF07 Chestnut



AF01 Black



Design Strips can be used with gluedown flooring, available in two widths: 3mm and 10mm.



DS01 Vanilla



DS03 Honey



DS04 Coffee



DS05 Russet



DS06 Chocolate



DS07 Ebony



DS09 Carbon Cross Grain



DS10 Chalk



DS12 Concrete



DS15 Clay



DS16 Charcoal



DS17 Silver



DS20 Sand



DS22 Graphite\*



DS23 Cream

\*Graphite DS22 is only compatible with gluedown flooring from our Knight Tile collection.

# Trims


We stock three products made by the company Versatrim: Slim Trim, Slim Cap and VersaEdgeXL.



**Coordinating trims for all collections with rigid core products are stocked and available through the standard order process.** Trims will ship with your product order unless otherwise specified.


## Slim Trim

This 3-in-1 molding functions as a moisture-proof reducer, T-molding and end cap on flooring with a lower profile.

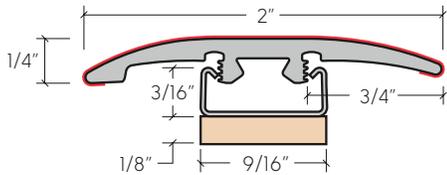


## Slim Cap

Transition from one color of our LVT to another color, or from our LVT to carpet, masonry, sliding doors or other exterior door jambs. Works with floors up to 1/2" (12.7mm).

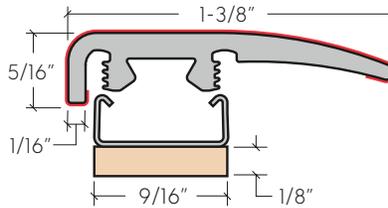

## VersaEdge XL

This 1.5" tall aluminum stair nose can be used on flooring with an overall thickness of up to 0.75" (19mm).

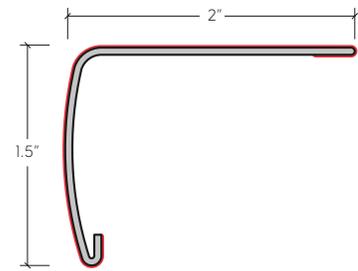

Images are not to scale

All trims are half-size pieces: 46 7/8" long.

For more information about moldings and trims, contact your Karndean representative, or call customer service at 888-266-4343.

To see other Versatrim products, go to [versatrim.com/brands/Karndean](https://versatrim.com/brands/Karndean).

For Versatrim installation information, go to [installationadvice.com](https://installationadvice.com).




VersaEdge XL  
Aged Redwood VGW100T | SCB100

# Design Borders

Add a stylish design element, or create a zoned area. With our templates as a starting point, you can use an order form to determine border colors, widths and pricing. For more information, contact your Karndean representative, or call customer service at 888-266-4343.


## Custom Design Border Templates



**Block**




**Mackintosh**



**Davyne 1 color**




**Mosaic**




**Davyne 2 color**




**Quadrant**




**Diamond**




**Regent**



**Kousa**




**Weave**



**Kousa Framed**




**Windsor**



**Leaf**



**Zig Zag**

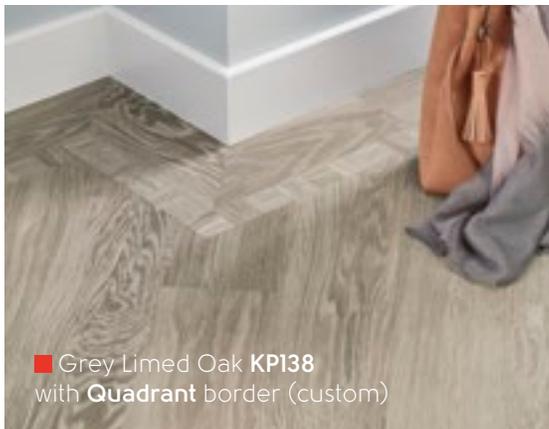

■ Grey Limed Oak KPI38  
with **Quadrant** border (custom)

**Please note:** Orders for custom borders must be confirmed with customer signature before processing begins. For more information, contact your Karndean representative, or call customer service at 888-266-4343.

**Please note:** The distinguishing features of the natural materials that inspire our flooring may appear in borders. Returns cannot be accepted on that basis.

# Adhesives and Flooring Products

Formulated and manufactured to ensure optimum performance, we require the use of our adhesives for installation. Refer to product information for installation; installation guides also can be found in the "Resources" section of our website.

To order, call customer service at 888-266-4343.



## Karndean DrySet Adhesive

- Working time – 8 hours
- Easy, time-saving application with 3/8" nap roller
- Open to foot / wheeled traffic immediately after installation
- Available in 1 gallon or 4 gallon pails
- Covers 350 ft<sup>2</sup> to 450 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 95% RH



## Karndean K-Spray

- Working time - 4 hours
- Easy application
- Requires 80% less adhesive than trowel applications
- Open to foot / wheeled traffic immediately after installation
- 21 oz. can | Covers 150 ft<sup>2</sup> to 167 ft<sup>2</sup> per can
- Can be used on substrates with moisture readings up to 98% RH



## K99 Adhesive

- Working time – 2 hours
- Trowel application
- Available in 1 gallon or 4 gallon pails
- Covers 220 ft<sup>2</sup> to 260 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 99% RH



## Epoxy Adhesive

- Trowel application
- Two-part mix
- Extra-strong bond for areas subject to extreme temperatures
- Covers 125 ft<sup>2</sup> to 150 ft<sup>2</sup> per gallon
- Can be used on substrates with moisture readings up to 90% RH



## QuietChoice Acoustic Underlayment

- Covers 100 ft<sup>2</sup> per roll
- Use with gluedown products to meet IIC 50 code requirements
- Resists mold and mildew
- High shear strength

### KOVARA® / VAPORSHIELD™ 95

2" Gray Seam Tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft<sup>2</sup> per roll
- Suppresses moisture up to 95% RH
- Mold- and fungus-resistant
- Must use **KOVARA® / VAPORSHIELD™ 95**

### KOVARA® / VAPORSHIELD™ MBX

4" White Double-Sided Tape (2 rolls)

2 1/2" Blue Seam Tape

- Rolled-sheet moisture-mitigation membrane
- Rolls are 5 feet wide x 144 feet long
- 720 ft<sup>2</sup> per roll
- Suppresses moisture up to 100% RH
- Mold- and fungus-resistant
- Must use **KOVARA® / VAPORSHIELD™ MBX** and **KOVARA® / VAPORSHIELD™ DS**

### Designflooring Tool Kit

- Combi scribe
- Miter box scissors
- Pressure duo roller
- FasTrimmer top and bottom beveler
- Flex steel straightedge
- Dolphin knife



# resources and support

## ONLINE TOOLS AND RESOURCES


Use our website for spec tools, technical resources and more:  
[karndeancommercial.com](http://karndeancommercial.com)



### Continuing Education Courses

Enhance your professional expertise about luxury vinyl flooring with our CEU program.

See which courses are available at [karndeancommercial.com/ceus](http://karndeancommercial.com/ceus)

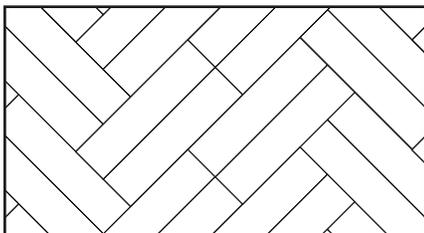

### Design Inspiration

See how custom installations can be created with lay patterns and borders. Our LVT allows you to customize an installation for zoning, wayfinding or added visual appeal.

Go to [karndeancommercial.com/laypatterns](http://karndeancommercial.com/laypatterns)



### BIM Objects Library

Access and download our entire portfolio of wood, stone and abstract designs as BIM components. BIM objects allow you to bring together 3D color models and technical details in one place, providing visibility for both team members and clients, reducing the possibility of miscommunication and costly errors.

Go to [karndeancommercial.com/BIM](http://karndeancommercial.com/BIM)



### Technical Resources

This section of our website is where you'll find commonly needed information and resources, from technical data sheets and installation instructions to the ARCAT® SpecWizard tool.

Go to [karndeancommercial.com/resources](http://karndeancommercial.com/resources)


Inspiration through installation, we're proud to provide support from start to finish. Our website, [karndeancommercial.com](http://karndeancommercial.com), features tools to help you choose and spec the right products. And when it's time to order, we carry strong inventory at three U.S. facilities for timely fulfillment from coast to coast.

## Floorstyle Visualizer

See what our flooring designs look like in a variety of virtual commercial settings – or upload photos to see the designs in the actual space for your project. Floorstyle is an easy way to compare designs, experiment with lay patterns, and decide on the perfect look. Floorstyle can be found in the “Inspiration” section on our website.



You can also  
download CAD files  
through Floorstyle.

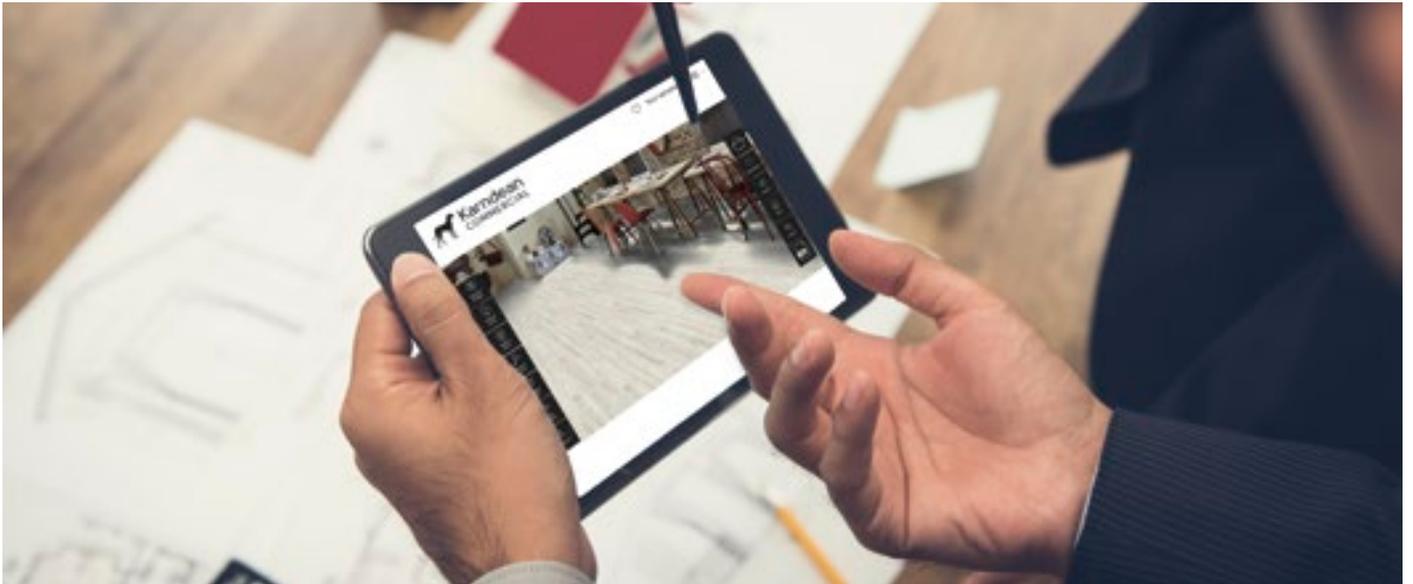

### Material Bank

It's a source of discovery for over 100,000 architects and designers. Use Material Bank to find our products, order samples, and have them by next day.

[materialbank.com](http://materialbank.com)



### Case Studies

Learn more about how our flooring has been used in successful projects. Case studies can be found in the “Inspiration” section on our website.

# CUSTOMER SUPPORT

We're available from 8 am to 8 pm (ET) Monday through Friday. **Call 888-266-4343, or email [info@karndean.com](mailto:info@karndean.com).**

If you're in the area, all three of our U.S. facilities have showrooms where you can get a firsthand look at our products and free full-sized samples.

## Pittsburgh Showroom

1100 Pontiac Court  
Bushy Run Corporate Park  
Export, PA 15632

## Fort Worth Showroom

14201 Sovereign Road  
Suite 141  
Fort Worth, TX 76155

## Las Vegas Showroom

4230 North Fifth Street  
Suite 100  
North Las Vegas, NV 89030

---

## FREE SAMPLES

Order free samples on our website – just go to page of the product you like, and click the “Order free sample” box. If you're interested in full-sized samples or our collection-specific architect folders, get in touch with your Karndean sales representative, or contact our customer service team: 888-266-4343.



[Order free sample](#)





**Karndean**  
Designflooring

**Karndean Designflooring**

1100 Pontiac Court

Export, PA 15632

Phone: 888-266-4343

Email: [info@karndean.com](mailto:info@karndean.com)


[karndeancommercial.com](http://karndeancommercial.com)



## Visualize it Virtually

Use our Floorstyle visualizer to see how different Karndean designs will look in your project space.

Scan QR code to open Floorstyle.



Corporate Headquarters and Showroom 1100  
Pontiac Court, Bushy Run Corporate Park,  
Export, PA 15632 Phone: 888-266-4343 Fax:  
800-887-7043 Email: [info@karndean.com](mailto:info@karndean.com)

West Coast Distribution and Showroom  
4230 N 5th Street, Suite 100, North Las  
Vegas, NV 89030 Fax: 702-248-8534

Central Distribution and Showroom  
14201 Sovereign Road, Suite 141, Fort  
Worth, TX 76155 Fax: 817-553-3920

Karndean Designflooring Canada  
#3-3250 Harvester Road, Burlington,  
Ontario, L7N 3W9 Phone: 866-819-  
6825 Fax: 905-336-2180



**Karndean**  
COMMERCIAL

[karndeancommercial.com](http://karndeancommercial.com)